

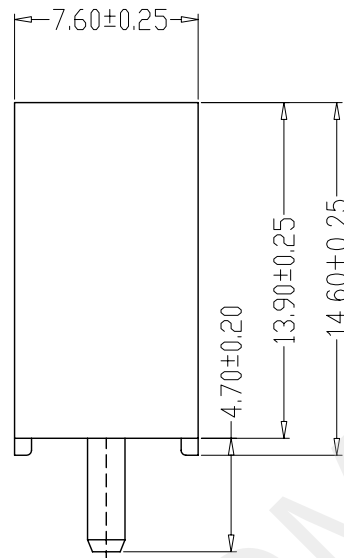
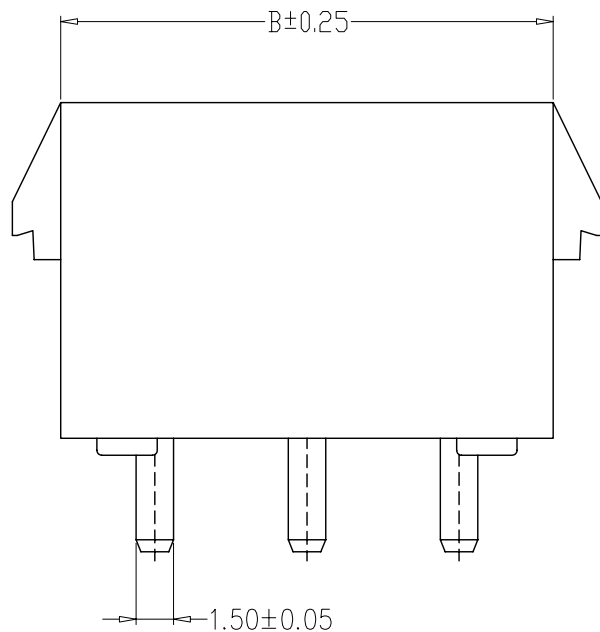


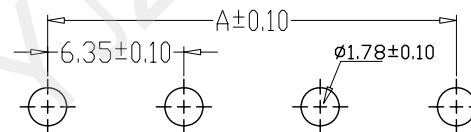

编 号	尺寸 (mm)	
	A	B
HYC40-02A-635	6.35	14.20
HYC40-03A-635	12.70	20.55
HYC40-04A-635	19.05	26.90
HYC40-05A-635	25.40	33.25
HYC40-06A-635	31.75	39.60
HYC40-08A-635	44.45	52.30

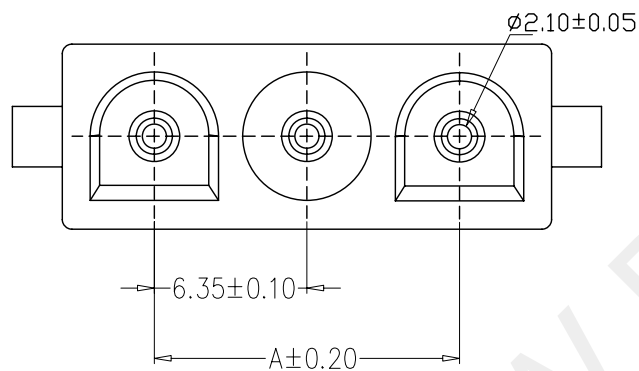

PCB LAYOUT

SPECIFICATIONS

- 1、Current Rating: 15A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltang: 5000V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15

X.' $\pm 2'$ X.X' $\pm 0.5'$



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

63080单排直针

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NO.

SEE TABLE

MOLD NO.

DRAW NO:

SHEET NO.

1 OF 1