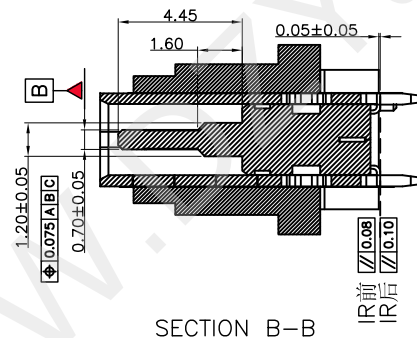
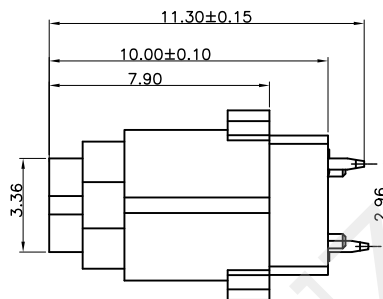
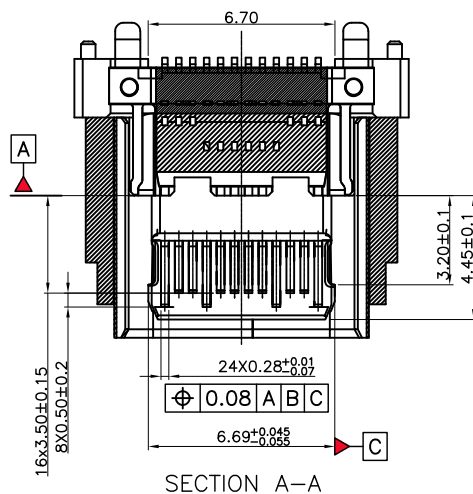
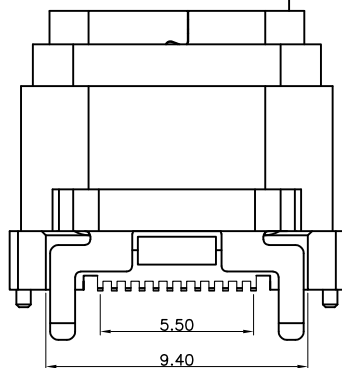
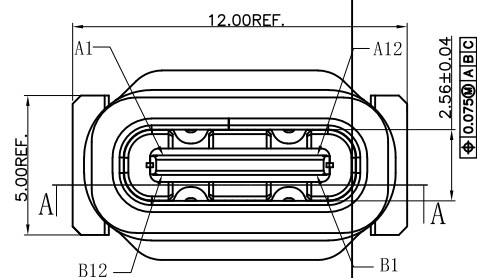
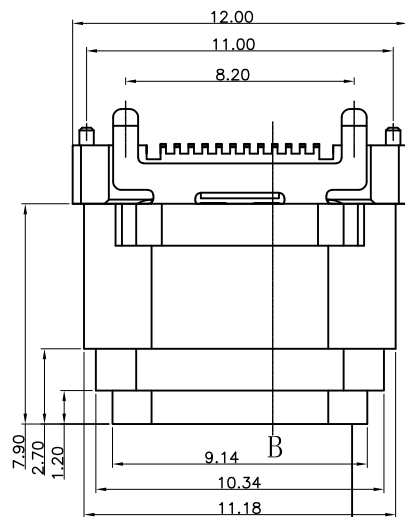


NOTE:

1. MATERIAL:

1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; Black Color

1.2 CONTACT: C7025 (T=0.12mm)

1.3 SHELL: STAINLESS STEEL (T=0.40mm)

1.4 MID PLATE: STAINLESS STEEL (T=0.15mm)

2. ELECTRICAL CHARACTERISTICS:

2.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 10mΩ CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.

2.2 CONTACT CURRENT RATING: 5A FOR COLLECTIVELY POWER SUPPLY PIN (PIN1, A4, A9, A12, B1, B4, B9, B12); 1.25A FOR VCONN PIN; 0.25A FOR OTHER SIGNAL PIN.

2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.

2.4 INSULATION RESISTANCE 100MΩ Min

2.5 OPERATING TEMPERATURE: -40° C ~ 85° C

3. MECHANICAL CHARACTERISTICS:

3.1 MATING FORCE: 5~20 N.

3.2 UNMATED FORCE: 8~20N INITIAL TEST; 6~20N DURABILITY AFTER TEST

3.3 DURABILITY: 10,000 CYCLES

4. PLATING

4.1 TERMINAL CONTACT: Au 3u" PLATING ON CONTACT AREA; TIN 50u" Min TING ON SOLDER TAIL, NI 50u" Min UNDERPLATING OVERALL

4.2 SHELL: 50u" Min. NICKEL ALL OVER,

4.3 MID PLATE: CLEAN


5	CAP	LCP 6007AS UL94V-0	BLACK	1PCS	48H	Reel
4	SHELL	SUS304 T=0.40mm	Ni 50u" Min Plated	1PCS		
3	LATCH	SUS301-H T=0.15mm	NO PLATED	1PCS		
2	CONTACT	C7025 T=0.12mm	Au 3u" PLATING ON CONTACT AREA; TIN 50u" Min TING ON SOLDER TAIL, NI 50u" Min UNDERPLATING OVERALL	1SET		
1	HOUSING	LCP UL94V-0	LCP BLACK UL94V-0	1PCS	益 步	PACKAGING
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY		



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 防水母座24P 立贴H=10.0
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC405-USBC24-100
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2212132110
			SHEET NO. 1 OF 1

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"				USB TYPE C 防水母座24P 立贴H=10.0	
 UNIT: mm [inch]		CHECKED BY:	DATE :	PART NO.	HYC405-USBC24-100
		马跃	2014-02-23	MOLD NO.	
		APPROVED BY:	DATE :	DRAW NO:	HYC-2212132110
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1


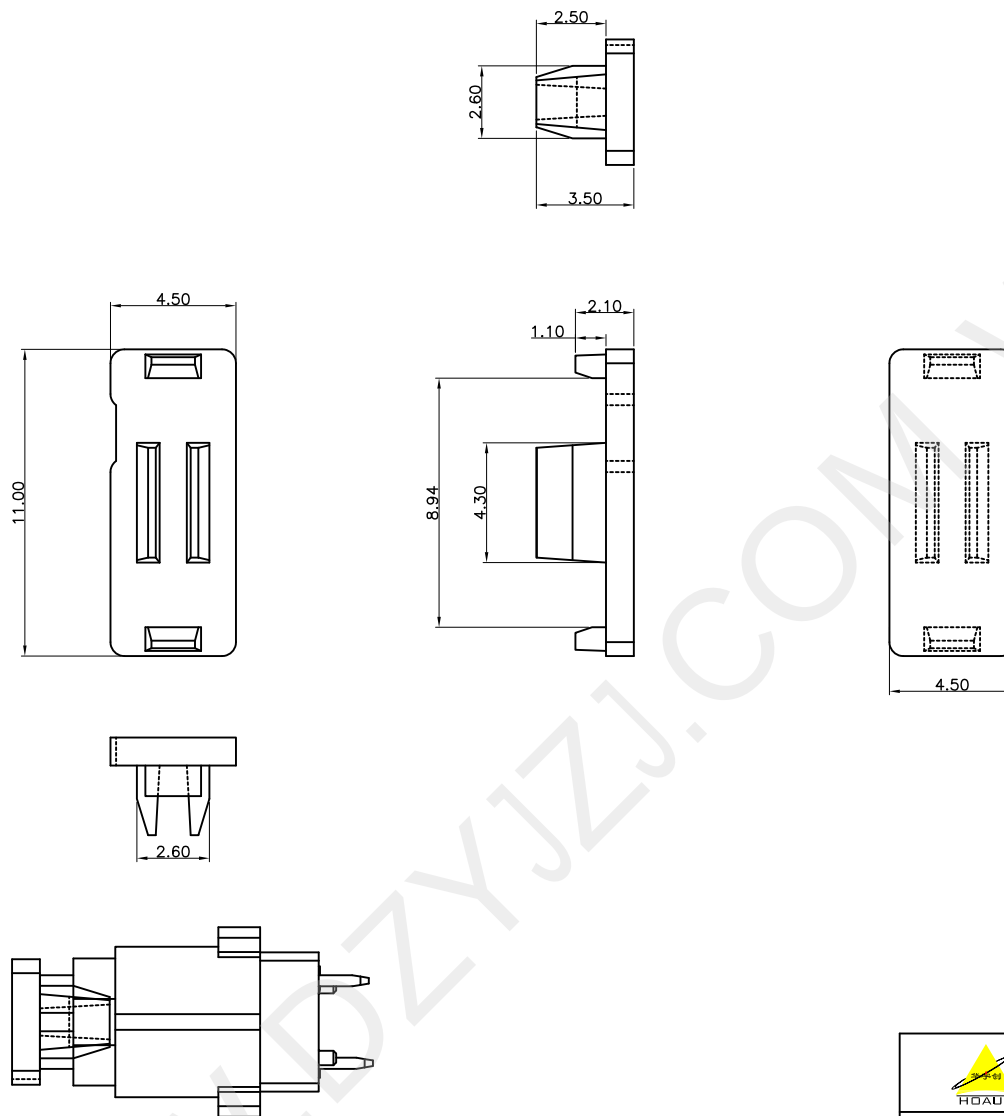


加CAP示意图



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 后塞	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1

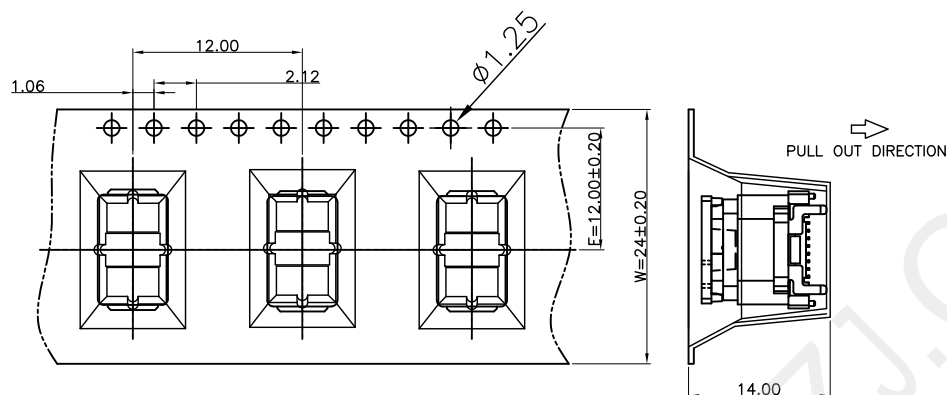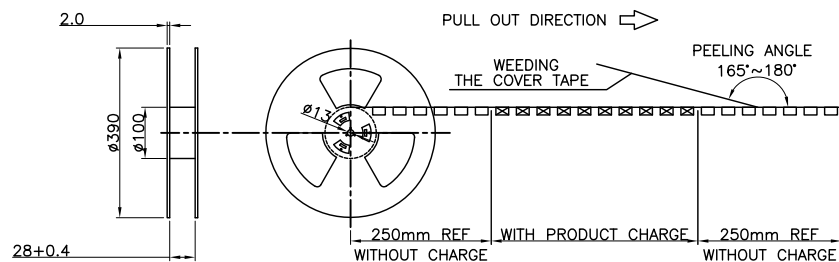

注意:

1. 材料:

纸箱:纤维板,瓦楞,双层壁。

胶带:聚苯乙烯,耐热温度:120℃,白。

卷筒:聚苯乙烯,耐热温度:70℃,蓝色。

包装:聚乙烯,耐热温度:100℃。

2. 剥离强度:0.1 ~ 1.3 N(10 ~ 130克)


3. 脱皮速度:300mm /min。

4. 每个袋子都应包括干燥剂*2。

5. 外箱上贴号物料标签及RHOS标签

6. 同一产品只能装同一纸箱,不允其它产品;

300	10	3000 PCS
PCS/卷	卷/箱	箱

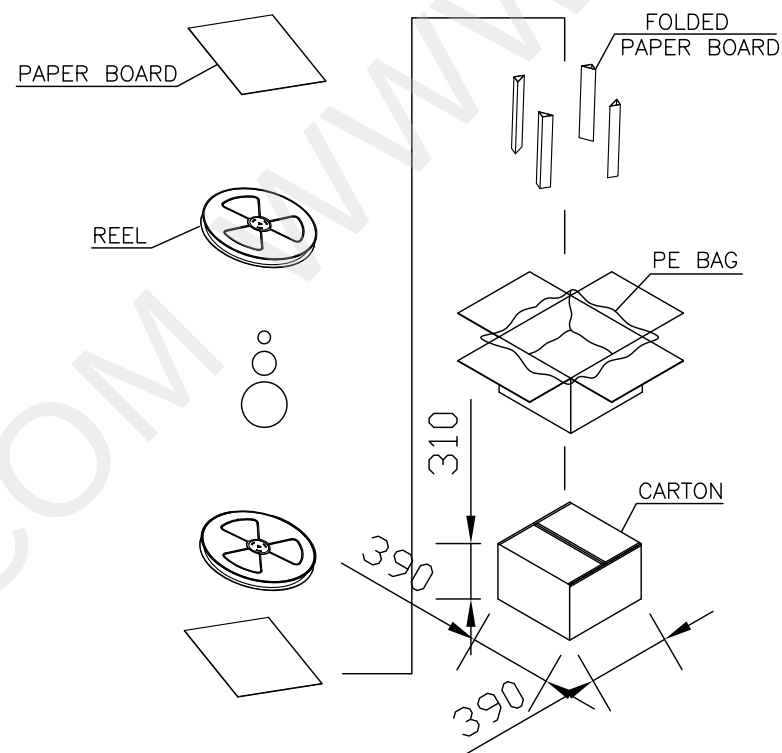

NOTE:

1. QUANTITY: 300 PCS/REEL, 3000PCS/CARTON.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5" UNIT: mm [inch] SCALE: 1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1