


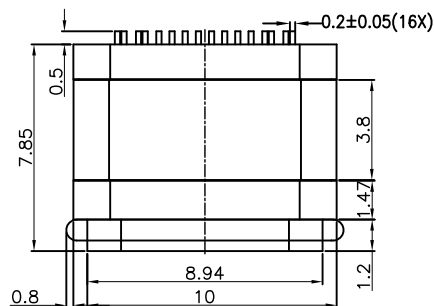

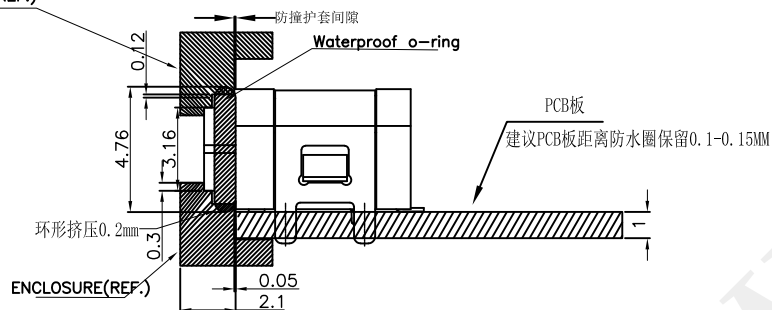


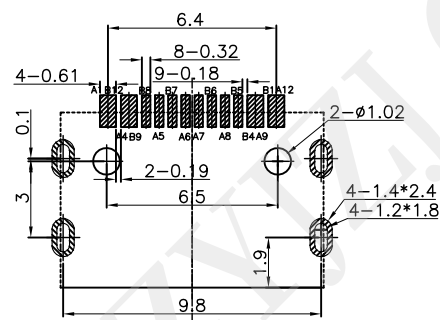

ENCLOSURE(REF.)

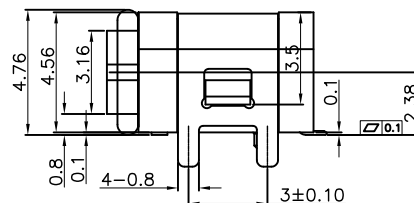

RECOMMENDED SCHEMATIC DRAWING OF CONNECTOR MATCH CHASSIS

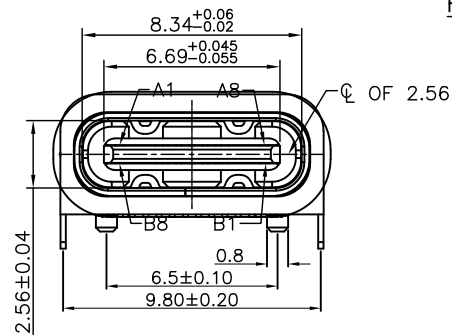

RECOMMENDED PCB LAYOUT

Tolerance:±0.05mm

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME
A1	GND
A4	VBUS
A5	CC1
A6	Dp1
A7	Dn1
A8	SBU1
A9	VBUS
A12	GND

PIN NUMBER	SIGNAL NAME
B12	GND
B9	VBUS
B8	SBU2
B7	Dn2
B6	Dp2
B5	CC2
B4	VBUS
B1	GND

NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 30 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 6N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS:THISPRODUCTIS BASED ON IPX8(1.5M 30min).

(防水等级IPX8 1.5米深 30分钟)

6	Run-RING	1PCS	Silica gel	BLACK
5	SHELL	1PCS	STAINLESS STEEL	NI Plated: 60u"MIN
4	SHIELDING PLATE	1PCS	STAINLESS STEEL	NI Plated: 60u"MIN
3	CONTACT	1SET	Brass	Contact Plating: Au (1u"-3u") Soldering Plating: Au 1u"
2	护套	1PCS	PA46	BLACK
1	胶芯	1PCS	LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	REMARKS



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X" ±2" X.X" ±0.5"

UNIT: mm [inch]
SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

USB TYPE C 防水母座16P 板上SMT L=7.85带柱CH2.38

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC406-USBC16-785

APPROVED BY:

邱敏

DATE :


2014-02-23

DRAW NO:

HYC-2212141543

SHEET NO.

1 OF 1

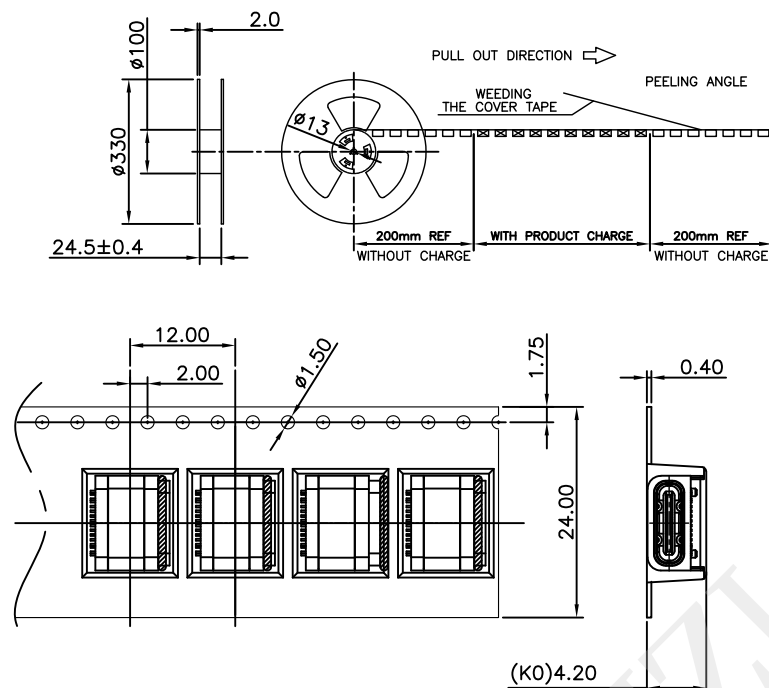

注意:

1. 材料:

纸箱:纤维板,瓦楞,双层壁。

胶带:聚苯乙烯,耐热温度:120℃,白。

卷筒:聚苯乙烯,耐热温度:70℃,蓝色。

包装:聚苯乙烯,耐热温度:100℃。

2. 剥离强度:0.1 ~ 1.3 N(10 ~ 130克)


3. 脱皮速度:300mm /min。

4. 每个袋子都应包括干燥剂*1。

5. 外箱上贴号物料标签及RoHS标签

6. 同一产品只能装同一纸箱,不允其它产品;

7. 包装后,产品铆合面朝内;

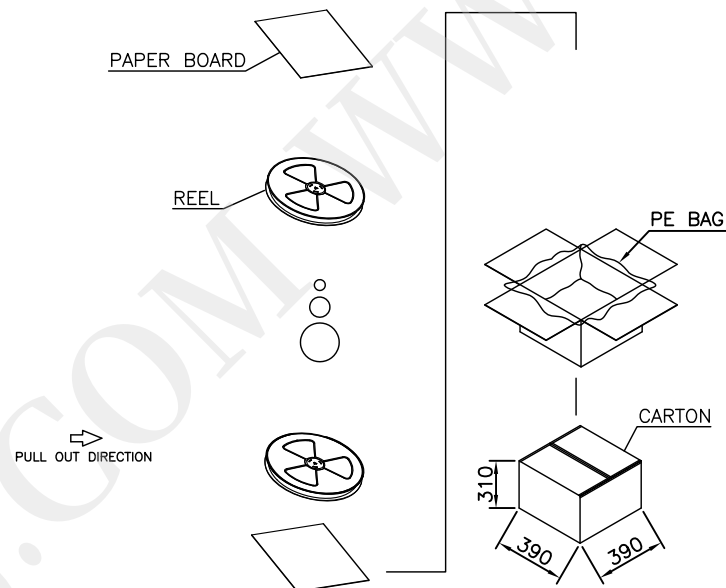

NOTE:

1. QUANTITY: 600 PCS/REEL, 3000PCS/CARTON.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5' UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 包装图	DATE : 2014-02-23	PART NO.	
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	
			SHEET NO.	1 OF 1