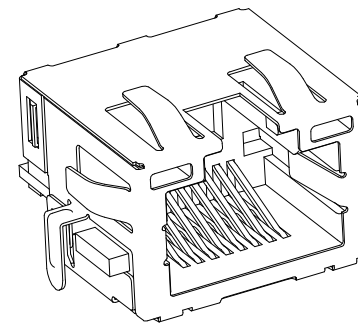
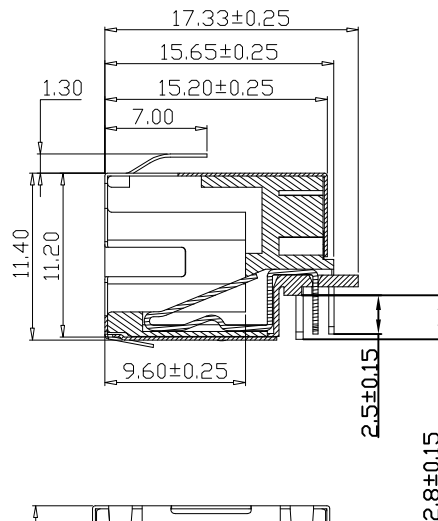
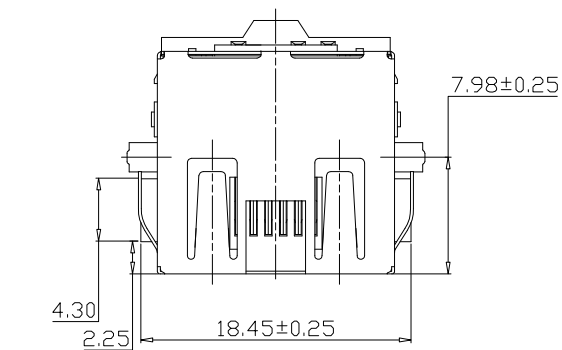


说明:

1. 材质:

胶芯: LCP, UL94V-0; COLOR: BLACK

端子: C5191

外壳: C2680

2. 电镀说明:

端子: 接触区域镀金G.F

焊锡区域镀锡

全部区域镍底

外壳: 表面镀镍

3. 性能说明:

1) 电压: 150V AC RMS.

2) 额定电流: 1.5A.


3) 接触电阻: 40mΩ Max.

4) 绝缘电阻: 500MΩ MIN.

5) 绝缘耐压: 1000V AC.

6) 工作温度: -40° C TO +80° C.

7) 耐久性: 500 Mating Cycles MIN.

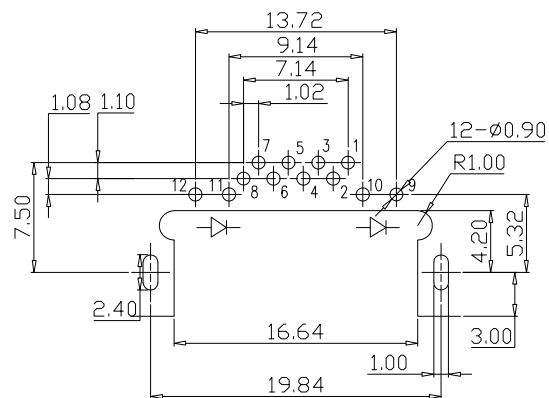

RECOMMENDED PCB LAYOUT (TOP VIEW)

(ALL TOLERANCES ARE ±0.05)



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY :	DATE :	PART NAME:
	陈一鸣	2014-02-23	RJ45 90° DIP 带灯带弹 沉板
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE :	PART NO.
	马跃	2014-02-23	HYC413-RJ45-300
	APPROVED BY:	DATE :	DRAW NO:
	邱敏	2014-02-23	HYC-2209211042
			SHEET NO.
			1 OF 1