


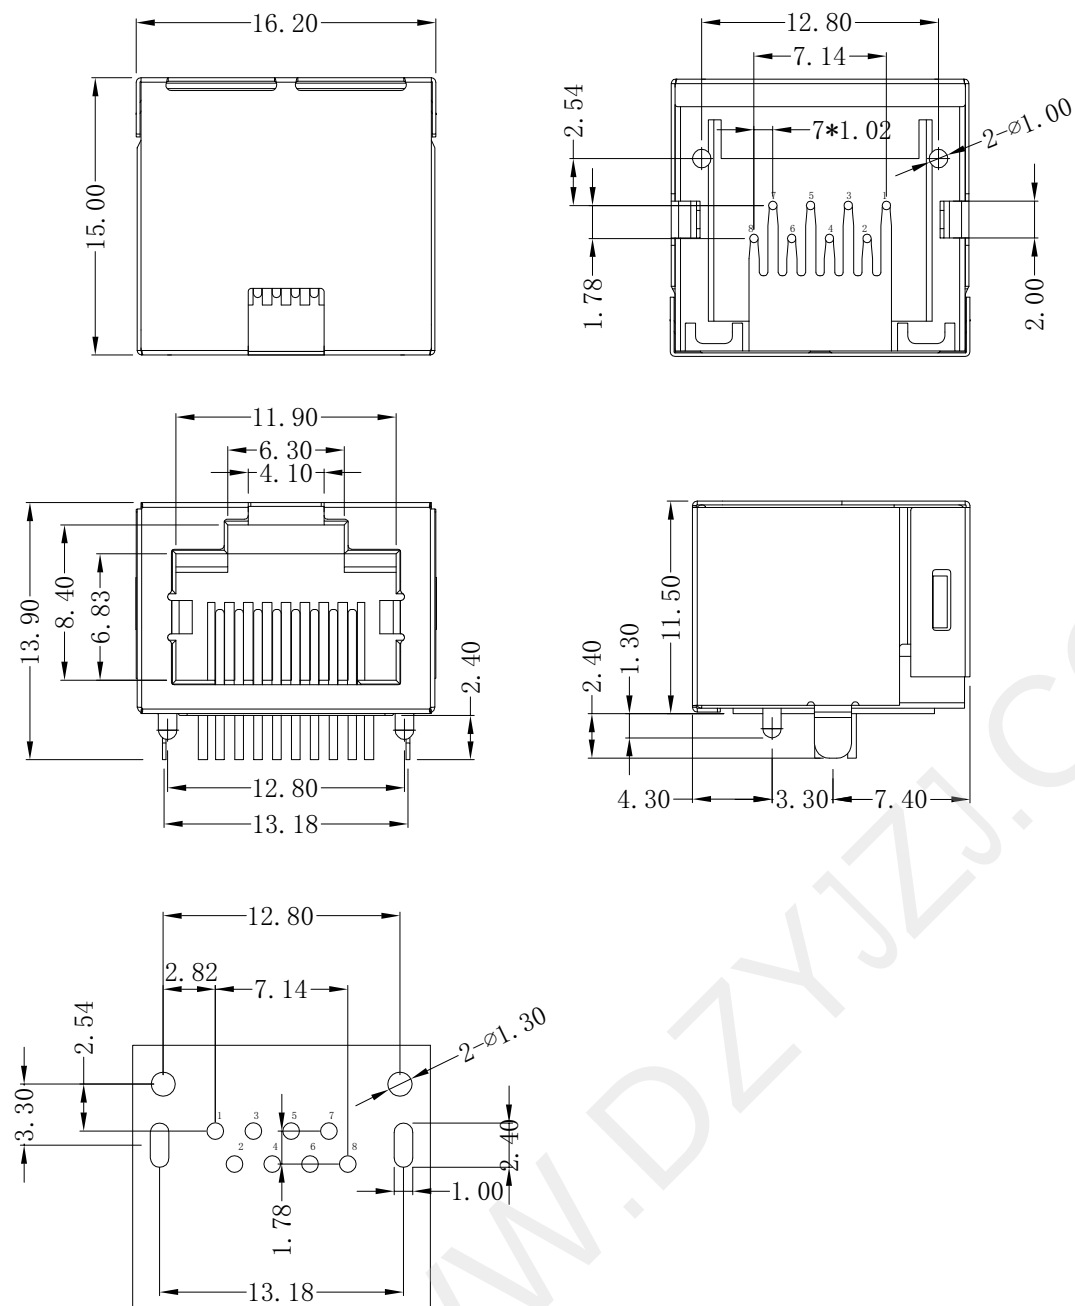

说明:

1. 材质:

胶芯: LCP, UL94V-0; COLOR: BLACK

端子: C5191

外壳: C2680

2. 电镀说明:

端子: 接触区域镀金G.F

焊锡区域镀锡

全部区域镍底

外壳: 表面镀镍

3. 性能说明:

- 1) 电压: 150V AC RMS.
- 2) 额定电流: 1.5A.
- 3) 接触电阻: 40m Ω Max.
- 4) 绝缘电阻: 500M Ω MIN.
- 5) 绝缘耐压: 1000V AC.
- 6) 工作温度: -40° C TO +80° C.
- 7) 耐久性: 500 Mating Cycles MIN.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X" ± 2 " X.X" ± 0.5 "	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MINI RJ45 90° DIP 无灯带屏蔽	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC419-RJ45-115	MOLD NO.
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2211141315	SHEET NO. 1 OF 1