

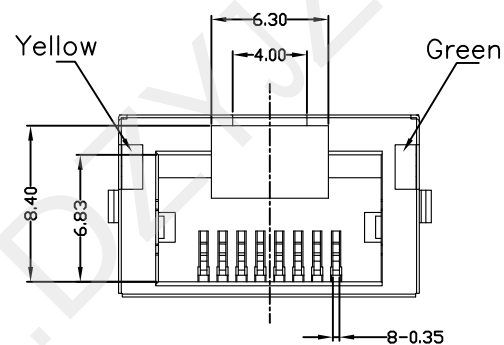
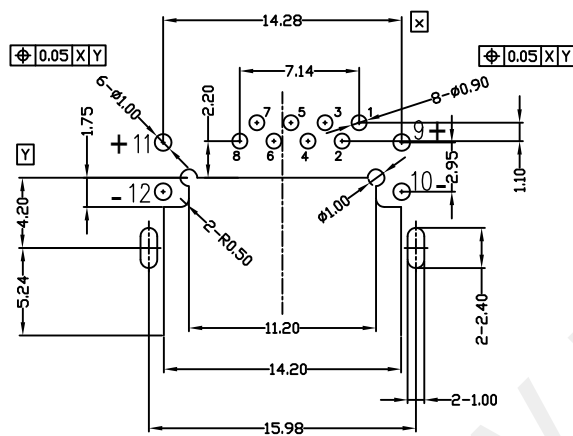
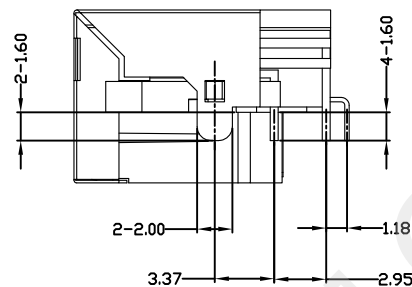
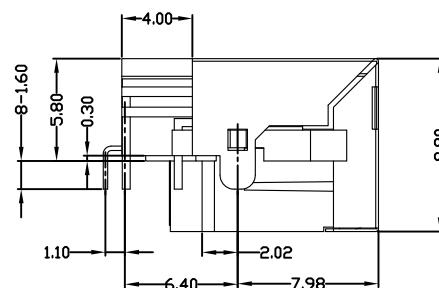
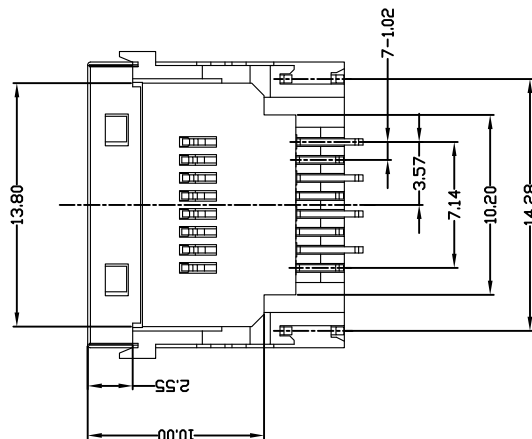
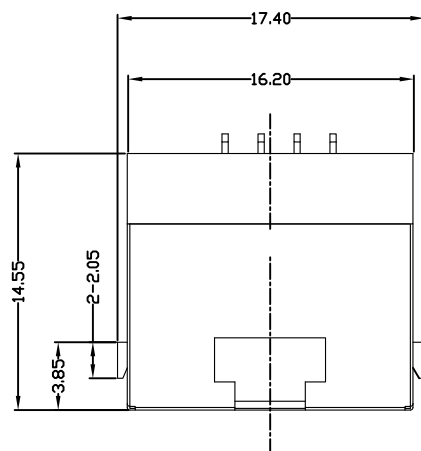


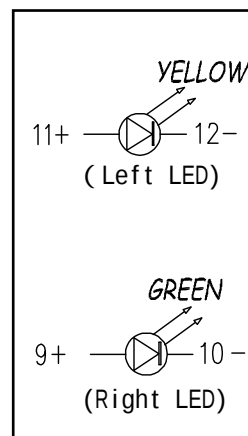

Recomend PCB Layout

Tolerance:  $\pm 0.05\text{mm}$  (Top view)

- 1.Recomended PCB layout thickness:  $1.20 \pm 0.05$
- 2.Processing temperature should not exceed 260 centigrade.

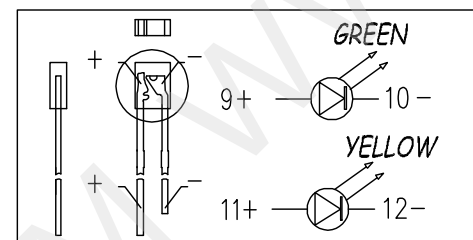

(备注：注意LED灯正负极性)

## Notes:

## 1.Materials:

Housing:Thermoplastic,UL94V-0,Color is black.  
Terminal:Phosphor Bronze.  
Shell:Stainless

## 2.Plating:

Terminal:Gold flash on contact area.  
Matte tin 80u" on solder tails.  
Nickel 50u" underplated over all.

Shell:Nickel 50u" plated over all.

## 3.LED plated:

DIP solder plating:Matte tin 100u" on all.

## 4.Mylar:Clear polyester.



深圳市华宇创精密电子有限公司

|                                                                                                                   |                    |                      |                                     |                     |
|-------------------------------------------------------------------------------------------------------------------|--------------------|----------------------|-------------------------------------|---------------------|
| TOLERANCE:<br>X.X $\pm 0.30$<br>X.XX $\pm 0.25$<br>X.XXX $\pm 0.15$<br>X." $\pm 2^{\circ}$ X.X" $\pm 0.5^{\circ}$ | DRAWN BY :<br>陈一鸣  | DATE :<br>2014-02-23 | PART NAME:<br>RJ45 90 ° DIP 沉板带灯带屏蔽 |                     |
|                                                                                                                   | CHECKED BY:<br>马跃  | DATE :<br>2014-02-23 | PART NO.<br>HYC438-RJ45-980         | MOLD NO.            |
| UNIT: mm [inch]<br>SCALE:1:1 SIZE: A4                                                                             | APPROVED BY:<br>邱敏 | DATE :<br>2014-02-23 | DRAW NO:<br>HYC-2302171213          | SHEET NO.<br>1 OF 1 |
|                                                                                                                   |                    |                      |                                     |                     |