
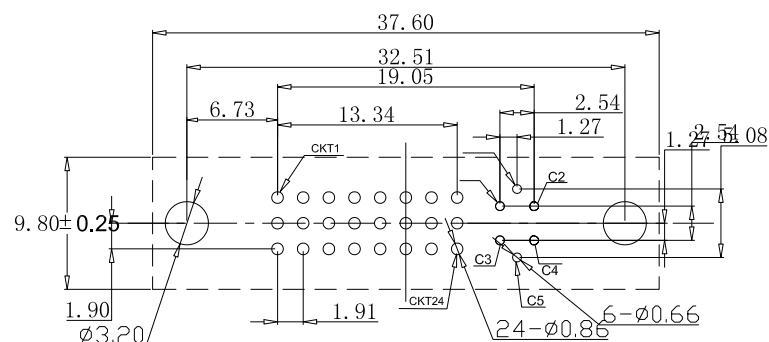
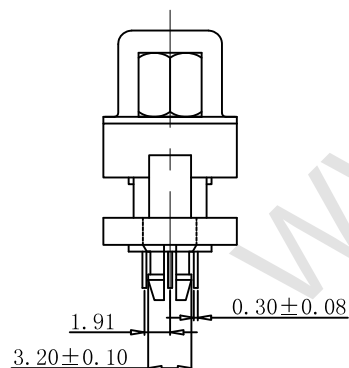
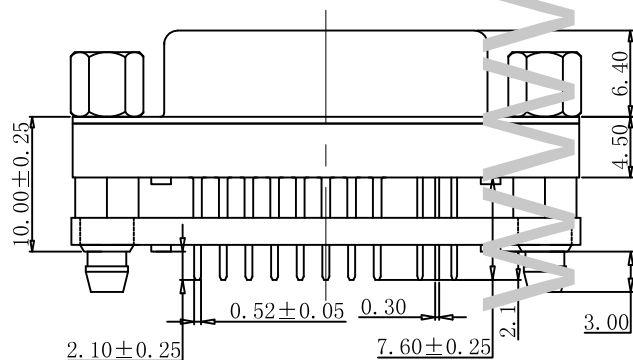


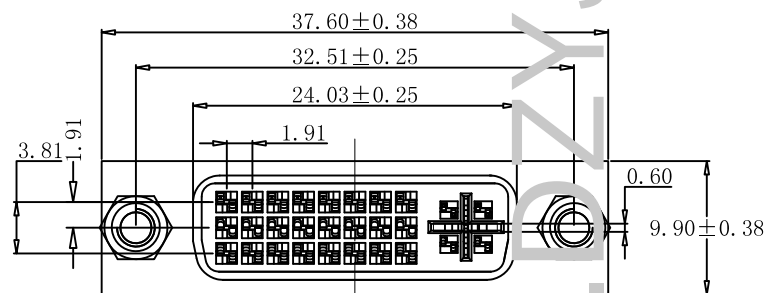

P. C. B LAYOUT

NOTE:

1.MATERIALS AND FINISHED

INSULATOR : PA66+30% GF UL 94V-0.

SHELL : STEEL, NI OR SN FINISHED

CONTACT MATERIAL : BRASS, SELEVITE GOLD FINISHED

RIVETED INSERT: BRASS MATERIAL ,TIN FINISHED

WITH #4-40 THREADED ASSEMBLED

2. ELECTRICAL CHARACTERISTICS

CURRENT RATING : 1.5 AMP DC

VOLTAGE RATING: 40 V DC

CONTACT RESISTANCE :20 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.

INSULATION RESISTANCE : 1000 MEGAOHMS MIN.

3. MECHANICAL

MATING FORCE:4.5Kgf MAX.

UNMATING FORCE:1.0-4.0 Kgf

4. ENVIRONMENTAL

OPERATING TEMPERATURE: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$

STORAGE TEMPERATURE: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

5.HOW TO ORDER:



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X: ±2" X.X ±0.5"				DVI 24+5 母座H10.0mm 插板锁螺丝	
		CHECKED BY:	DATE :	PART NO.	HYC50-DVI29-100
		马跃	2014-02-23	MOLD NO.	
UNIT: mm [inch]		APPROVED BY:	DATE :	DRAW NO:	HYC-2411051559
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1