
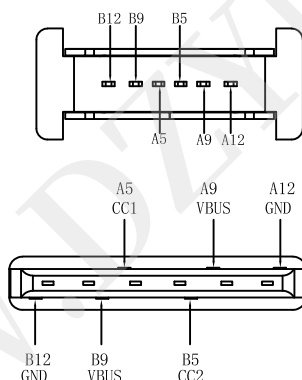
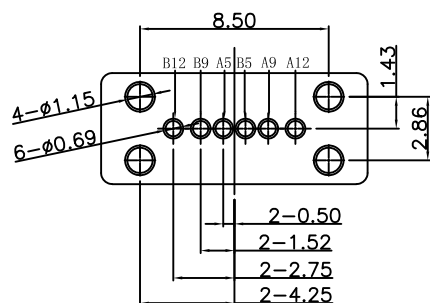
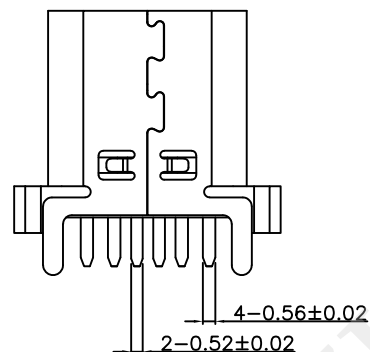
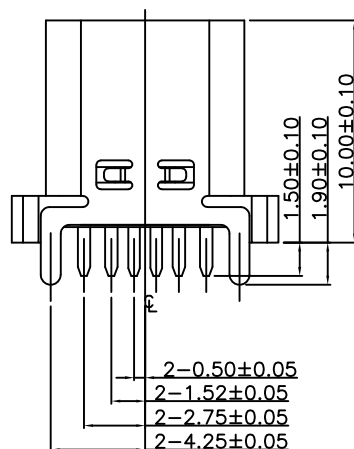



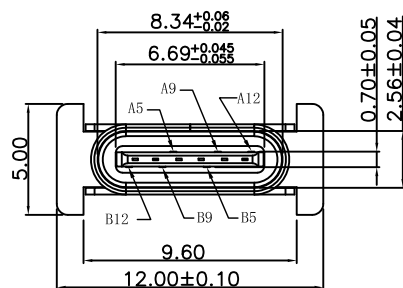

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm$ 0.05mm

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1			B12	GND	First
A2			B11		
A3			B10		
A4			B9	VBUS	First
A5	CC1	Second	B8		
A6			B7		
A7			B6		
A8			B5	CC2	Second
A9	VBUS	First	B4		
A10			B3		
A11			B2		
A12	GND	First	B1		
SHELL		GND	SHELL		GND

NOTES:

特性: Specifications

电器 Electrical:

接触阻抗: 初始最大不超过40m Ω Max, 测试后变化值不超过10m Ω Max

耐电压: AC200V 60S/MIN, 0.5mA Max:DC500V, 60S/MIN, 100 Ω Max

绝缘阻抗: 100M ohms MIN

额定电流: 2A MAX

额定电压: 10V MAX

材料: Material:

Molding: LCP料黑色耐高温塑胶

端子: C2680 T=0.20mm

外壳: SUS201 T=0.30mm

电镀规格:

端子: 半金锡, 接触点镀金1u", 焊线处镀雾锡40-80u".

外壳: 镀镍80u"

环保要求: ROHS, REACH标准.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X $\pm$ 0.30 X.XX $\pm$ 0.25 X.XXX $\pm$ 0.15 X.' $\pm$ 2" X.X' $\pm$ 0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 母座6P 180° DIP H=10.0
UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC548-USBC06-100
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2408061932
			SHEET NO. 1 OF 1