

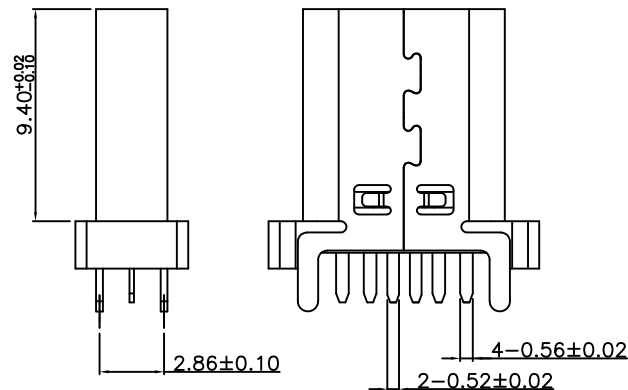
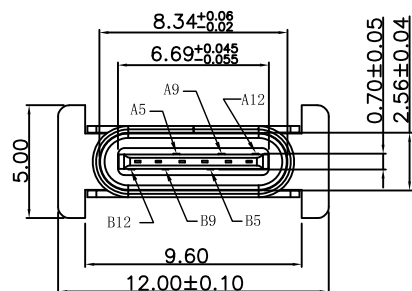
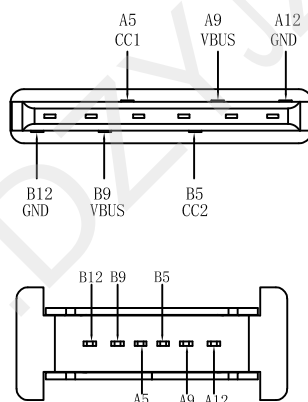


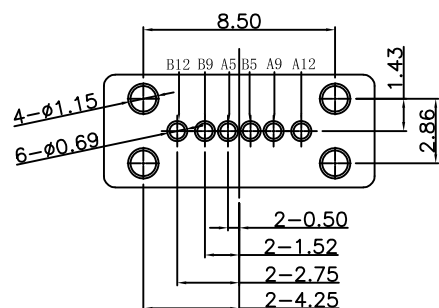

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1			B12	GND	First
A2			B11		
A3			B10		
A4			B9	V _{BUS}	First
A5	CC1	Second	B8		
A6			B7		
A7			B6		
A8			B5	CC2	Second
A9	V _{BUS}	First	B4		
A10			B3		
A11			B2		
A12	GND	First	B1		
SHELL		GND	SHELL		GND

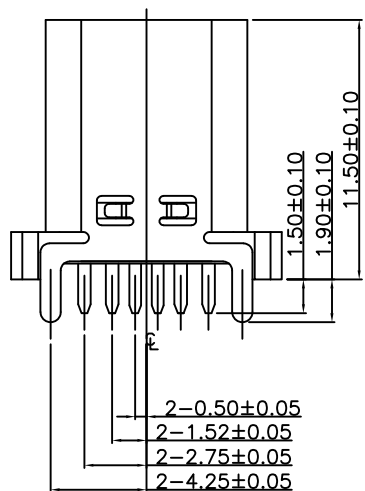

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

NOTES:

特性: Specifications

电器 Electrical:

接触阻抗: 初始最大不超过40m Ω Max, 测试后变化值不超过10m Ω Max

耐电压: AC200V 60S/MIN, 0.5mA Max:DC500V, 60S/MIN, 100 Ω Max

绝缘阻抗: 100M ohms MIN

额定电流: 2A MAX

额定电压: 10V MAX

材料: Material:

Molding: LCP料黑色耐高温塑胶

端子: C2680 T=0.20mm

外壳: SUS201 T=0.30mm

电镀规格:

端子: 半金锡, 接触点镀金1u", 焊线处镀雾锡40-80u".

外壳: 镀镍80u"

环保要求: ROHS, REACH标准.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 母座6P 180° DIP H=11.5
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC549-USBC06-115
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2408081001
			SHEET NO. 1 OF 1