

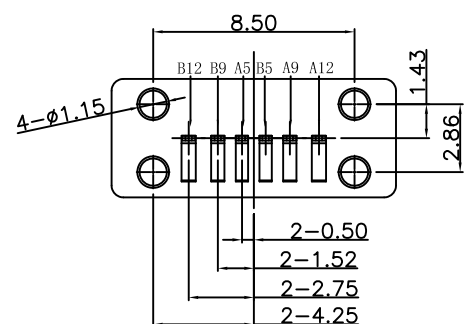
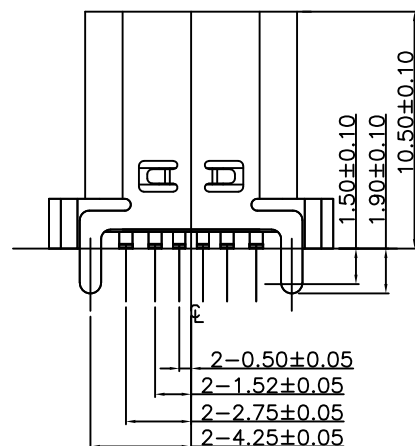
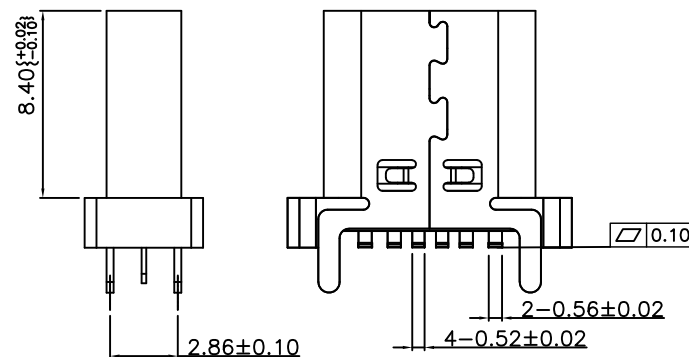


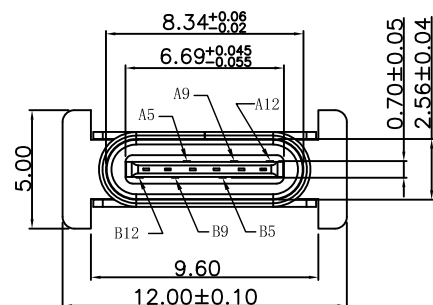

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

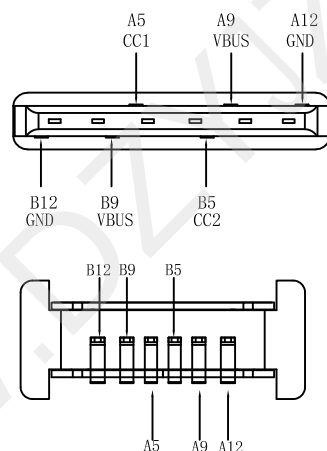

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1			B12	GND	First
A2			B11		
A3			B10		
A4			B9	V_{BUS}	First
A5	CC1	Second	B8		
A6			B7		
A7			B6		
A8			B5	CC2	Second
A9	V_{BUS}	First	B4		
A10			B3		
A11			B2		
A12	GND	First	B1		
SHELL		GND	SHELL		GND

NOTES:

特性: Specifications

电器 Electrical:

接触阻抗：初始最大不超过40mΩ Max, 测试后变化值不超过10mΩ Max

耐电压: AC200V 60S/MIN, 0.5mA Max; DC500V, 60S/MIN, 100ΩMax

绝缘阻抗: 100M ohms MIN

额定电流: 3A MAX

额定电压: 10V MAX

材料: Material:

Molding: LCP料黑色耐高温塑胶

端子: C2680 T=0.20mm

外壳: SUS201 T=0.30mm

电镀规格:


端子: 半金锡, 接触点镀金1u", 焊线处镀雾锡40-80u".

外壳：镀镍80u"

环保要求: ROHS, REACH标准.



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	USB TYPE C 母座6P 立贴 H=10.5 四脚插板	
X.XX ±0.25		CHECKED BY:	DATE :	PART NO.	HYC553-USBC06-105
X.XXX ±0.15				MOLD NO.	
X: ±2° X.X ±0.5°		APPROVED BY:	DATE :	DRAW NO:	HYC-2408081021
				SHEET NO.	1 OF 1
UNIT: mm [inch]		邱敏	2014-02-23		
SCALE:1:1	SIZE: A4				