
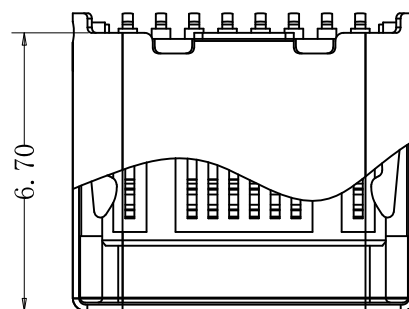
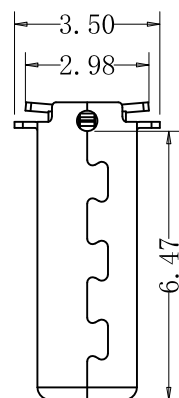
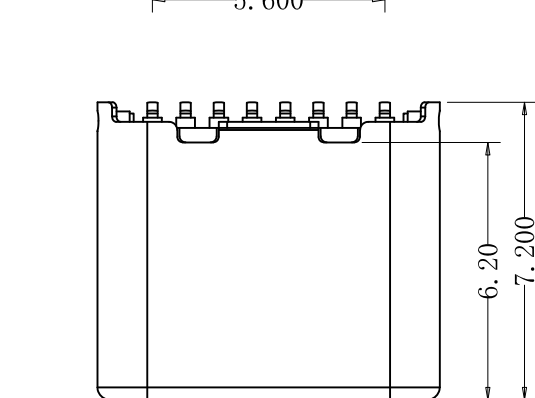
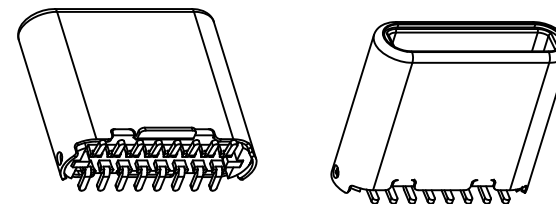
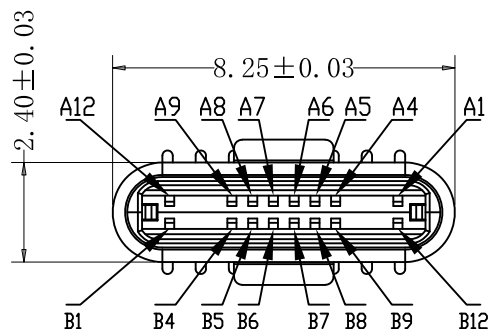


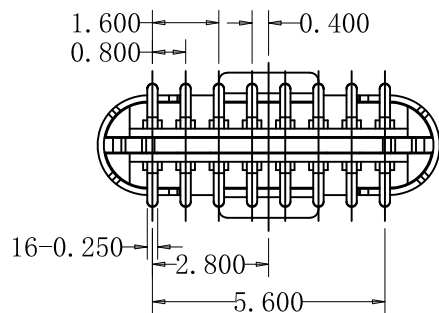

type-c-16PIN

SMT式

特性: Specifications

电器 Electrical:

- 1、额定电压: 5V DC(RMS)
- 2、额定电流: 1-2A
- 3、工作环境: -25° C~+80° C

材料: Material:

塑胶: UL 94V-0 LCP料高温塑胶

主体: LCP料黑色耐高温塑胶

端子: 磷铜C2680

外壳: 不锈钢201.

卡勾: 不锈钢201.



电镀规格:

端子: 半金锡, 接触点镀金1u, 焊线处镀锡40-80u.

外壳: 镀亮镍80u盐雾24H (备注: 可依客户要求电镀外壳)

卡钩: 前镍后锡

盐雾测试: 5%的盐水, 35° C, 48H表面无氧化

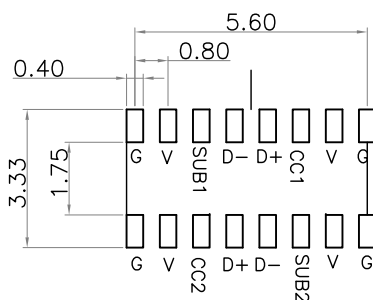

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU1
A6	DP1	B7	DN1
A7	DN1	B6	DP1
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2° X.X' ±0.5° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 公头16P 立式贴片7.2H 无脚
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC598-USBC16-720
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO. /
			DRAW NO: HYC-2508131655
			SHEET NO. 1 OF 1