
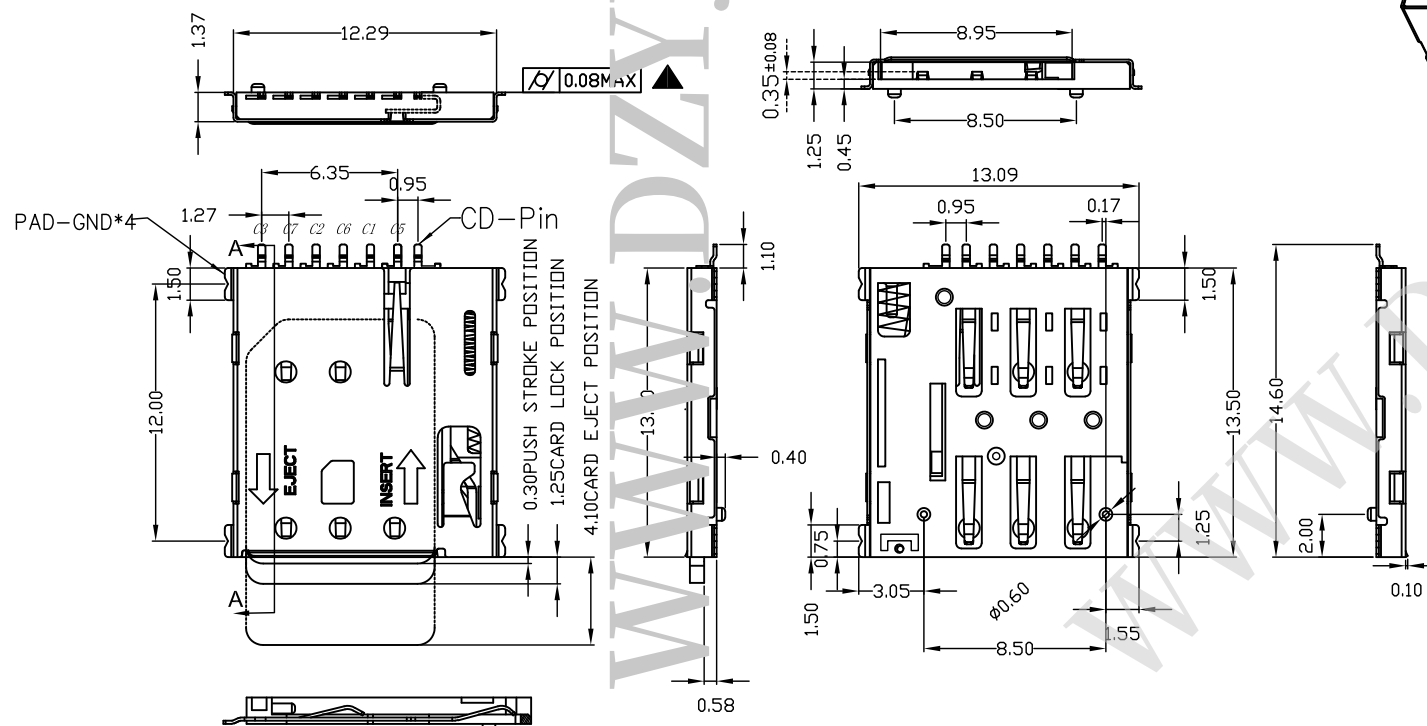


SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出

CIRCUIT DIAGRAM FOR CARD DETECT SWITCH



Specification

MATERIAL:



Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: Copper Alloy
SHELL: SUS

PLATING:

Contact: Plated 50u" Ni, Over All AU GOLD 1U
Shell: Plated 50u" Ni Over All, PAD Au 1U

Electrical:

Current Rating :0.5Amps max.
Voltage Rating :125V AC/DC
Ambient Temperature Range :-20° C~+60° C
Storage Temperature Range :-40° C~+70° C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:100m Ω max.
Insulation Resistance:1000M Ω min./500VDC
Mating Cycles:3000 Insertions
产品耐温温度: 260度

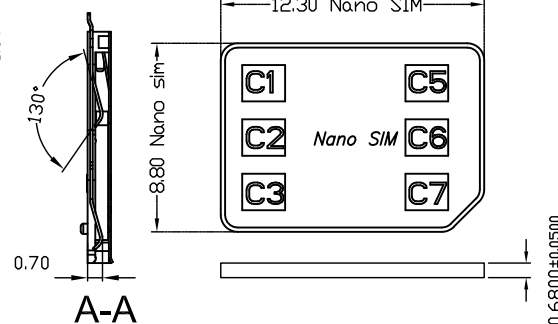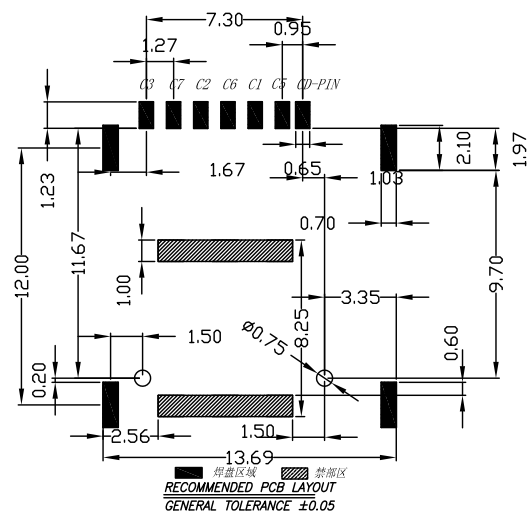

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: NANO SIM PUSH 1.37H 带CD PIN 带柱
UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC63-SIM07-137
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2509230933
			SHEET NO. 1 OF 1