

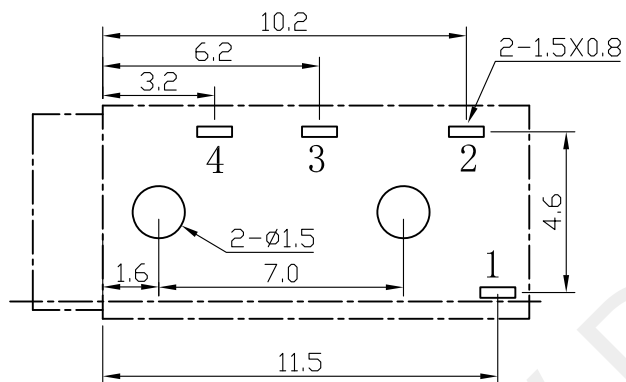
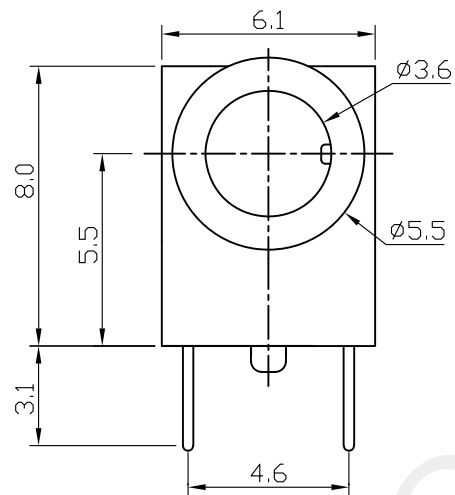
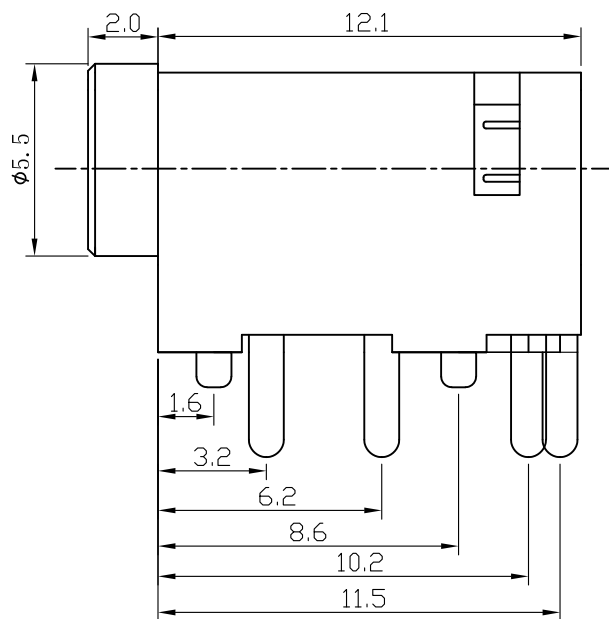





T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-sided view)



技术要求

- 1、插入力: 3~30N(0.3~3.0kgf)
- 2、拔出力: 3~30N(0.3~3.0kgf)
- 3、接触电阻: $\leq 50\text{m}\Omega$
- 4、绝缘电阻: $>100\text{M}\Omega$ DC 500V
- 5、耐电压: AC 500V 1min无飞弧及击穿
- 6、寿命: 5000 10~20次/min
- 7、额定负载: DC 12V 1A
- 8、适用温度范围: $-25\sim 85^{\circ}\text{C}$
- 9、推荐使用插头:

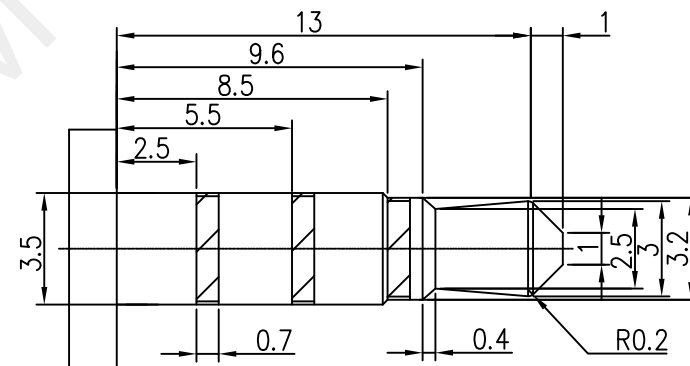

5	PJ-3120A-05	4号脚	1PCS	C5191磷铜=0.25	镀银	环保
4	PJ-3120A-04	3号脚	1PCS	C5191磷铜=0.25	镀银	环保
3	PJ-3120A-03	2号脚	1PCS	C5191磷铜=0.25	镀银	环保
2	PJ-3120A-02	1号脚	1PCS	C5191磷铜=0.25	镀银	环保
1	PJ-3120A-01	基座	1PCS	PPA (BLACK)	黑色	环保
序号	零件图代号	名称	数量	材料	镀层/颜色	备注



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." $\pm 2^{\circ}$ X.X" $\pm 0.5^{\circ}$ UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PJ-3120A
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-PJ3120A-800
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2509121134
			SHEET NO. 1 OF 1