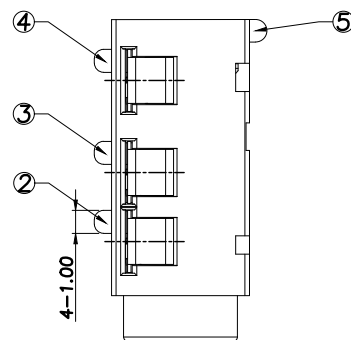
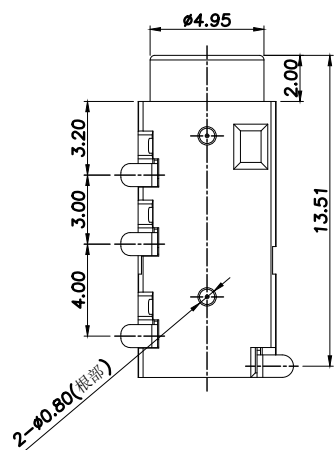
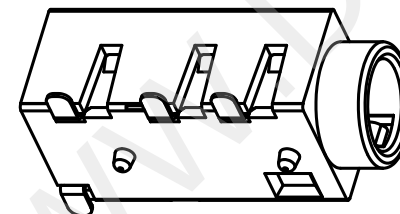
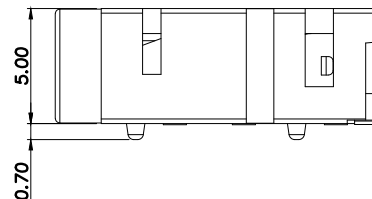

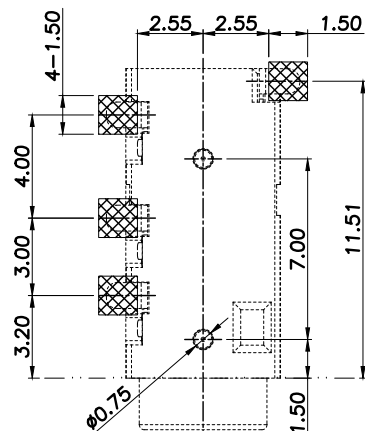
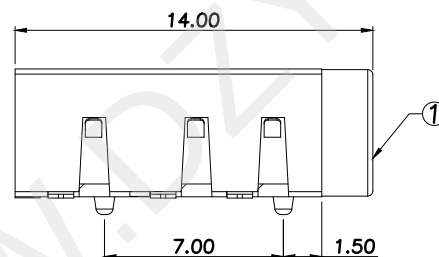


CIRCUIT DIAGRAM

RECOMMENDED P.C.B
TOP VIEW

NOTES:

1. MATERIAL: SEE "TABLE 1";

2. FINISH: SEE "TABLE 1";

3. ELECTRICAL :

3-1.CONTACT CURRENT RATING :DC 30V 0.5A

3-2.INSULATION RESISTANCE :

100 MEGAOHMS MIN.

3-3.DIELECTRIC WITHSTANDING VOLTAGE :

100VAC MIN.

4.MECHANICAL CHARACTERISTICS :

4-1. MATING FORCE: 3~20N;

4-2. UNMATING FORCE: 3~20N(INITIAL),2~20N(AFTER 5000 CYCLES);

4-3.DURABILITY : 5,000 MATING CYCLES.

4-4.OPERATING TEMPERATURE : -30°C TO +70°C

TABLE 1:

⑤	弹片端子	1	黄铜	镀亮锡	T=0.15mm
④	弹片端子	1	黄铜	镀亮锡	T=0.15mm
③	弹片端子	1	黄铜	镀亮锡	T=0.15mm
②	弹片端子	1	黄铜	镀亮锡	T=0.15mm
①	主体胶芯	1	PPA	黑色	
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK



深圳市华宇创精密电子有限公司


TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2° X.X' ±0.5°



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

PJ-320D

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC02-PJ320D-500

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2509091112

SHEET NO.

1 OF 1