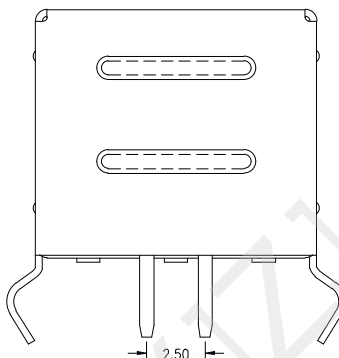
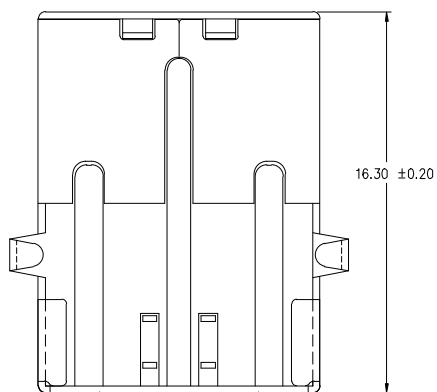
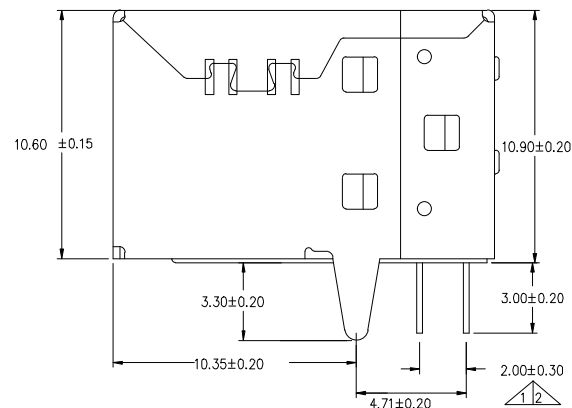
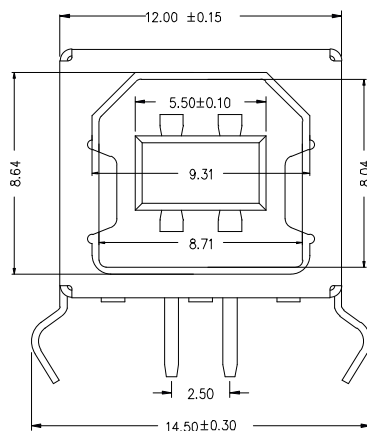


| X(材质)  | X(颜色)       |
|--------|-------------|
| 铜壳 (C) | 黑/black (B) |
| 铁壳 (I) | 白/white (W) |

## 规格说明: Specifications:

## 电气特性: Electrical:

1. 额定电流: Current Rating  
1.5A/contact terminal
2. 额定电压: Voltage Rating  
30V DC
3. 接触阻抗: Contact Resistance  
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:  
1000MEGA ohms MIN

## 原材料: Raw material:

1. 塑胶: Plastic cement:  
Hing Temperature Thermoplastics,  
PBT White/Black
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: SPCC/Copper Alloy C2680

## 电镀: Electroplate:

1. 端子: Contact: Plated Gold in Mating Area;  
Tin On Solder Tails
2. 外壳: Shell:  
Nickel Plating



深圳市华宇创精密电子有限公司

|                                                                            |                    |                      |                                 |                     |
|----------------------------------------------------------------------------|--------------------|----------------------|---------------------------------|---------------------|
| TOLERANCE:<br>X.X ±0.30<br>X.XX ±0.25<br>X.XXX ±0.15<br>X.* ±2* X.X* ±0.5* | DRAWN BY :<br>陈一鸣  | DATE :<br>2014-02-23 | PART NAME:<br>USB BF 90 ° DIP   |                     |
|                                                                            | CHECKED BY:<br>马跃  | DATE :<br>2014-02-23 | PART NO.<br>HYC07-USBB04-145-XX | MOLD NO.            |
|                                                                            | APPROVED BY:<br>邱敏 | DATE :<br>2014-02-23 | DRAW NO:<br>HYC-2306301604      | SHEET NO.<br>1 OF 1 |
|                                                                            | SCALE:1:1          | SIZE: A4             |                                 |                     |