

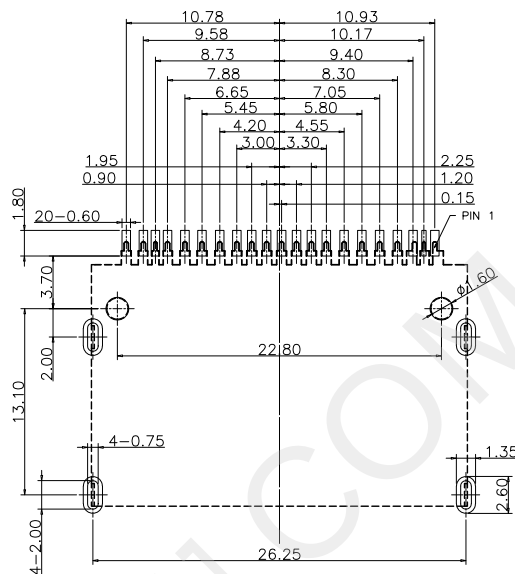

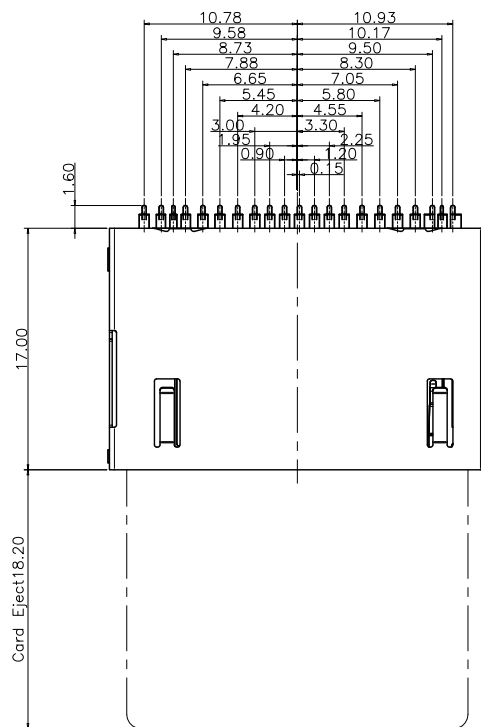
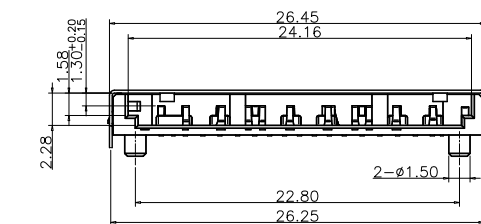
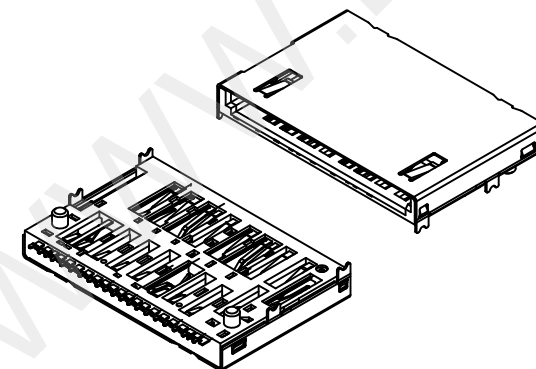


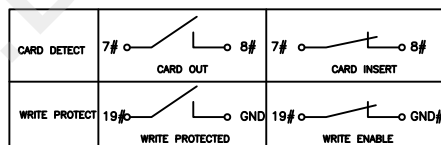

RECOMMENDED PCB LAYOUT
TOLERANCE UNLESS OTHERWISE IS ± 0.05

- PAD AREA
- GND PATTERN ONLY
- KEEP OUT AREA
- NO COPPER AREA (NO Trace&Via&GND)

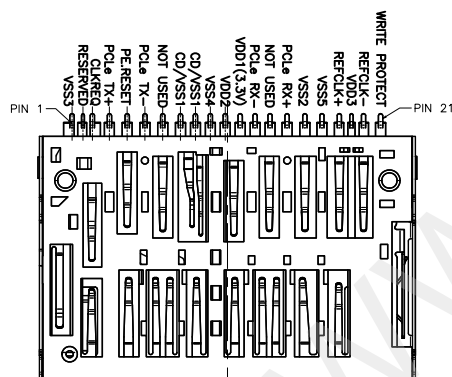

Notes:

1. All Dimensions are in Millimeters.
2. Operation voltage: 10 VAC max.
3. Current rating : 1 Amps max.
4. Contact resistance: 100m ohms max.
5. Insulation resistance: 1000M ohms min. 500 VDC
6. Dielectric withstanding voltage: 500 VAC / 1minute
7. Operating Temperature: -20°C to $+60^{\circ}\text{C}$
8. Storage Temperature: -40°C to $+70^{\circ}\text{C}$
9. Durability 10000 cycles.



深圳市华宇创精密电子有限公司

TOLERANCE: XX ± 0.30 XXX ± 0.25 XXX ± 0.15 X° $\pm 2^{\circ}$ X.X° $\pm 0.5^{\circ}$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SD 7.0 NO PUSH 短体DIP 板上型3.2H
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC107-SD21-320
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HVC-2509191643
			SHEET NO. 1 OF 1