
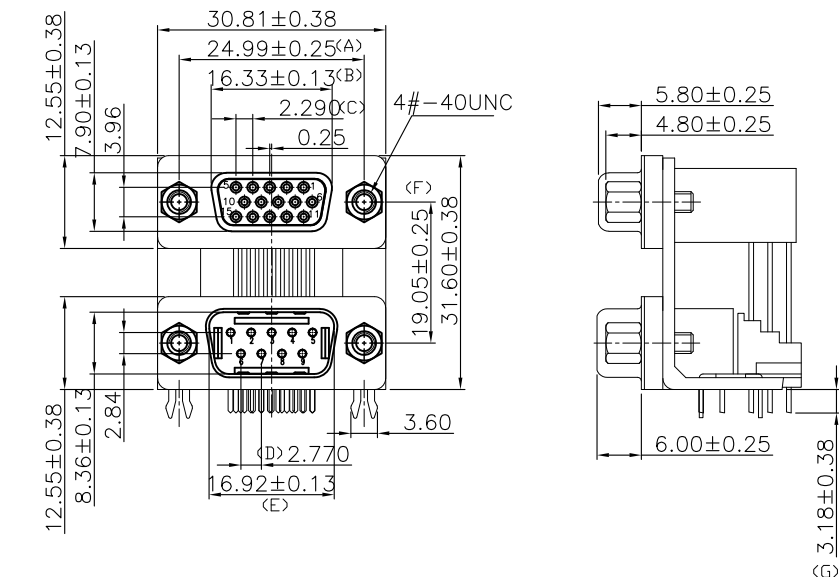


2" $\mathcal{L}$ P.C.B. EDGE

RECOMMENDED P.C.B. LAYOUT

INSPECTION DIMENSION:(A)~(M)

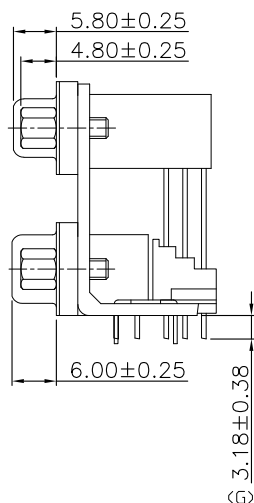

SPECIFICATIONS

1. D-SUB
 - 1.1 Voltage: 250 VAC(RMS) Max.
 - 1.2 Current Rating: 3 Ampere per Contact
 - 1.3 Contact Resistance: 25 Milliohms Max.
 - 1.4 Insulation Resistance: 5000 Megohms Min.
 - 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
 - 1.6 Total Mating Force: 4.0 Kgf Max.
 - 1.7 Total Unmating Force: 1.0 Kgf Min.
 - 1.8 Operating Temperature: -55°C to +85°C
2. VGA
 - 2.1 Voltage: 250 VAC(RMS) Max.
 - 2.2 Current Rating: 3 Ampere per Contact
 - 2.3 Contact Resistance: 25 Milliohms Max.
 - 2.4 Insulation Resistance: 5000 Megohms Min.
 - 2.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
 - 2.6 Total Mating Force: 6.0 Kgf Max.
 - 2.7 Total Unmating Force: 1.2 Kgf Min.
 - 2.8 Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:
Housing(UPPER):PBT, UL 94V-0, Color:Black.
Housing(LOWER):PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Bracket:Zinc Alloy.
Screw:Steel.
2. FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Bracket:Nickel Plated.
Screw:Nickel Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	HDR15母 对 DR9公 间距19.05	
X.XX ±0.25					
X.XXX ±0.15					
X: ±2" X.X ±0.5"		CHECKED BY:	DATE :	PART NO.	HYC228-VGA24C-195
		马跃	2014-02-23	MOLD NO.	
UNIT: mm [inch]				APPROVED BY:	DATE :
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1