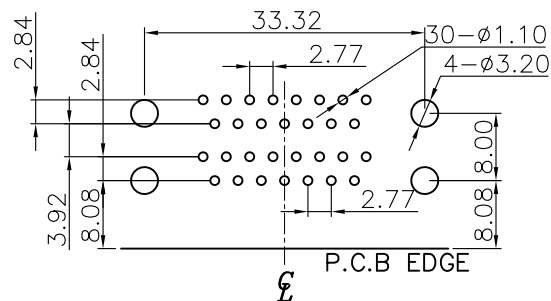
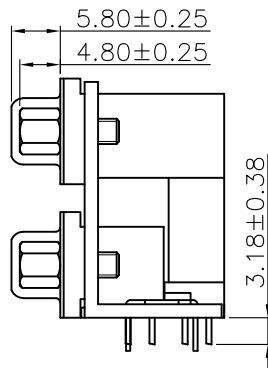
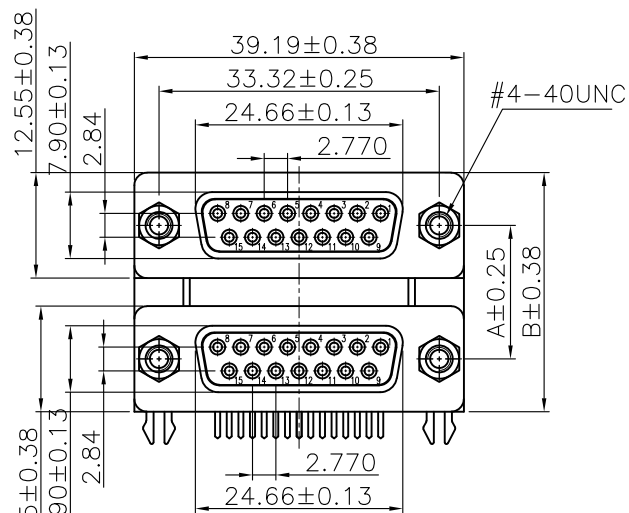


RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION: (A)~(M)

DIMA	DIMB
15.88	28.43
19.05	31.60

SPECIFICATIONS

- D-SUB
 - Voltage: 250 VAC(RMS) Max.
 - Current Rating: 3 Ampere per Contact
 - Contact Resistance: 25 Milliohms Max.
 - Insulation Resistance: 5000 Megohms Min.
 - Dielectric Withstanding Voltage: 1000V AC(RMS)
 - Total Mating Force: 9.4 Kgf Max.
 - Total Unmating Force: 1.4 Kgf Min.
 - Operating Temperature: -55°C to +85°C

NOTES

- MATERIAL:
 - Housing:PBT, UL 94V-0, Color:Black.
 - Terminal:Copper Alloy.
 - Shell:SPCC.
 - Boardlock:Copper Alloy.
 - Bracket:Zinc Alloy.
 - Screw:Copper Alloy.
- FINISH:
 - Terminal:Gold Plated over Nickel at Contact Area.
 - Tin Plated over Nickel at Solder Ared.
 - Shell:Tin Plated.
 - Boardlock:Tin Plated.
 - Bracket:Nickel Plated.
 - Screw:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DR15母 对 DR15母 铆锁
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC244-VGA30B-XXX
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
	UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAW NO: HYC-2510100951	SHEET NO. 1 OF 1