
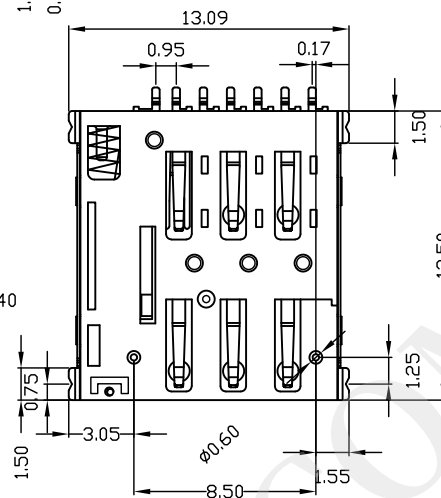
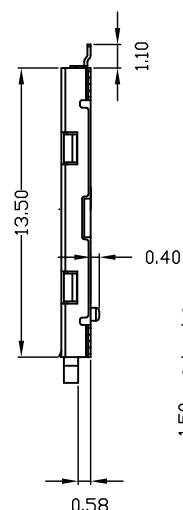
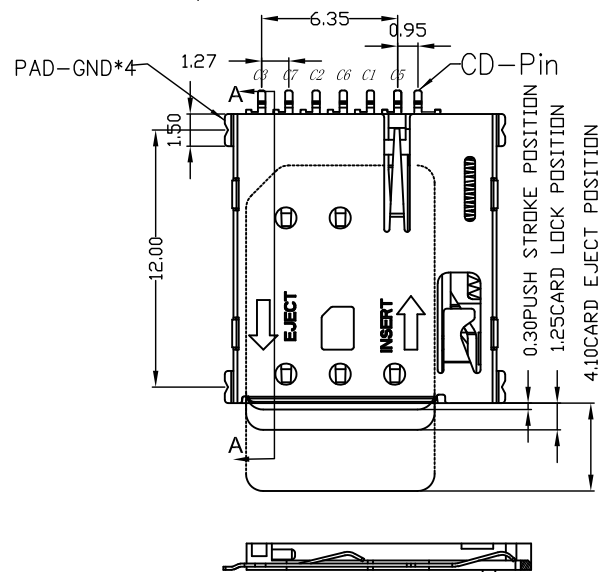

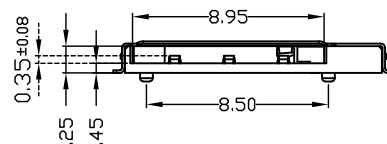
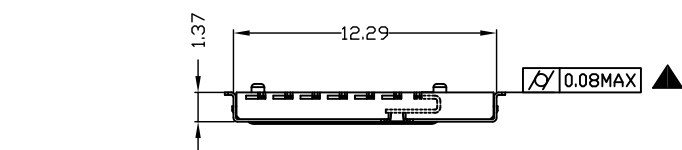


SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出

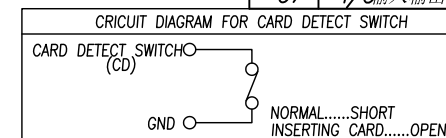

Specification

MATERIAL:




Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: Copper Alloy
SHELL: SUS

PLATING:

Contact: Plated 50u'' Ni, Over All AU GOLD 1U
Shell: Plated 50u'' Ni Over All, PAD Au 1U

Electrical:

Current Rating :0.5Amps max.
Voltage Rating :125V AC/DC
Ambient Temperature Range :-20° C~+60° C
Storage Temperature Range :-40° C~+70° C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:100m Ω max.
Insulation Resistance:1000M Ω min./500V
Mating Cycles:3000 Insertions
产品耐温温度: 260度

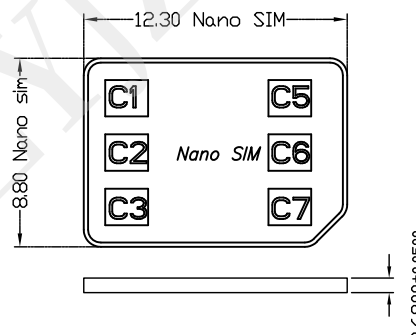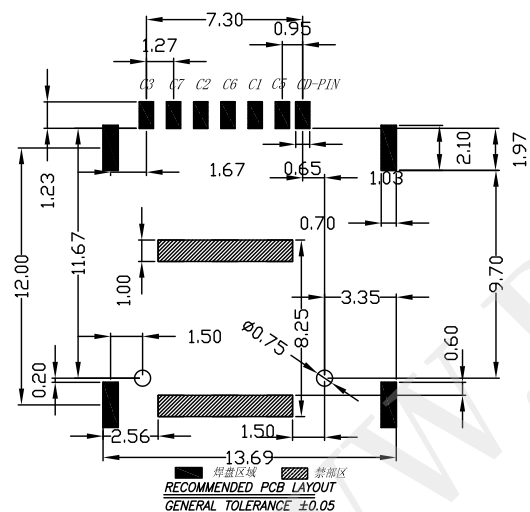

深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	NANO SIM PUSH 1.37H 带CD PIN 带孔	
X.XX ±0.25					
X.XXX ±0.15					
X: ±2° X.X: ±0.5°		CHECKED BY:	DATE :	PART NO.	HYC63-SIM07-137
		马跃	2014-02-23	MOLD NO.	
UNIT: mm [inch]				APPROVED BY:	DATE :
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1