




序号	品名	材质
①	0.5掀盖卧式带扣胶芯 (H=2.0)	LCP UL94V-0 本色
②	0.5掀盖卧式带扣后盖 (H=2.0)	LCP UL94V-0 黑色
③	0.5掀盖卧式带扣端子 (H=2.0)	铜合金/表面镀金
④	0.5掀盖卧式带扣焊片 (H=2.0)	铜合金/表面镀铜

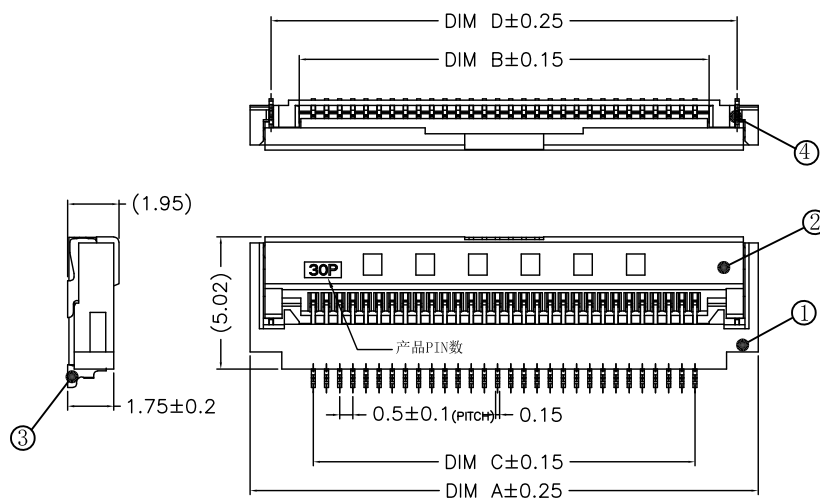


技术指标:


1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ 。
3. 额定电流: 0.5A
4. 额定电压: 50V, AC.
5. 接触电阻: 50m Ω MAX.
6. 绝缘电阻: 500M Ω Min.
7. 耐电压: 150V AC/1Minute



CKT	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	CKT	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
5	6.80	3.07	2.40	5.20	4.60	4.60	43	25.80	22.07	21.00	24.20	23.60	23.60
6	7.30	3.57	2.90	5.70	5.10	5.10	44	26.30	22.57	21.50	24.70	24.10	24.10
7	7.80	4.07	3.40	6.20	5.60	5.60	45	26.80	23.07	22.00	25.20	24.60	24.60
8	8.30	4.57	3.90	6.70	6.10	6.10	46	27.30	23.57	22.50	25.70	25.0	25.10
9	8.80	5.07	4.40	7.20	6.60	6.60	47	27.80	24.07	23.00	26.20	25.60	25.60
10	9.30	5.57	4.90	7.70	7.10	7.10	48	28.30	24.57	23.50	26.70	26.10	26.10
11	9.80	6.07	5.40	8.20	7.60	7.60	49	28.80	25.07	24.00	27.20	26.60	26.60
12	10.30	6.57	5.90	8.70	8.10	8.10	50	29.30	25.57	24.50	27.70	27.10	27.10
13	10.80	7.07	6.40	9.20	8.60	8.60	51	29.80	26.07	25.00	28.20	27.60	27.60
14	11.30	7.57	6.90	9.70	9.10	9.10	52	30.30	26.57	25.50	28.70	28.10	28.10
15	11.80	8.07	7.40	10.20	9.60	9.60	53	30.80	27.07	26.00	29.20	28.60	28.60
16	12.30	8.57	7.90	10.70	10.10	10.10	54	31.30	27.57	26.50	29.70	29.10	29.10
17	12.80	9.07	8.40	11.20	10.60	10.60	55	31.80	28.07	27.00	30.20	29.60	29.60
18	13.30	9.57	8.90	11.70	11.10	11.10	56	32.30	28.57	27.50	30.70	30.10	30.10
19	13.80	10.07	9.40	12.20	11.60	11.60	57	32.80	29.07	28.00	31.20	30.60	30.60
20	14.30	10.57	9.90	12.70	12.10	12.10	58	33.30	29.57	28.50	31.70	31.10	31.10
21	14.80	11.07	10.40	13.20	12.60	12.60	59	33.80	30.07	29.00	32.20	31.60	31.60
22	15.30	11.57	10.90	13.70	13.10	13.10	60	34.30	30.57	29.50	32.70	32.10	32.10
23	15.80	12.07	11.40	14.20	13.60	13.60	61	34.80	31.07	30.00	33.20	32.60	32.60
24	16.30	12.57	11.90	14.70	14.10	14.10	62	35.30	31.57	30.50	33.70	33.10	33.10
25	16.80	13.07	12.40	15.20	14.60	14.60	63	35.80	32.07	31.00	34.20	33.60	33.60
26	17.30	13.57	12.90	15.70	15.10	15.10	64	36.30	32.57	31.50	34.70	34.10	34.10
27	17.80	14.07	13.40	16.20	15.60	15.60	65	36.80	33.07	32.00	35.20	34.60	34.60
28	18.30	14.57	13.90	16.70	16.10	16.10	66	37.30	33.57	32.50	35.70	35.10	35.10
29	18.80	15.07	14.40	17.20	16.60	16.60	67	37.80	34.07	33.00	36.20	35.60	35.60
30	19.30	15.57	14.90	17.70	17.10	17.10	68	38.30	34.57	33.50	36.70	36.10	36.10
31	19.80	16.07	15.40	18.20	17.60	17.60	69	38.80	35.07	34.00	37.20	36.60	36.60
32	20.30	16.57	15.90	18.70	18.10	18.10	70	39.30	35.57	34.50	37.70	37.10	37.10
33	20.80	17.07	16.40	19.20	18.60	18.60	71	39.80	36.07	35.00	38.20	37.60	37.60
34	21.30	17.57	16.90	19.70	19.10	19.10	72	40.30	36.57	35.50	38.70	38.10	38.10
35	21.80	18.07	17.40	20.20	19.60	19.60	73	40.80	37.07	36.00	39.20	38.60	38.60
36	22.30	18.57	17.90	20.70	20.10	20.10	74	41.30	37.57	36.50	39.70	39.10	39.10
37	22.80	19.07	18.40	21.20	20.60	20.60	75	41.80	38.07	37.00	40.20	39.60	39.60
38	23.30	19.57	18.90	21.70	21.10	21.10	76	42.30	38.57	37.50	40.70	40.10	40.10
39	23.80	20.07	19.40	22.20	21.60	21.60	77	42.80	39.07	38.00	41.20	40.60	40.60
40	24.30	20.57	19.90	22.70	22.10	22.10	78	43.30	39.57	38.50	41.70	41.10	41.10
41	24.80	21.07	20.40	23.20	22.60	22.60	79	43.80	40.07	39.00	42.20	41.60	41.60
42	25.30	21.57	20.90	23.70	23.10	23.10	80	44.30	40.57	39.50	42.70	42.10	42.10

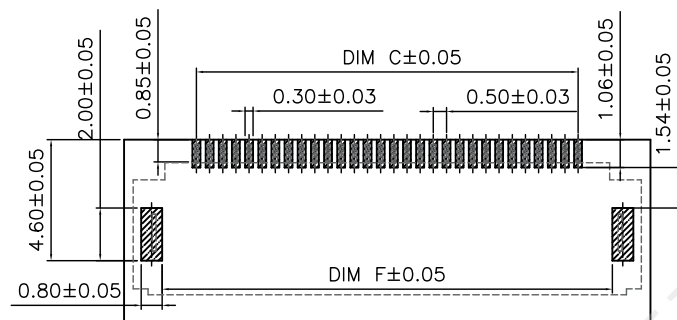

适用线路板 (PCB LAYOUT)

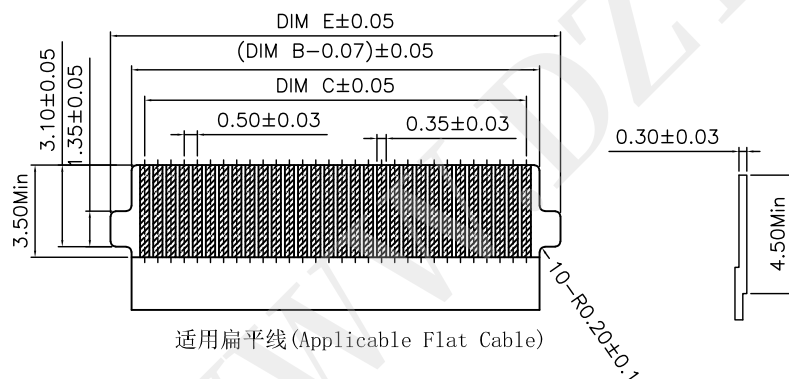

适用扁平线 (Applicable Flat Cable)

深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 0.5PH 2.0H 掀盖下接带扣
UNIT: mm [inch]	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC1H-05FPCXX-200
SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO. DRAW NO: HYC-2302271226
			SHEET NO. 1 OF 1