
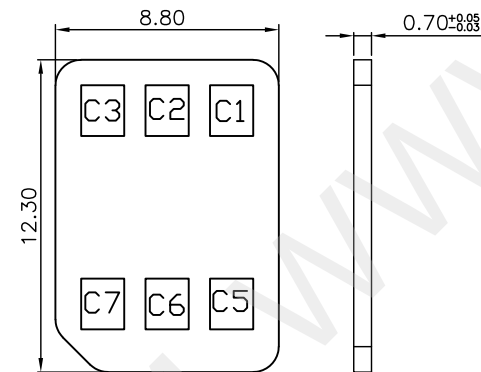


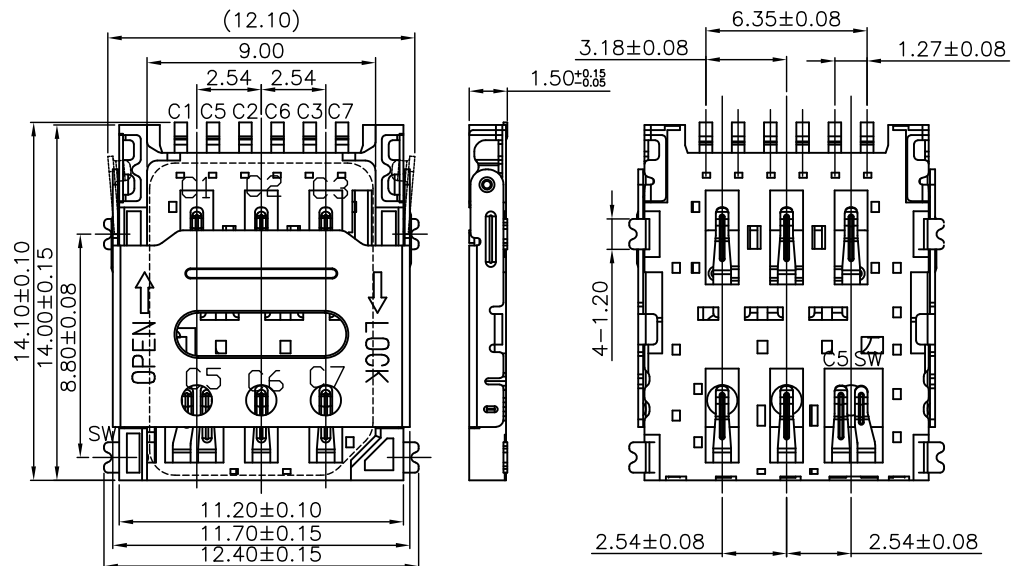

NANO SIM CARD

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

NOTES:

1) MATERIAL:

1-1 HOUSING:THERMOPLASTIC,UL 94V-0;COLOR:BLACK

1-2 SHIELDED:STAINLESS STEEL SUS304-3/4H

1-3 CONTACT:COPPER ALLOY C5191-EH

2) FINISH:

2-1 CONTACT: Au PLATING ON CONTACT AREA

(SEE P/N DESCRIPTION)

50 μ " MIN NICKEL UNDERPLATING OVER ALL1 μ " MIN Au PLATING ON SOLD AREA,

3) PRODUCT SPECIFICATIONS:

3-1 VOLTAGE RATING: 50V

3-2 WITHSTANDING VOLTAGE: AC250V R.M.S




3-3 CURRENT RATING: 0.5A

3-4 INSULATION RESISTANCE: 1000MEG.OHM MIN AT DC 250V


3-5 CONTACT RESISTANCE: 100 MILL.OHM MAX

3-6 OPERATION TEMPERATURE: -20° TO +85°


3-7 DURABILITY: 3000 CYCLES

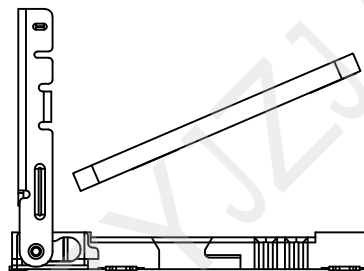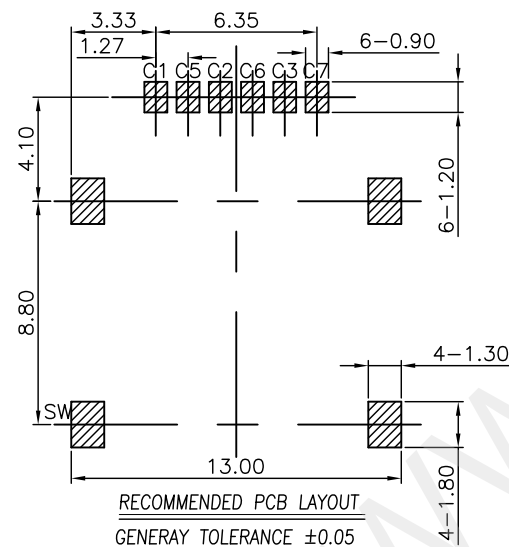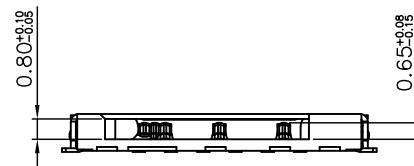

STEP 1 INSERT NANO-SIM CARD



STEP 2 PUSH THE SHELL






STEP 3 FINISH



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: NANO SIM 6P 掀盖 1.5H 带检测P
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC380-SIM07-150
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2510151127
			SHEET NO. 1 OF 1

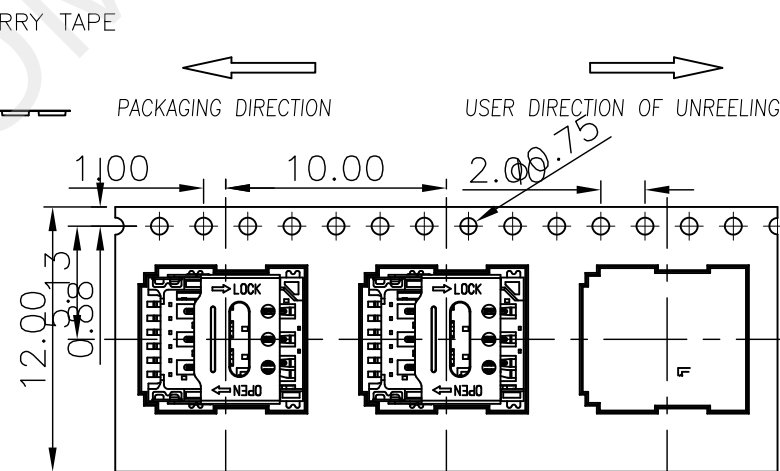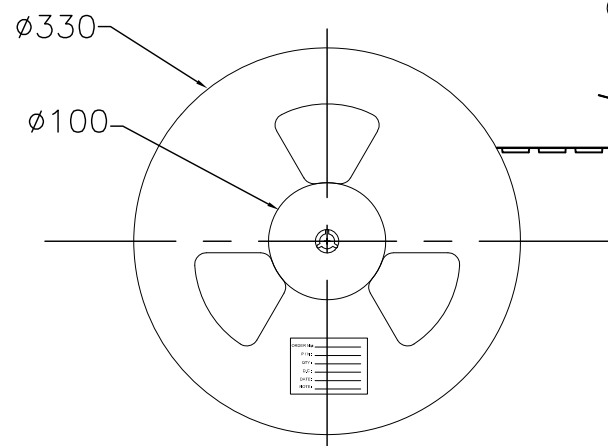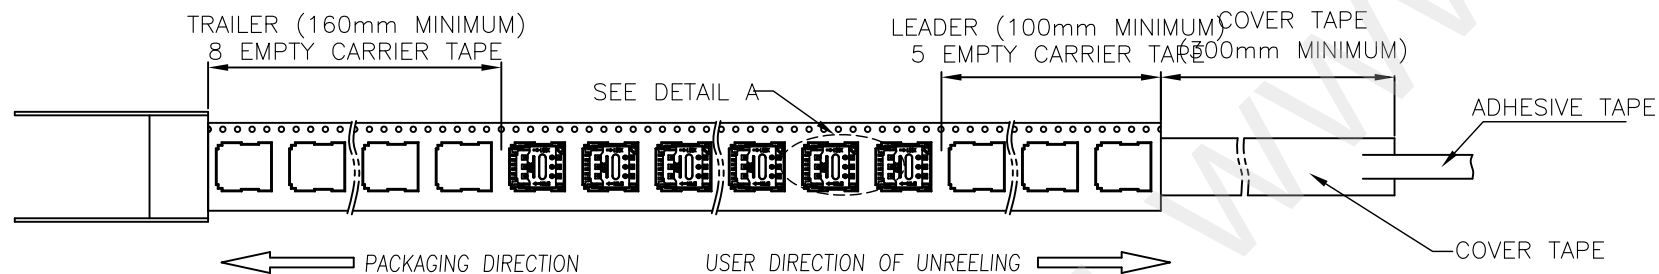

1	HYC380-SIM07-150	1500	11	10.0	16500	350X350X335
ITEM	PRODUCT NO.	Q'TY/REEL	REEL/CARTON	Kg/CARTON	Q'TY/CARTON	CARTON SIZE



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." $\pm 2^{\circ}$ X.X" $\pm 0.5^{\circ}$

UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY :

马跃

DATE :

2014-02-23

APPROVED BY :

邱敏

DATE :

2014-02-23

PART NAME:

包装图

PART NO.

MOLD NO.

DRAW NO:

SHEET NO.

1 OF 1