


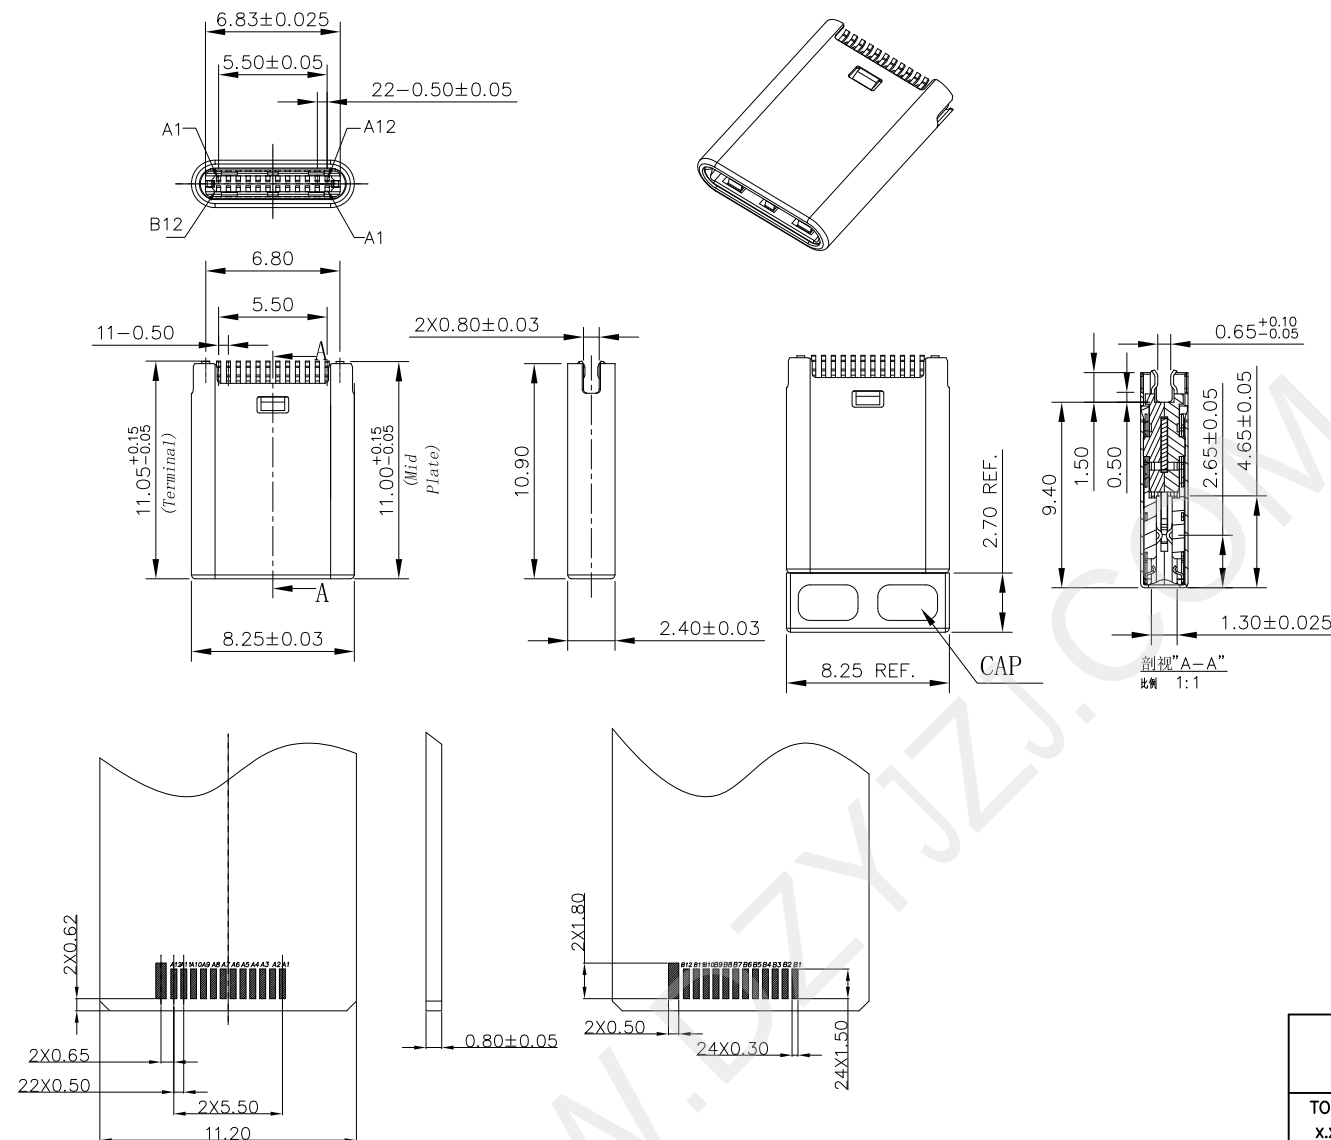

RECOMMENDED PCB LAYOUT($t=0.80\pm0.05$)
COMPONENT SIDE(GENERAL TOLERANCE: ±0.05)

技术要求:

1. 额定电流: 5AMP MAX (Pins A4, A9, B4, B9)
1.25AMP MAX (Pins B5, A1, B1, A12, B12)
0.25AMP Min(All pins)
2. 绝缘阻抗: 100M Ω Min
3. 接触阻抗: 40m Ω Max
4. 耐电压: 100V AC
5. 工作温度范围: -30 $^{\circ}$ C to +80 $^{\circ}$ C
6. 耐久: 10000 Cycles.
插入力: 5N~20N Max.
拔出力: 初始值: 8N~20N Max.
耐久后: 6N~20N Max.

Pin No.:

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC1	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	CC2			SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12



6	CAP	1	HIGH	BLACK
5	卡勾	2	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
4	SHELL	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
3	弹片	2	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
2	TERMINAL	24	COPPER ALLOY	MATING AREA: 30u" AU MIN; SOLDER TAIL: MATTE TIN 50 MIN, 50u" NICKEL OVERALL.
1	HOUSING	1	HIGH	BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X" ±2 " X.X" ±0.5 "	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 公座24P 夹板	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC618-USBC24-080
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-2510271517
SCALE: 1:1	SIZE: A4		SHEET NO.	1 OF 1

Use Direction

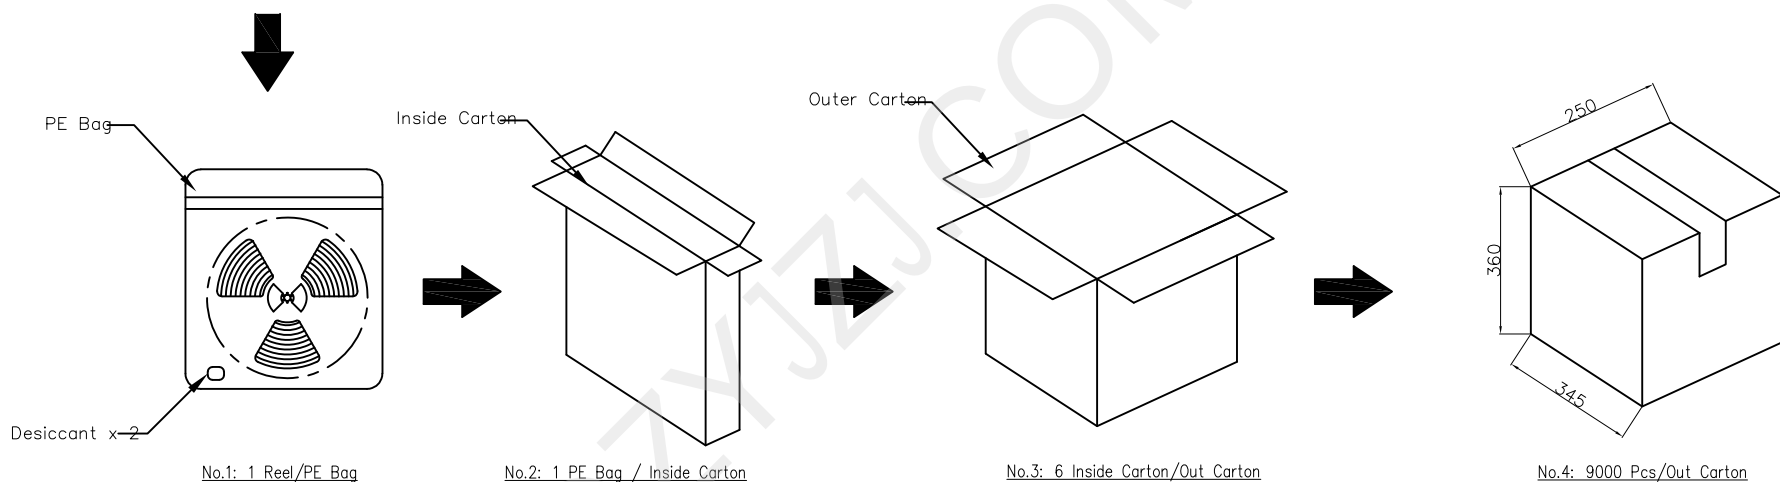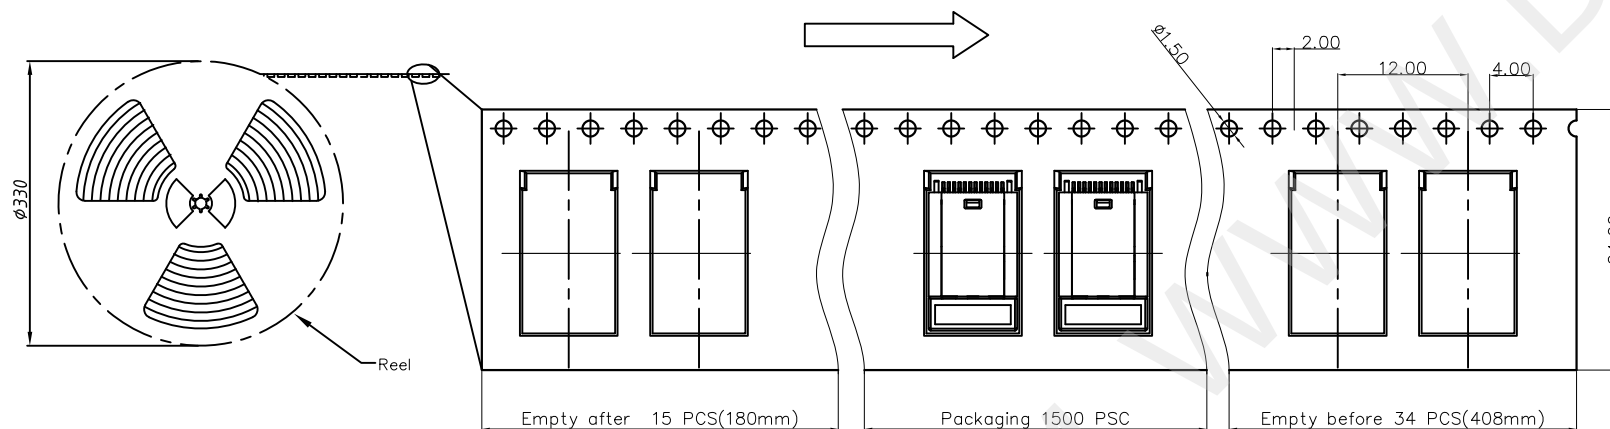

Packing quantity:

6(9000PCS)	1	1500
Inside Carton/Outer Carton	Reel/Inside Carton	PCS/Reel



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
UNIT: mm [inch]	SCALE:1:1	SIZE: A4	SHEET NO.	1 OF 1