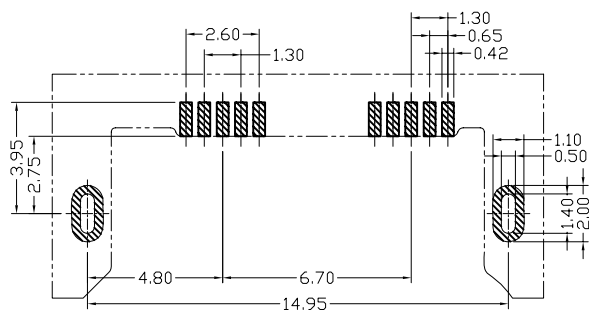

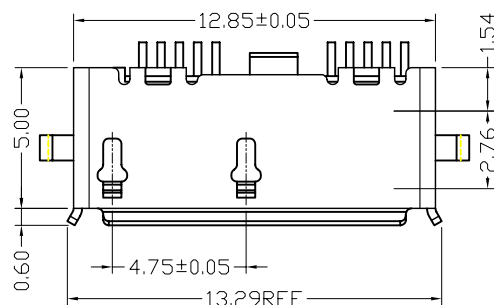
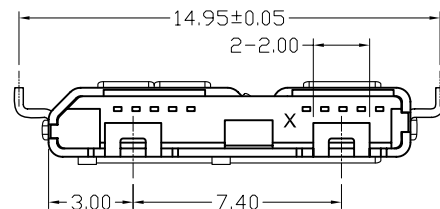


RECOMMEND PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCE ± 0.05 

NOTES:

1.MECHANICAL:

MATING FORCE: 35N MAX.

UNMATING FORCE: 10N MIN,INITIAL.

8~20N AFTER 10000 CYCLES.

DURABILITY: 5000 CYCLES MIN.

2.ELECTRICAL:

CURRENT: 1.0A

VOLTAGE: 30V MAX

WITHSTANDING VOLTAGE: 100V AC

CONTACT RESISTANCE: 30 mΩ MAX INITIAL;

40 mΩ MAX AFTER 10000 CYCLES

3.ENVIRONMENTAL

OPERATING TEMPERATURE RANGE $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$ 4. SALT SPRAY : 24 H AT 35%DC WITH
5%-SALT-SOLUTION CONCENTRATION.

5.PRODUCT SPEC:SP-MICRO USB-001


6.PACKAGE SPEC:DWG-PK MUB-0XX

7.PRODUCT MEET FOR ROHS STANDARD



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$ 

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :
陈一鸣DATE :
2014-02-23PART NAME:
MICRO USB 3.0 两脚沉板CHECKED BY:
马跃DATE :
2014-02-23

PART NO. HYC09-USBD10-075

APPROVED BY:
邱国夷DATE :
2014-02-23

DRAW NO: HYC-USB16070409

SHEET NO. 1 OF 1

The following part fittings of a machine

PART NO.	PART NAME	Q'TY	Material
	Housing	1	LCP 130i 黑色
	Terminal	10	C5191R-H,T=0.15mm:
	shell	1	SUS304-1/2H,T=0.30mm