
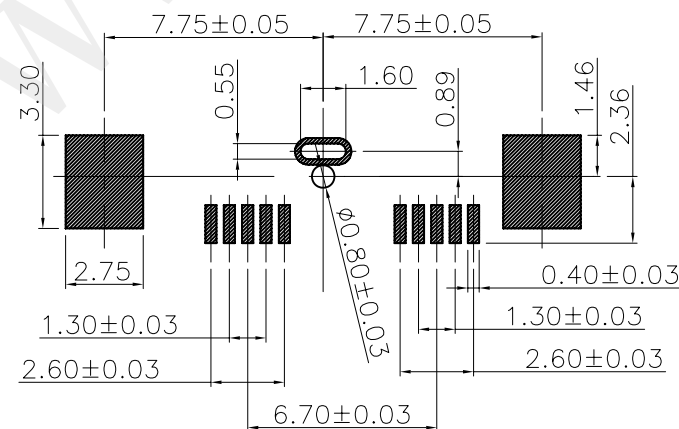
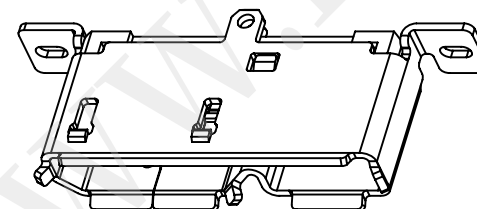
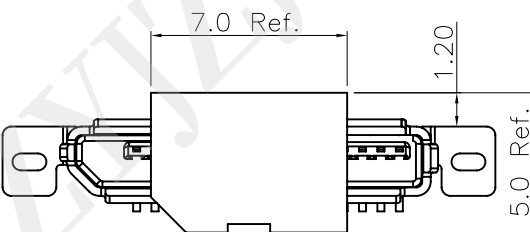

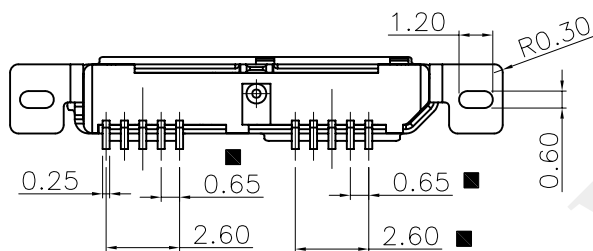
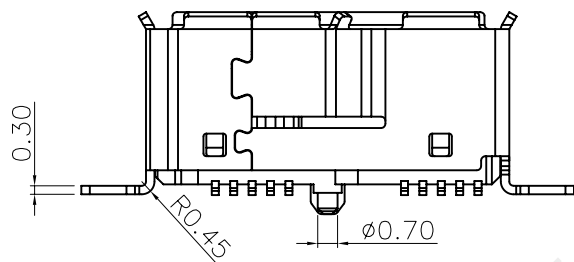
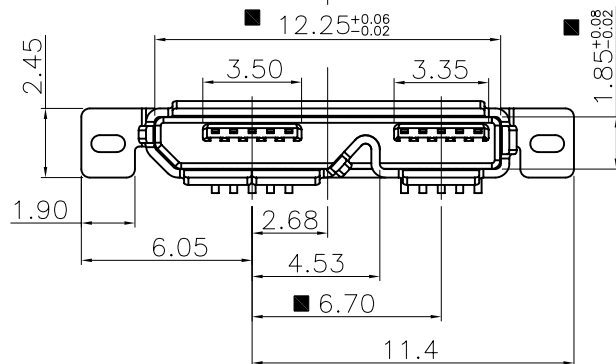


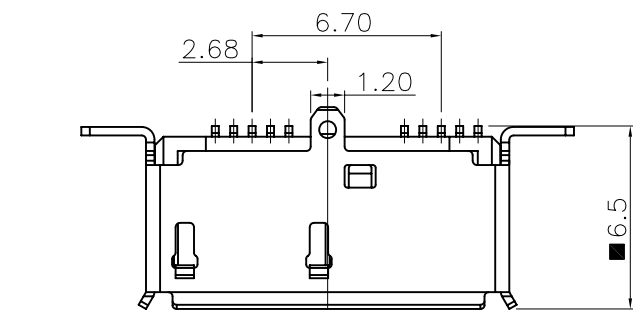

Notes:

1) Material:

Insulator : Thermoplastic G.F. UL94V-0

Contacts : Copper Alloy

Shell : Metal

2) Environmental :

-55°C to +105°C

3) Finish

Shell : 50u"min. Solderable Ni

Contacts : 1~30u" min. Gold on mating area.

100u" min. Tin on the tails.



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

MICRO USB 3.0 立式贴片

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NO.

HYC12-USBD10-065

MOLD NO.

DRAW NO:

HYC-USB18011519

SHEET NO.

1 OF 1