




备注:

1. 材质:
- 1.1 胶芯: LCP UL94V-0;
- 1.2 端子: C5191, T=0.15MM, 镍底 50μ ", 半金锡 1μ ";
- 1.3 外壳: SUS304, T=0.25MM, 镍底 50μ ", 镀零锡 80μ "以上;
2. 主要特性:
- 2.1 额定电流: 1.0A;
- 2.2 接触阻抗: $50m\Omega$ MAX;
- 2.3 绝缘阻抗: $100M\Omega$ MIN 100V DC;
- 2.4 耐压测试: 100V AC;
- 2.5 沾锡性: 温度 $235\pm 5^{\circ}\text{C}$, 时间 $5\pm 0.5\text{s}$;
- 2.6 整体插入力: 3.57kgf MAX 整体拔出力: 0.30kgf MIN;
- 2.7 使用寿命: 5000次;
- 2.8 耐温性: 烤箱测试: 温度 $250\pm 5^{\circ}\text{C}$, 时间2分钟;
- 2.9 工作环境: 温度: $-30^{\circ}\text{C}\sim +80^{\circ}\text{C}$; 湿度: 80% MAX;

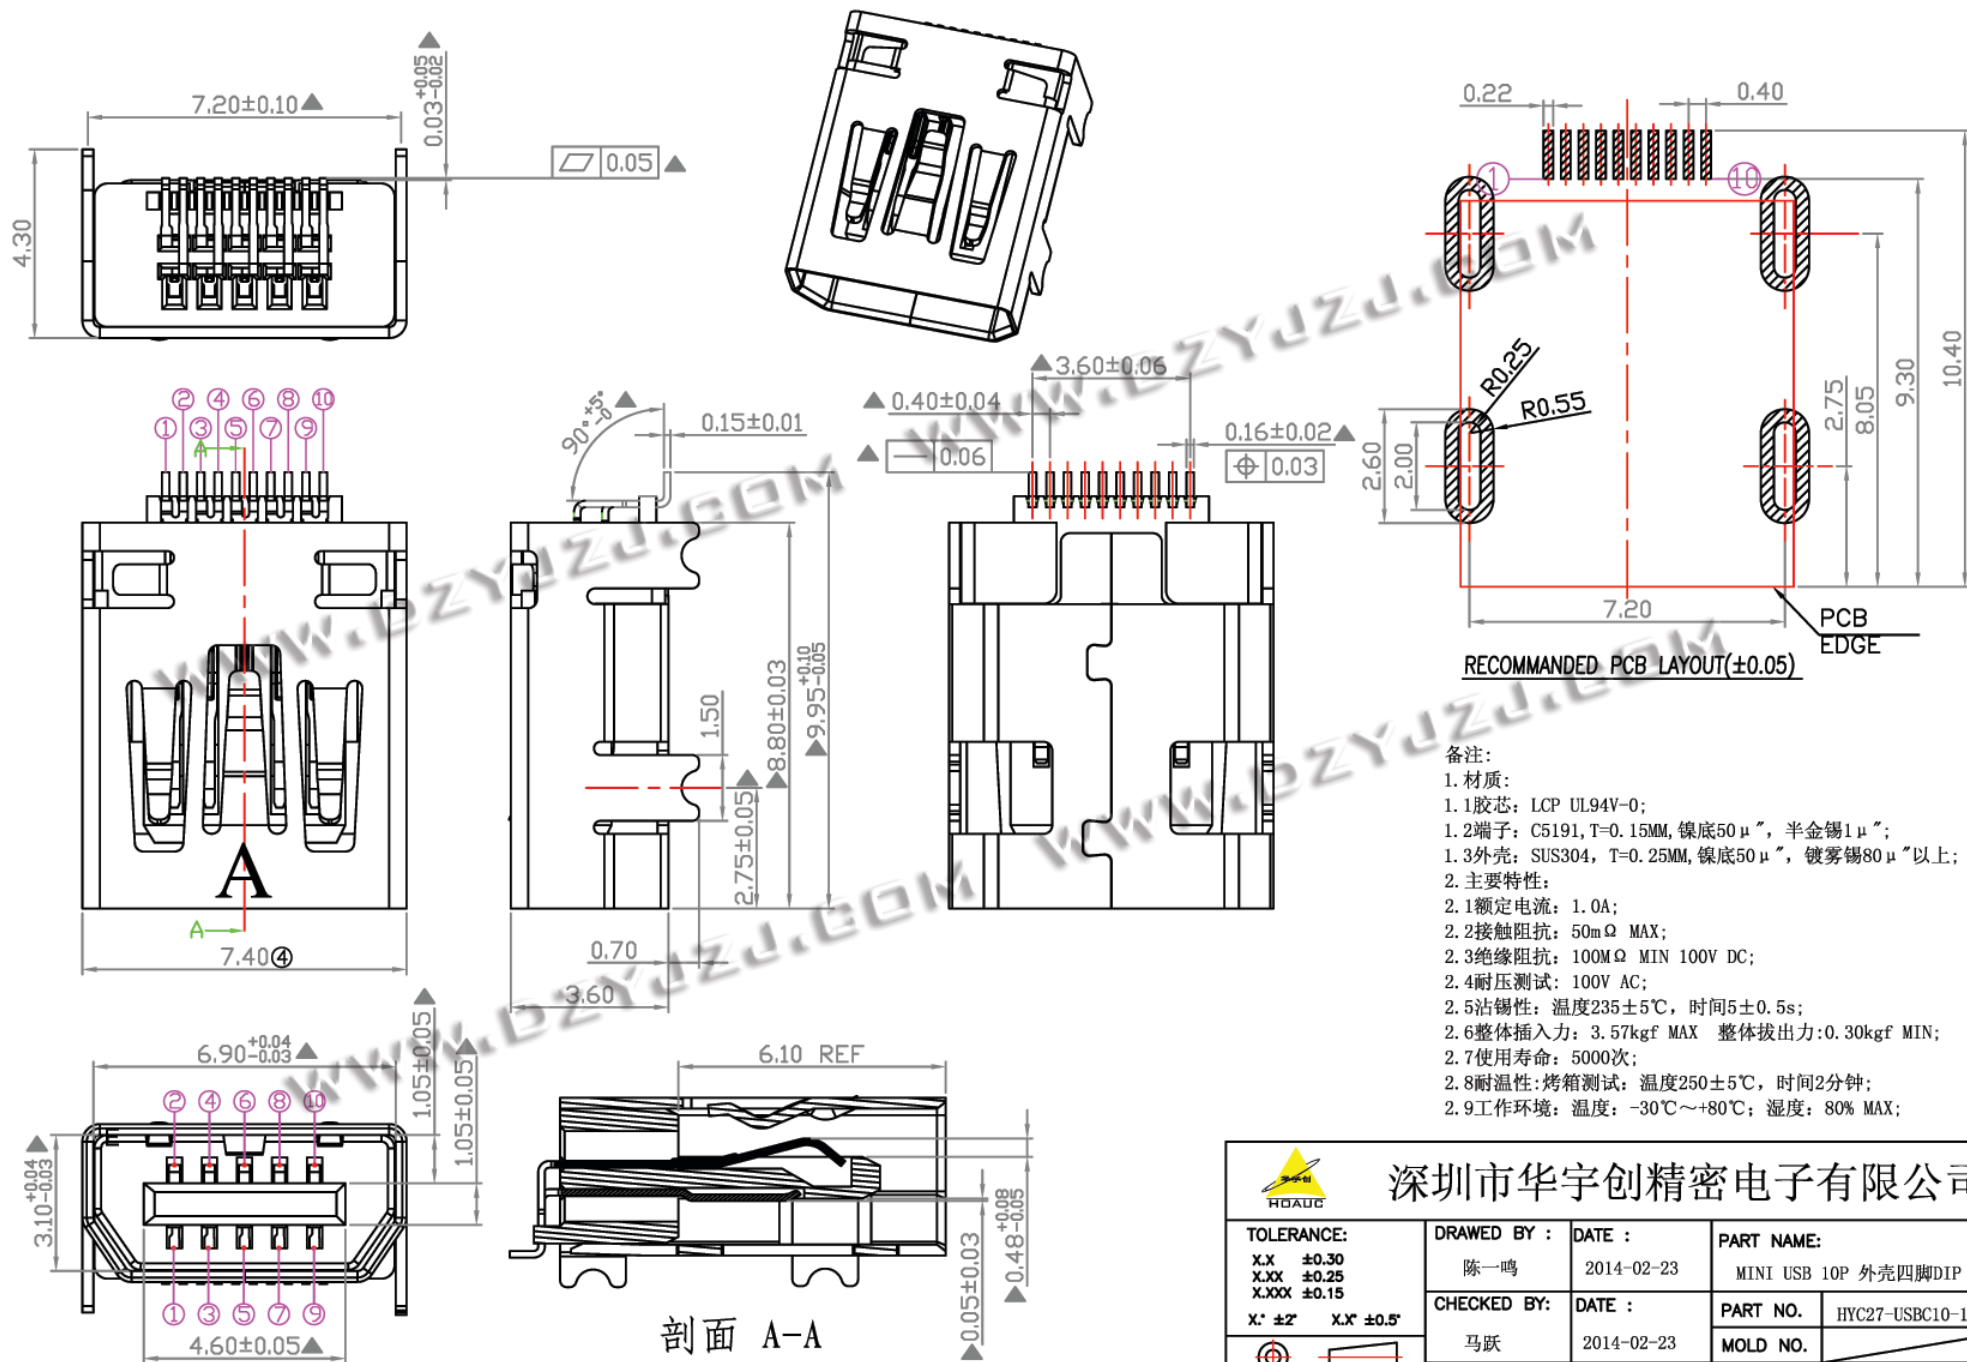

深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*				MINI USB 10P 外壳四脚DIP 端子SMT	
 		CHECKED BY:	DATE :	PART NO.	HYC27-USBC10-104
		马跃	2014-02-23	MOLD NO.	
UNIT: mm [inch]		APPROVED BY:	DATE :	DRAW NO:	HYC-USB16012016
SCALE:1:1	SIZE: A4	邱国夷	2014-02-23	SHEET NO.	1 OF 1