

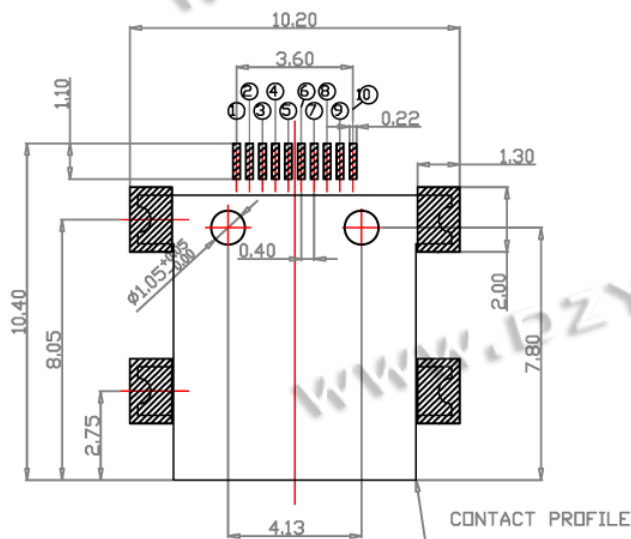
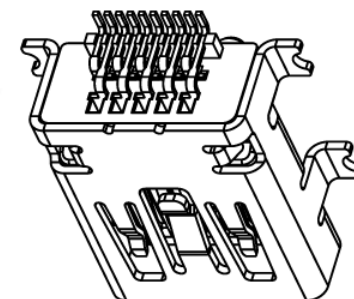
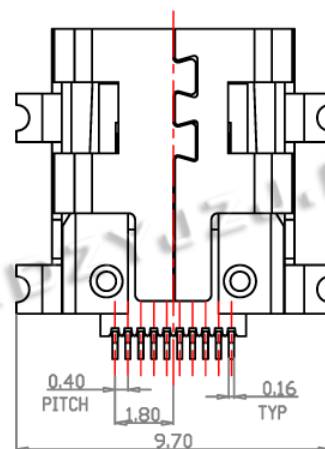
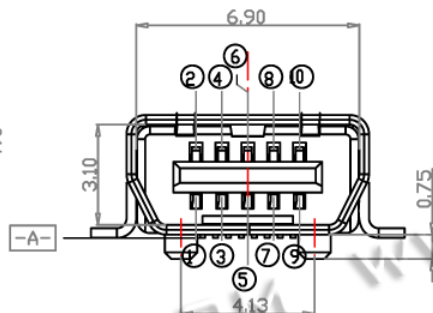


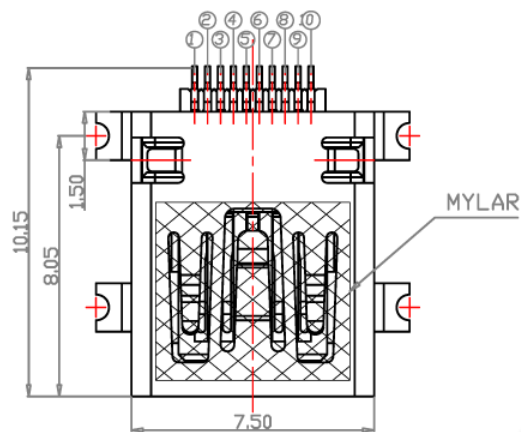

RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05

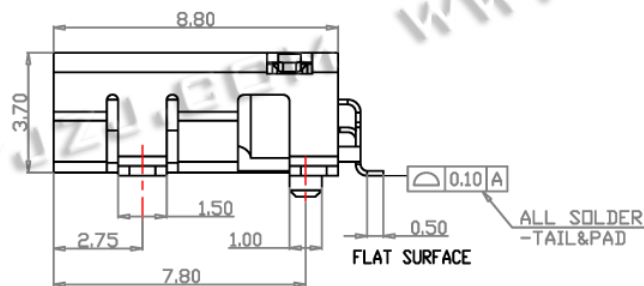

#### NOTE:

#### 1. ELECTRICAL CHARACTERISTICS

1-1. CONTACT RESISTANCE: 80 milliohms MAX.

1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.

1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN  
FOR 1 MINUTE.

#### 2. MECHANICAL CHARACTERISTICS

2-1. RETENTION FORCE:MIN.100gf/PIN



深圳市华宇创精密电子有限公司

|                                                                           |                     |                      |                                  |                  |
|---------------------------------------------------------------------------|---------------------|----------------------|----------------------------------|------------------|
| TOLERANCE:<br>X.X ±0.30<br>X.XX ±0.25<br>X.XXX ±0.15<br>X' ±2" X.X' ±0.5" | DRAWN BY :<br>陈一鸣   | DATE :<br>2014-02-23 | PART NAME:<br>MINI USB 10PIN SMT |                  |
|                                                                           | CHECKED BY:<br>马跃   | DATE :<br>2014-02-23 | PART NO.                         | HYC15-USBC10-102 |
| UNIT: mm [inch]<br>SCALE:1:1 SIZE: A4                                     | APPROVED BY:<br>邱国夷 | DATE :<br>2014-02-23 | DRAW NO:                         | HYC-USB14356387  |
|                                                                           |                     |                      | SHEET NO.                        | 1 OF 1           |