

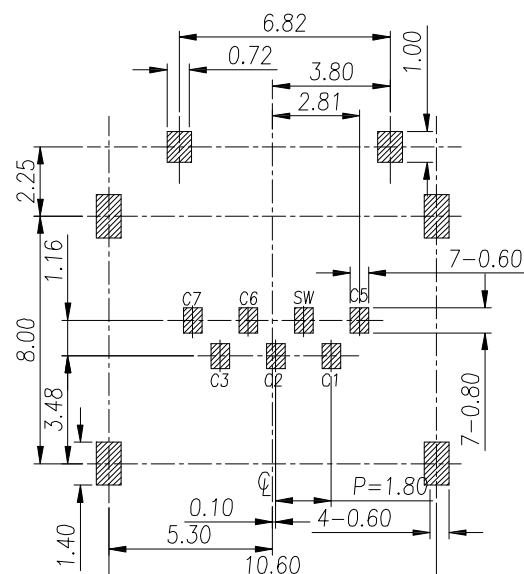


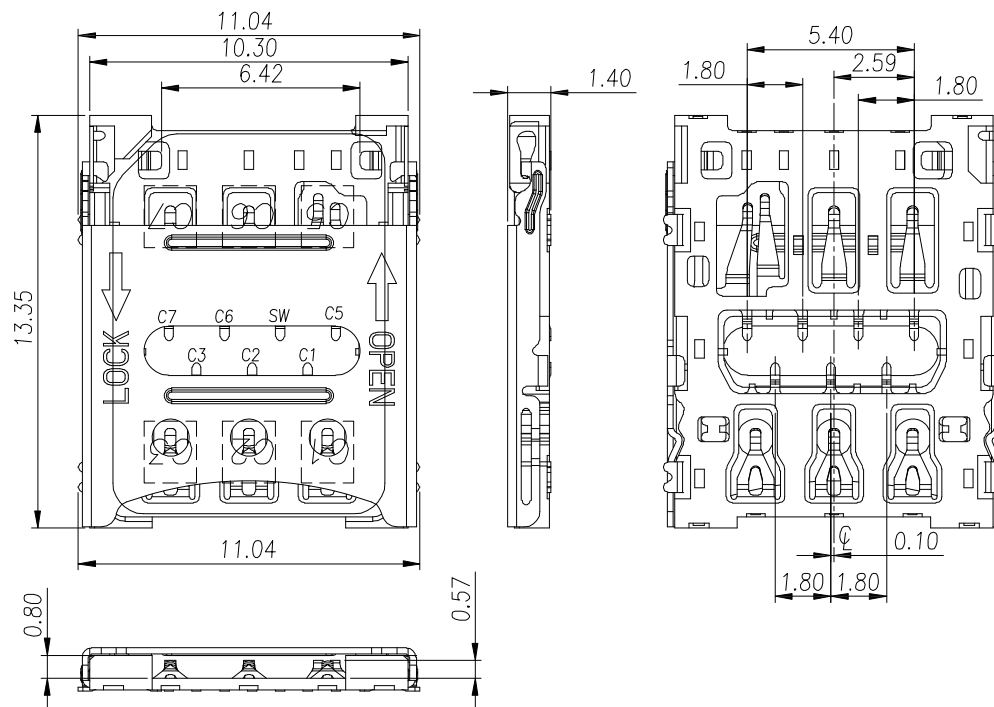

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

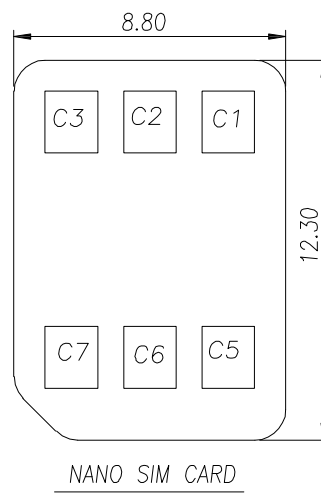

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

NOTES:

1) MATERIAL:

- 1-1 HOUSING: THERMOPLASTIC, UL 94V-0: COLOR: BLACK
- 1-2 SHIELDED: STAINLESS STEEL SUS304-3/4H
- 1-3 CONTACT: COPPER ALLOY C5191-EH

2) FINISH:

- 2-1 CONTACT: Au PLATING ON CONTACT AREA
(SEE P/N DESCRIPTION)
50u"MIN NICKEL UNDERPLATING OVER ALL
100u"MIN MATTE TIN PLATING ON SOLD AREA
- 2-2 SHIELDED: 1u"MIN Au PLATING ON SECURED AREA

3) PRODUCT SPECIFICATIONS:

- 3-1 VOLTAGE RATING: 50V
- 3-2 WITHSTANDING VOLTAGE: AC250V R.M.S
- 3-3 CURRENT RATING: 0.5A
- 3-4 INSULATION RESISTANCE: 1000MEG. OHM MIN AT DC 250V
- 3-5 CONTACT RESISTANCE: 100 MILL.OHM MAX
- 3-6 OPERATION TEMPERATURE: -20° TO +85°
- 3-7 DURABILITY: 3000 CYCLES



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." ± 2 " X.X" ± 0.5 "	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: NANO SIM 掀盖1.5H 带检测P
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC318-SIM07-150
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2207131926
			SHEET NO. 1 OF 1