

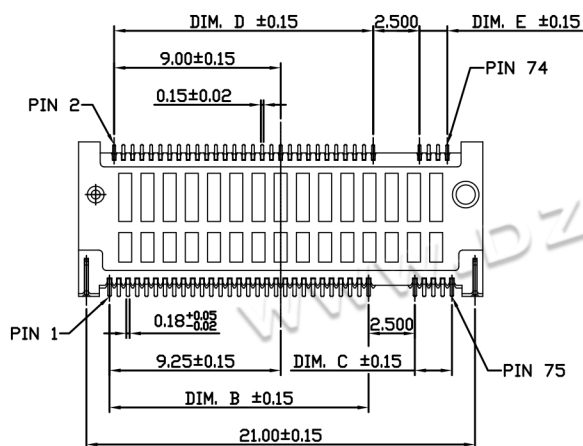
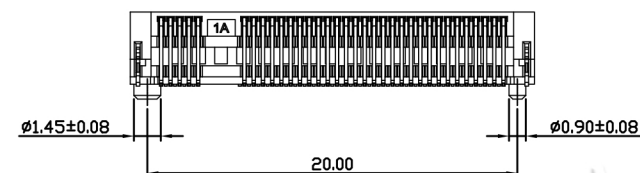

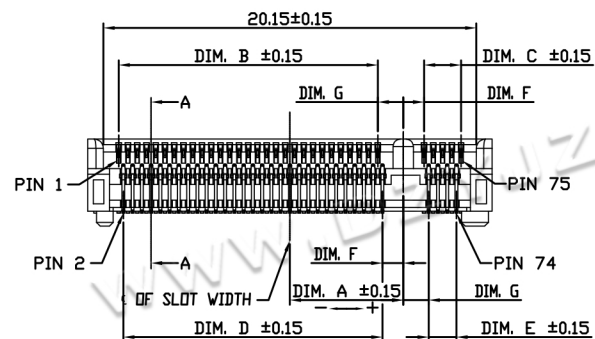

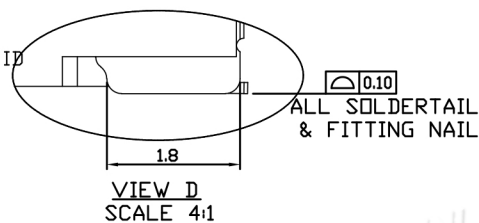


SECTION A-A

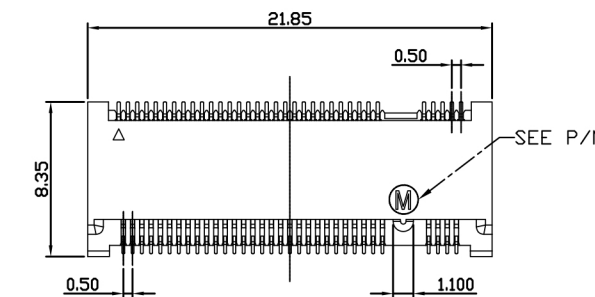

RECOMMENDED OPERATING FLOW:
MATE: 1
UNMATE: 2

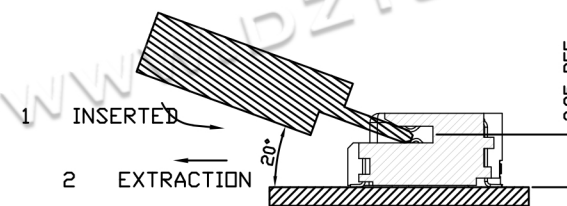


深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X' ±2' X.X' ±0.5'



UNIT: mm [inch]

SCALE: 1:1

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY :

马跃

DATE :

2014-02-23

APPROVED BY :

邱敏

DATE :

2014-02-23

PART NAME:

NGFF M.2 4.2H 0.5PH

PART NO.

HYC53X-05NGFF-420













MOLD NO.

DRAW NO:

HYC-2501131704

SHEET NO.

1 OF 1



NOTES:

1. MATERIAL :

1.1 HOUSING: THERMOPLASTIC, HIGH TEMPERATURE,
UL94 V-0, COLOR: BLACK.

1.2 CONTACT: COPPER ALLOY.

1.3 FITTING NAIL: COPPER ALLOY.

2. FINISH :

2.1 CONTACT

[SEE TABLE] GOLD PLATING ON THE CONTACT AREA.

GOLD FLASH PLATING ON THE SOLDERING AREA.

1.27um~2.54um [50u"~100u"] MIN. NICKEL UNDERPLATING OVERALL.

2.2 FITTING NAIL

2.54um~5.08um [100u"~200u"] MIN. MATTE-TIN PLATING ON THE SOLDERING AREA.

1.27um~2.54um [50u"~100u"] MIN. NICKEL UNDERPLATING OVERALL.

3. PACKAGING SPEC.: K-91302-401




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X." ±2" X.X" ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NAME:

NGFF M. 2 4. 2H 0. 5PH

PART NO.

HYC53X-05NGFF-420

MOLD NO.

DRAW NO:

HYC-2501131704

SHEET NO.

1 OF 1

TOLERANCE:
X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X.* ±2* X.X* ±0.5*

UNIT: mm [inch]

SCALE: 1:1 SIZE: A

PART NAME:	
------------	--

PART NAME: NCEE M. 3. 4. CH. 3. 5B1


	NGFF	M. 2	4. 2H	0. 5PH

PART NO.	HYC53X-05NGFF-420
----------	-------------------

MOLD NO.	
----------	--

DRAW NO:	HYC-2501131704
----------	----------------

SHEET NO.	1 OF 1
-----------	--------

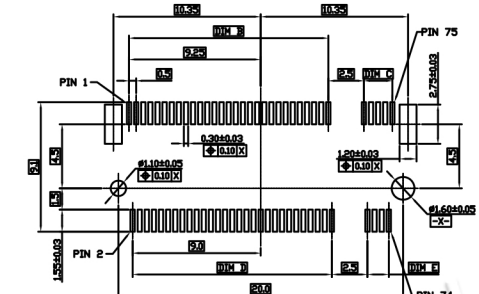

1.125	1.375	9.5	6.0	9.5	6.5	-1.625	F
1.125	1.375	10.5	5.0	10.5	5.5	-2.625	E
1.125	1.375	11.5	4.0	11.5	4.5	-3.625	D
1.125	1.375	12.5	3.0	12.5	3.5	-4.625	C
1.125	1.375	13.5	2.0	13.5	2.5	-5.625	B
1.125	1.375	14.5	1.0	14.5	1.5	-6.625	A
DIM. G	DIM. F	DIM. E	DIM. D	DIM. C	DIM. B	DIM. A	KEY ID