


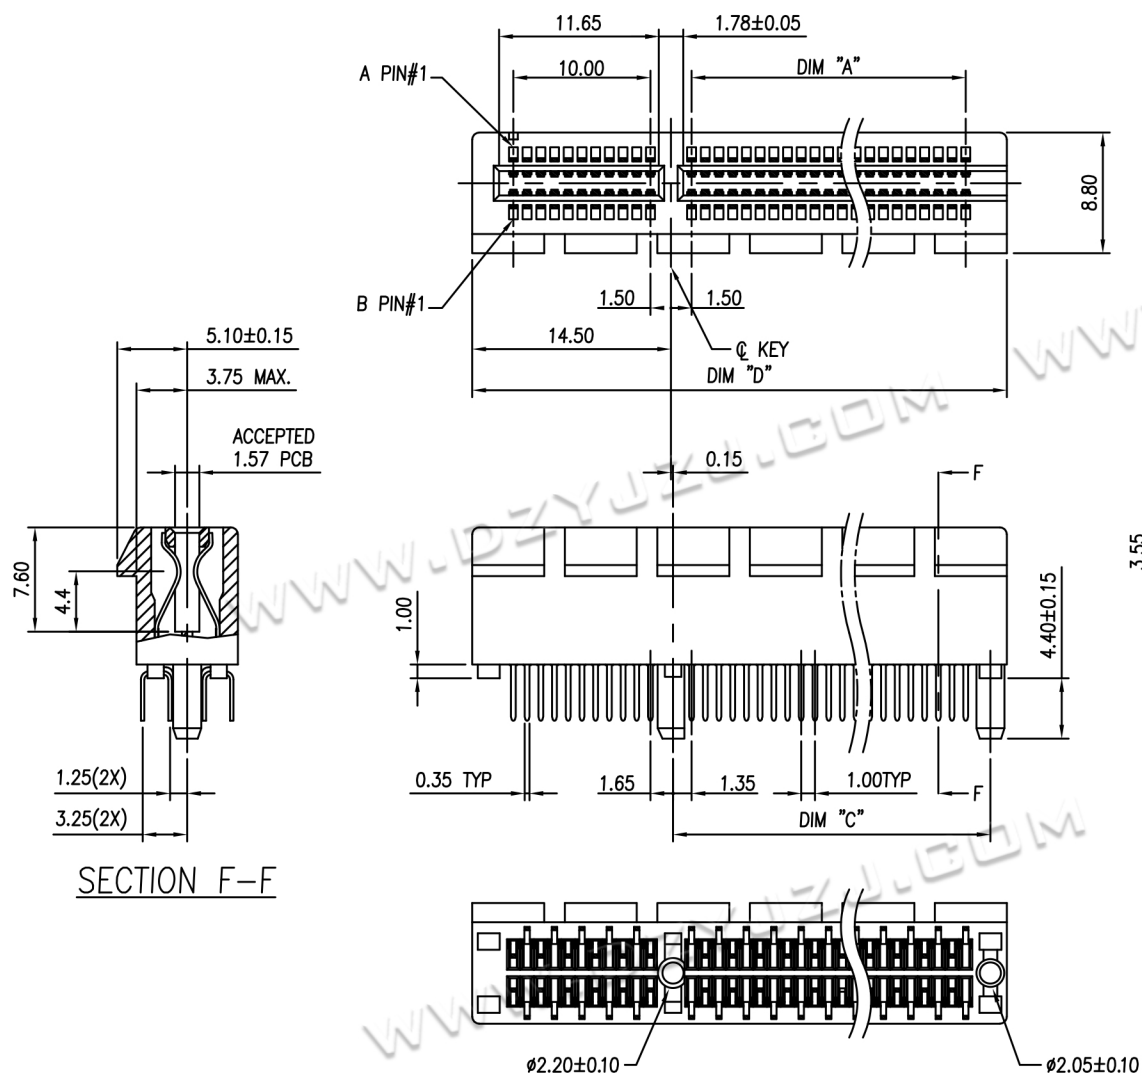

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,
UL94V-0;
COLOR: SEE PART NO..

1.2 CONTACTS: COPPER ALLOY.

2. FINISH:

2.1 CONTACT:

SELECTIVE GOLD PLATING ON CONTACT AREA.
100μ" MIN. MATTE TIN PLATING ON SOLDER TAILS,
50μ" MIN. NICKEL UNDERPLATING OVERALL.

3. PRODUCT SPEC.: PS-3GIO-01

4. PACKING SPEC.: 318304001

5. DATE CODE: YYWWDD

YY: YEAR (13: 2013)

WW: WEEK (25: THE 25TH WEEK)

D: (1~7: SUNDAY~SATURDAY)




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X' ±2° X.X' ±0.5°



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NAME:

PCI EXPRESS 3.0 DIP TYPE 开槽式双塑柱

PART NO.

HYC38-PC1XX-100-XX


MOLD NO.

DRAW NO:


HYC-2406281531

SHEET NO.

1 OF 1

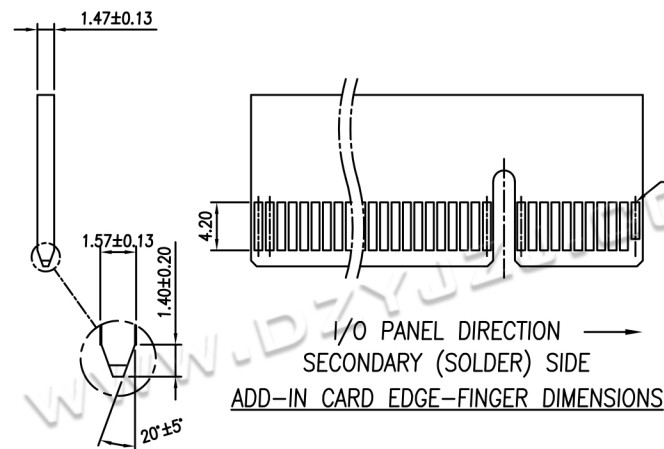


DIMENSIONS				
POSITION	A	C	F ± 0.20	G
36	6	9.15	8.15	B PIN#17
64	20	23.15	22.15	B PIN#3
98	37	40.15	39.15	B PIN#46
164	70	73.15	72.15	B PIN#8

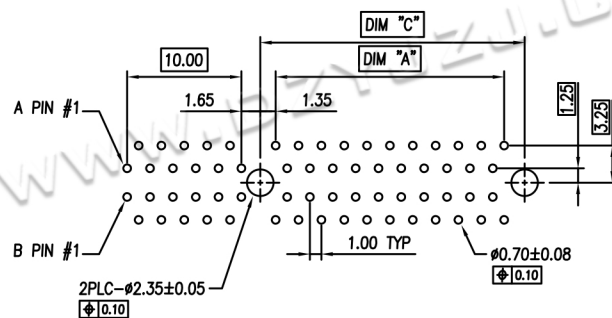

RECOMMENDED PCB LAYOUT
DUAL POST TYPE TYPE

TOLERANCE: ± 0.05

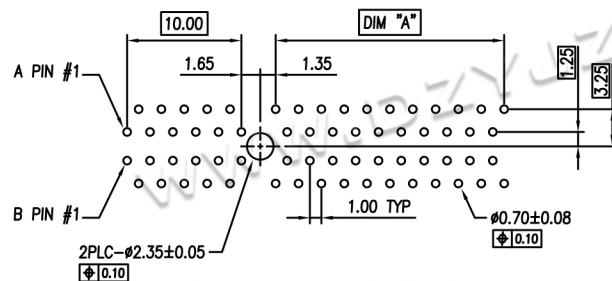

RECOMMENDED PCB LAYOUT
SINGLE POST TYPE

TOLERANCE: ± 0.05

