
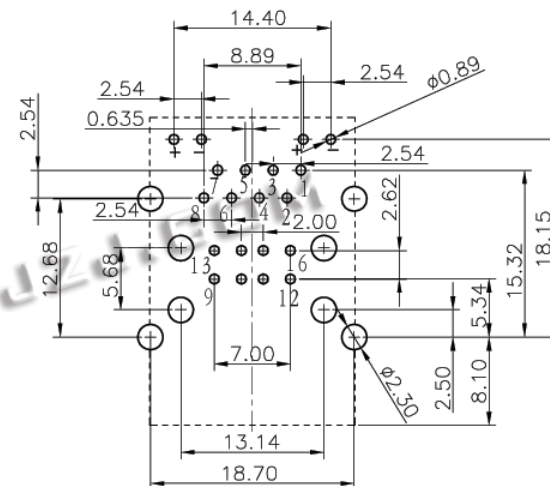

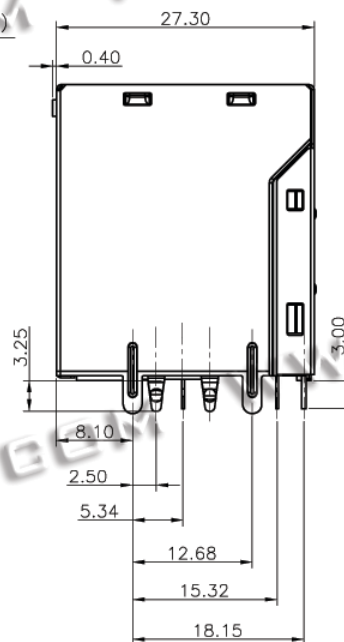
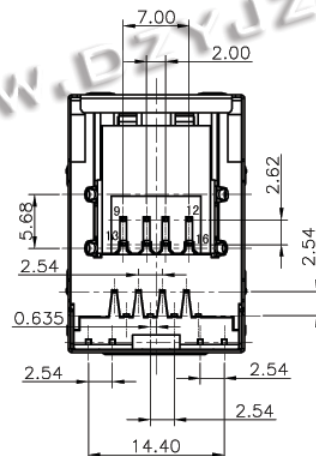


SECTION A-A

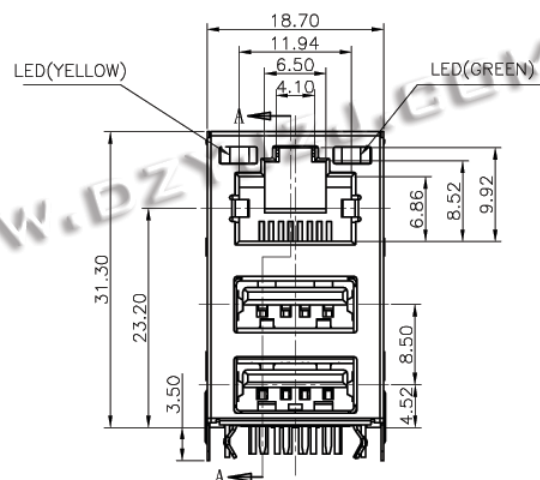

PCB LAYOUT

Material

Contact:

RJ Contact :T=0.25mm

Phosphor Bronze Gold FU"

USB Contact:T=0.25mm C2680-H

Gold FU"

Plating Over Nickel

Shielded:


Front shell:SPCC T=0.25mm

Back shell:SPCC T=0.25mm

HOUSING: PBT + 30%G.F., BLACK,
UL94V-0



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$  UNIT: mm [inch] SCALE: 1:1 SIZE: A4	DRAWN BY :	DATE :	PART NAME:
	陈一鸣	2014-02-23	RJ45带双层USB 带屏带灯
	CHECKED BY:	DATE :	PART NO. HYC47-RJ45-313
	马跃	2014-02-23	MOLD NO.
	APPROVED BY:	DATE :	DRAW NO: HYC-RJ16011409
	邱国夷	2014-02-23	SHEET NO. 1 OF 1