
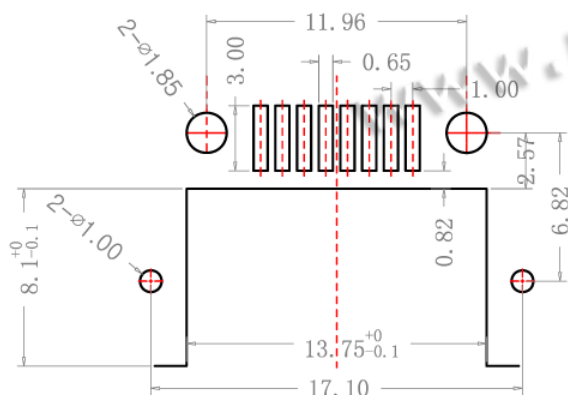
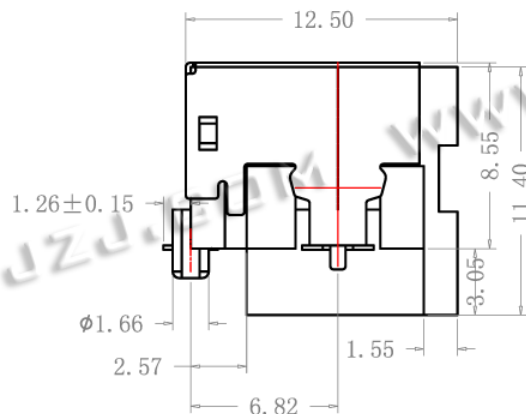
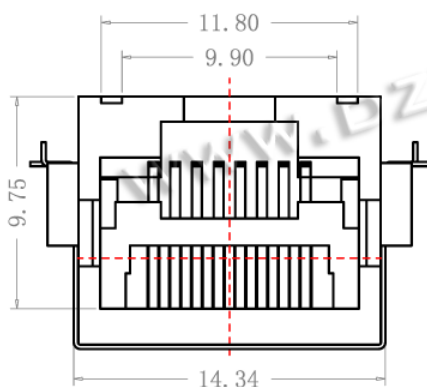
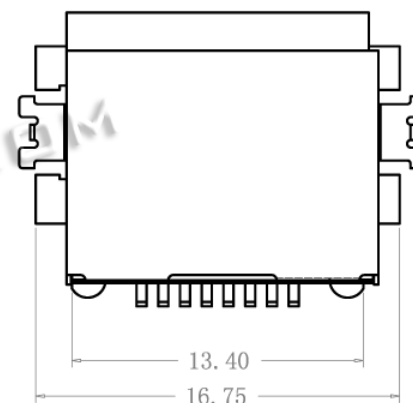
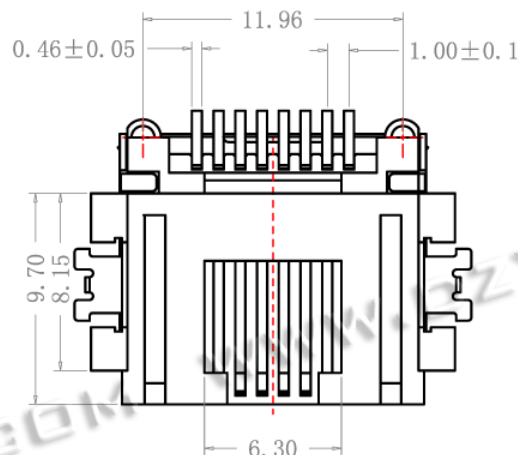


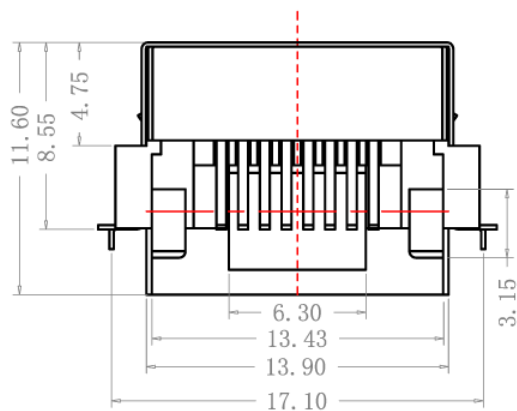

PCB LAYOUT

NOTES:

1.MATERIAL:

HOUSING: LCP WITH 30% G/F UL94V-0

COLOR:BLACK

CONTACT: PHOSPHOR BRONZE C5210

R-H. T=0.30mm.

SHIELD :BRASS C2680-H.

THICKNESS=0.20mm.

2.ELECTRICAL:

CONTACT RESISTANCE: 30~40 MILLIOHMS

DIELECTRIC WITHSTANDING VOLTAGE:500VAC

CURRENT RATING: 500MILI AMPERES DC

VOLAGE RATING: 500V AC

3.ENVIRONMENTAL:

OPERATING TEMPERATURE: -55°C TO +85°C



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: RJ45沉板上8.6 (带屏蔽壳)	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HXC14-RJ45-086	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HXC-RJ132054862	SHEET NO. 1 OF 1