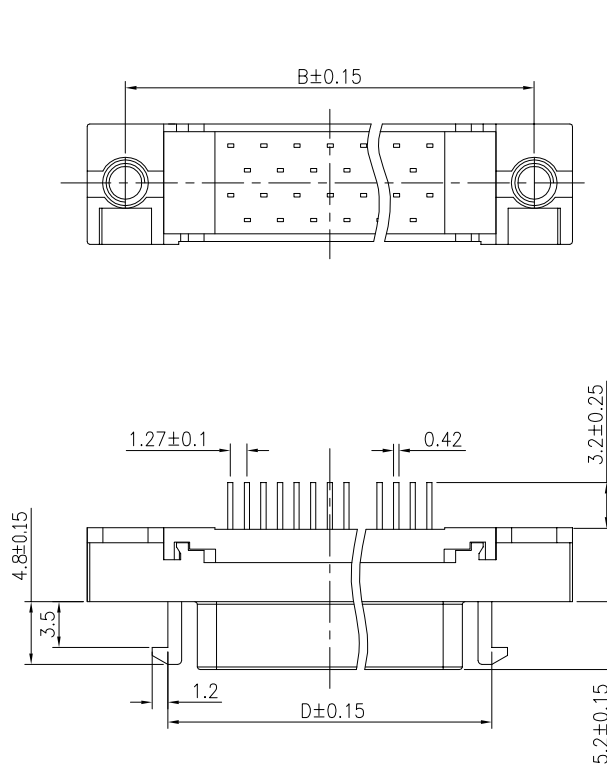
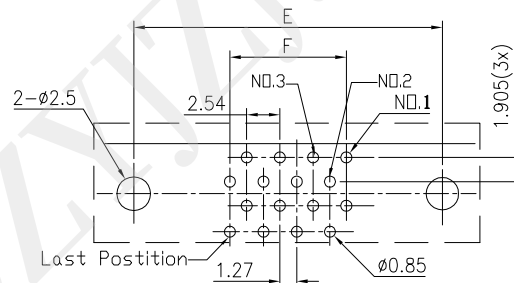
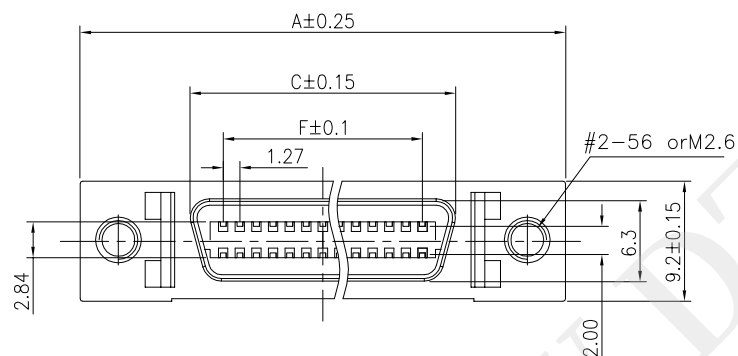
PCB Layout
(14,26,50 Pos)PCB Layout
(20,36,40,68,100 Pos)

No. of Pin	DIMENSIONS					
	A	B	C	D	E	F
14	29.51	23.64	12.6	17.25	23.64	7.62
20	33.32	27.45	16.43	21.06	27.45	11.43
26	37.13	31.26	20.24	24.76	31.26	15.24
36	43.48	37.61	26.5	31.11	37.61	21.59
40	46.08	40.15	29.14	33.30	40.15	24.13
50	52.37	46.5	35.39	40.0	46.5	30.48
68	64.00	57.92	46.90	51.00	57.92	41.91
100	84.18	78.23	67.14	71.50	78.23	62.23

SPECIFICATIONS

Housing: Thermoplastic, UL94V-0

Color: Black

Contact: Copper Alloy

Shell: Zinc Alloy

Voltage Current Rating: 1.0AMP, 250V AC

Insulation Resistance: 500M Ω Min.Contact Resistance: 30m Ω Max.

Dielectric Withstanding Voltage: 500V AC

Temperature Range: -40° C to +105° C



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X" ± 2 " X.X" ± 0.5 "	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SCSI 180度母座
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC36-SCSIXX-254
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2007180634
			SHEET NO. 1 OF 1