


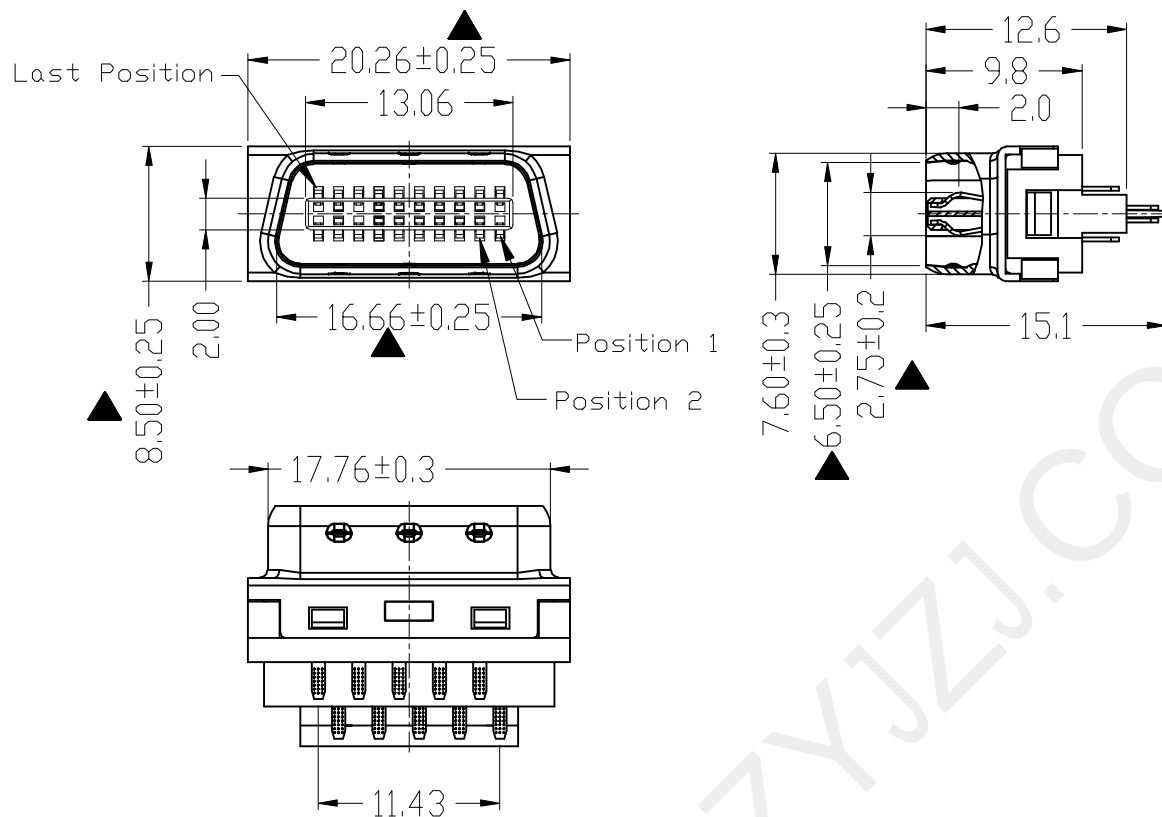

Specification:

- 1.Contact Resistance: 35 m Ohm Max.
- 2.Insulation Resistance: 200 M Ohm Min. At 500V DC.
- 3.Contact Current Rating: 1 Amp AC/DC
- 3.Voltage Rating: 40V AC.
- 4.Withstanding Voltage: 500V AC For 1 Minute.
- 5.Operating Temperature: -25°C to +85°C
- 6.Packing: Tray
- 7.Control Dimensions Indicated From "▲".

Material and Finish:

- 1.Insulator Material: PBTUL94-V0,Black
- 2.Cover Material: PBTUL94-V0,Black
- 3.Hood Plastic Material: ABS,Black
- 4.Bulion Plastic Material: ABS,Black
- 5.Contact Material: Phosphor Bronze(C5191-EH)T=0.25
- 6.Contact Area Plated: Gold 1~30u" Plated Over Nickel 50u"
- 7.Solder Area Plated: Tin Plated(80u" min Lead Free)
- 8.Up or Down Shell Material: SPCC T=0.50
- 9.Up or Down Shell Plated:Nickel 80u" Plated Over Cu 50u"
- 10.Connector Shell Material: SPCC T=0.50
- 11.Connector Shell Plated: Gold 1~3u" Plated Over Cu 50u"
- 12.Hook Spring Material: Stainless Steel T=0.30



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SCSI 20PIN焊线成型插头
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC48-SCSI20-126
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2104200904
			SHEET NO. 1 OF 1