



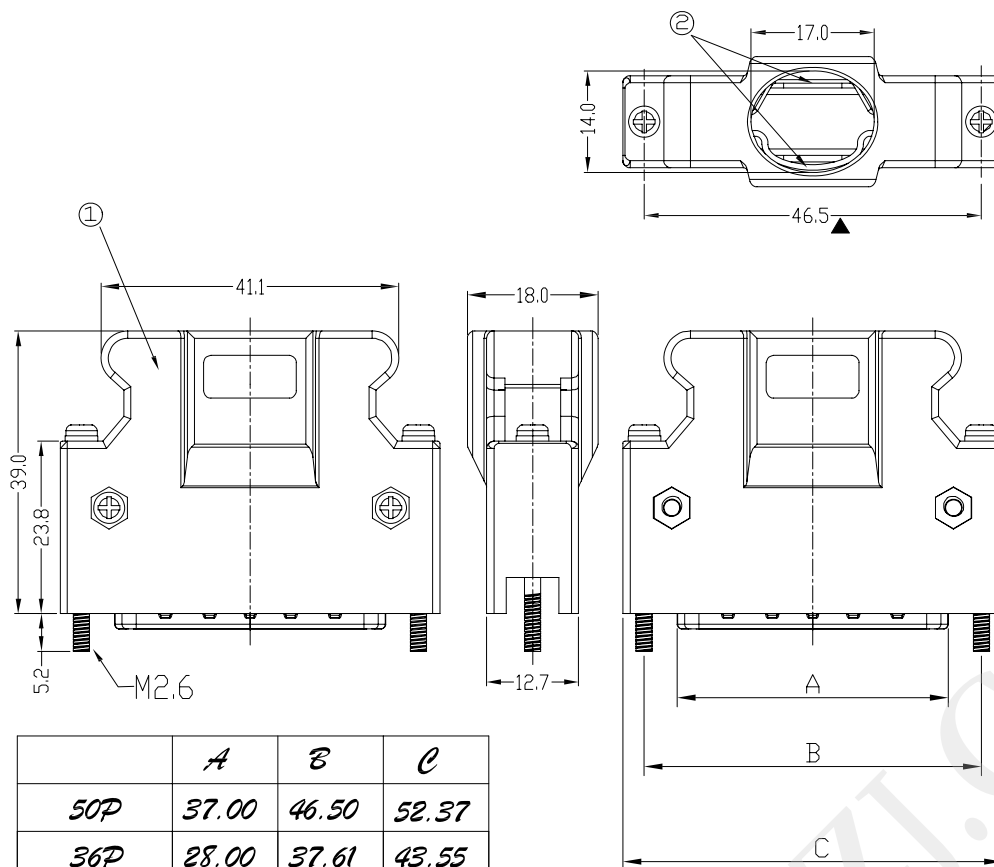

	A	B	C
50P	37.00	46.50	52.37
36P	28.00	37.61	43.55
26P	21.50	31.26	37.05
20P	17.60	27.45	33.26
14P	13.80	23.64	29.35

⑥	SHELL	1	SPCC	Gold PLATING Or Nickel
⑤	COVER	PINS	Copper Alloy	Gold PLATING
④	HOUSING	1	PBT	UL 94V-0
③	Cover	1	PBT	UL 94V-0
②	Clamp	2	Spcc	
①	Plastic shell	2	ABS	
ITEM	PART NAME	Q'TY/EA	MATETIALS	NOTE

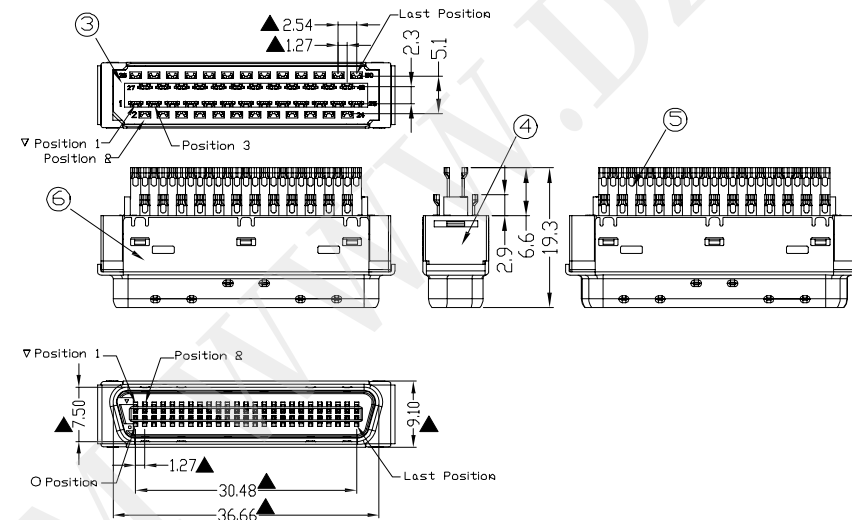

Specification:

- 1.Contact Resistance: 35 m Ohm Max.
- 2.Insulation Resistance: 200 M Ohm Min. At 500V DC.
- 3.Contact Current Rating: 1 Amp AC/DC
- 3.Voltage Rating: 40V AC.
- 4.Withstanding Voltage: 500V AC For 1 Minute.
- 5.Operating Temperature: -25°C to +85°C
- 6.Wire Accomodation: 24,26,28 & 30 AWG
- 7.Packing: Tray
- 8.Control Dimensions Indicated From" ▲ ".

Material and Finish:

1. Insulator Material: Glass Reinforced Polyester(PBT) UL94-V0,Black
2. Contact Material: Phosphor Bronze(C5191-EH)T=0.30
3. Shroud Material: Spcc
4. Contact Area Plated: Gold 1~30u" Plated Over Nickel 50u".
5. Solder Area Plated: Tin Plated(80u" min Lead Free)



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SCSI 14/20/26/36/50P 焊线式公头
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC53-SCSIXX-254
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4			DRAW NO: HYC-2106111639
			SHEET NO. 1 OF 1