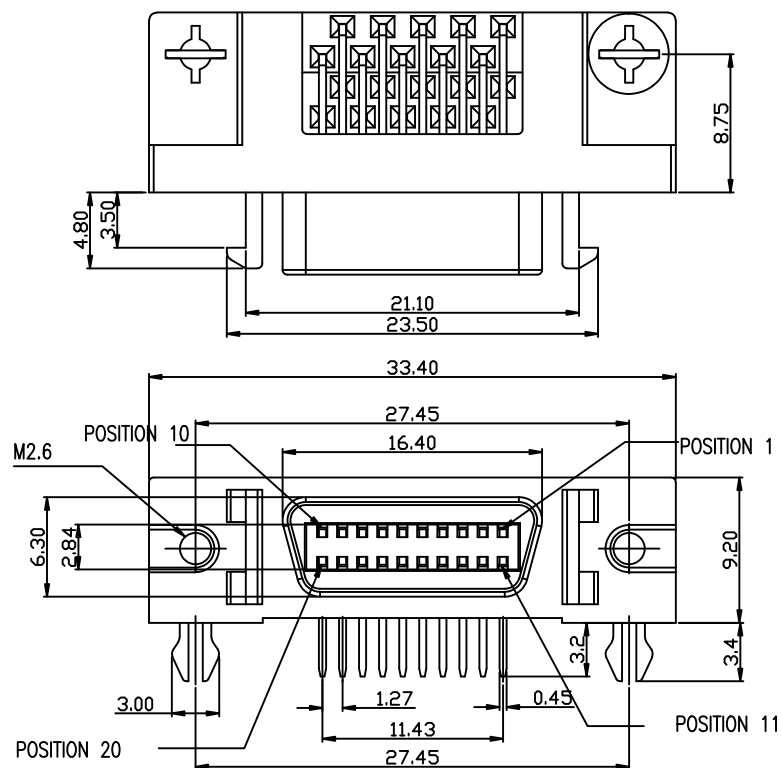



NOTE:

1.MATERIALS:

1. HOUSING: THERMOPLASTIC, UL 94V-0 RATED.
2. COVER: THERMOPLASTIC, UL 94V-0 RATED.
3. CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATED
4. SHELL: SPCC, NICKEL PLATED.
5. HARPOON: COPPER ALLOY, TIN OVER NICKEL

2.SPECIFICATION:

1. RATED CURRENT: 0.30A/CONTACT
2. INSULATION RESISTANCE: 500MOHM MIN.
3. DIELECTRIC WITHSTANDING VOLTAGE:250V AC FOR 1 MINUTE.
4. OPERATING TEMPERATURE: -25°C TO +85°C
3. ▽ REPRESENTS A CRITICAL DIMENSION.
4. ROHS COMPLIANT.

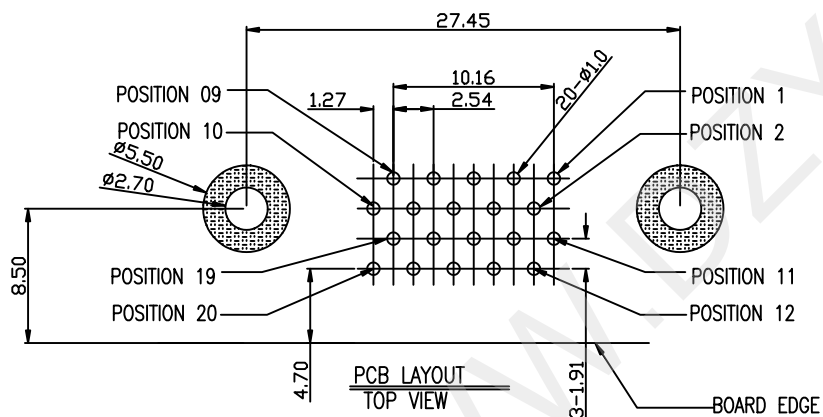

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X" ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SCSI母座 20P 90度 锌合金
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC91-SCSI20-254
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2504221432
			SHEET NO. 1 OF 1