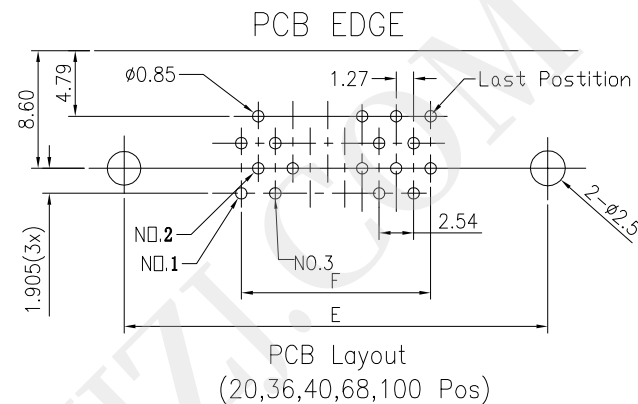
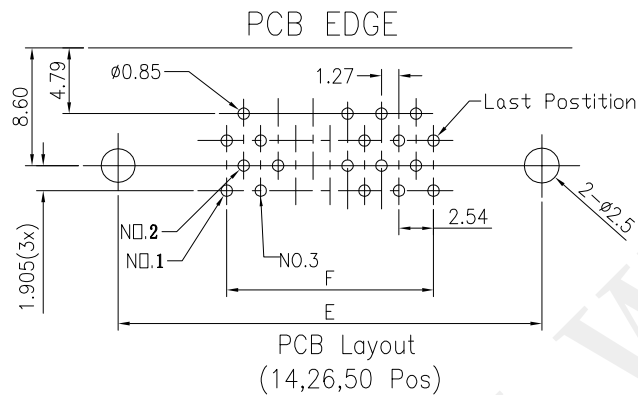
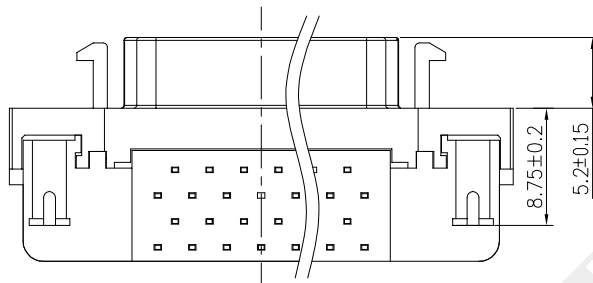
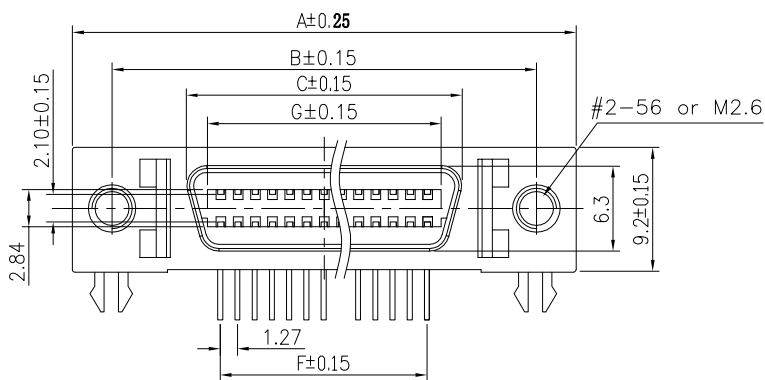
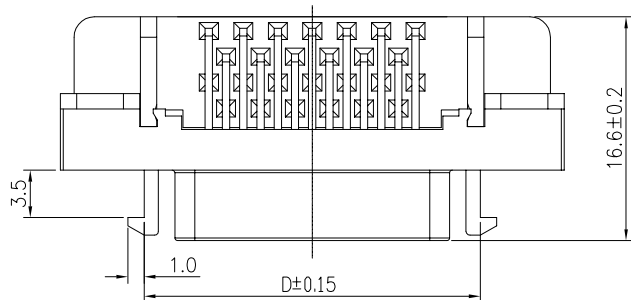


No. of Pin	DIMENSIONS						
	A	B	C	D	E	F	G
14	29.57	23.64	12.63	17.25	23.64	7.62	9.52
20	33.40	27.45	16.44	21.06	27.45	11.43	13.10
26	37.19	31.26	20.25	24.76	31.26	15.24	17.10
36	43.54	37.61	26.60	31.11	37.61	21.59	23.40
40	46.15	40.15	29.14	33.65	40.15	24.13	25.99
50	52.50	46.5	35.49	40.0	46.5	30.48	32.29
68	63.92	57.92	46.92	51.43	57.92	41.91	43.77
100	84.18	78.23	67.10	71.75	78.23	62.23	64.09

SPECIFICATIONS

Housing: Thermoplastic, PBT, UL94V-0

Color: Black

Contact: Copper Alloy

Shell: Zinc Alloy

Voltage Current Rating: 1.0AMP, 250V AC

Insulation Resistance: 500MΩ Min.

Contact Resistance: 30mΩ Max.

Dielectric Withstanding Voltage: 500V AC

Temperature Range: -40° C to +105° C



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SCSI 母座 90度	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC05-SCSIXX-254	MOLD NO.
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 柯南	DATE : 2014-02-23	DRAW NO: HYC-2303301509	SHEET NO. 1 OF 1