


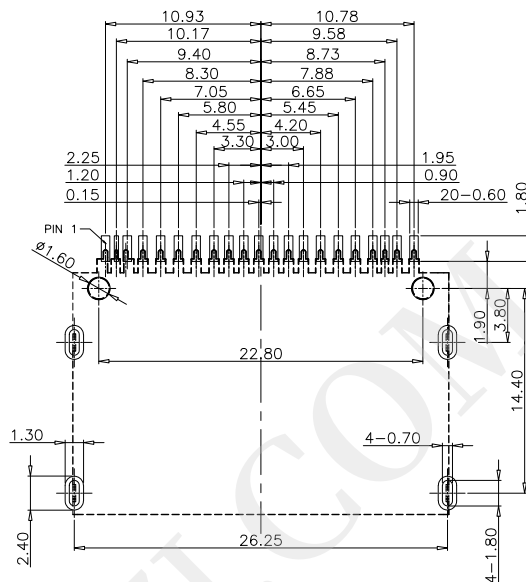
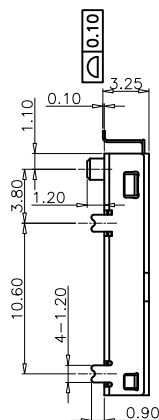
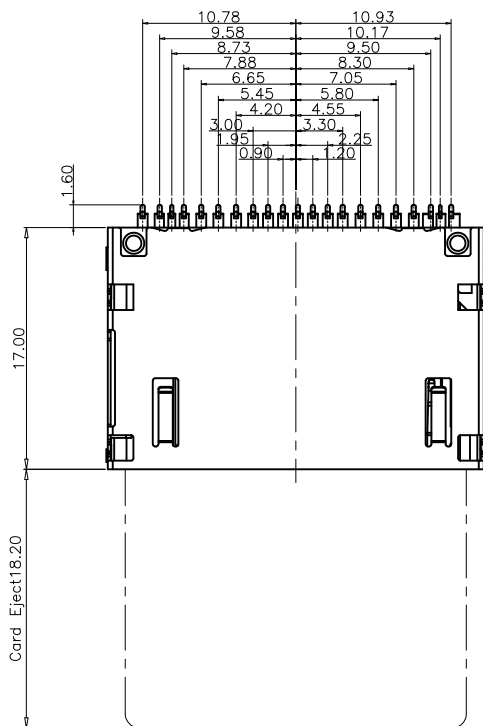


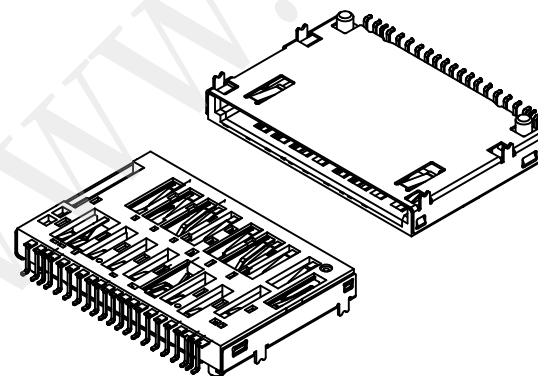

:PAD AREA
:GND PATTERN ONLY
:KEEP OUT AREA
:NO COPPER AREA
 (NO Trace&Via&GND)

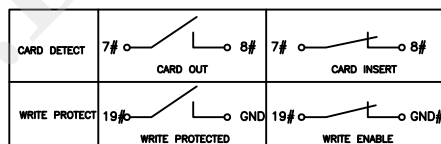

- 1.All Dimensions are in Millimeters.
- 2.Operation voltage: 10 VAC max.
- 3.Current rating : 1 Amps max.
- 4.Contact resistance: 100m ohms max.
- 5.Insulation resistance: 1000M ohms min. 500 VDC
- 6.Dielectric withstanding voltage: 500 VAC / 1minute
- 7.Operating Temperature: -20°C to +60°C
- 8.Storage Temperature: -40°C to +70°C
- 9.Durability 10000 cycles.

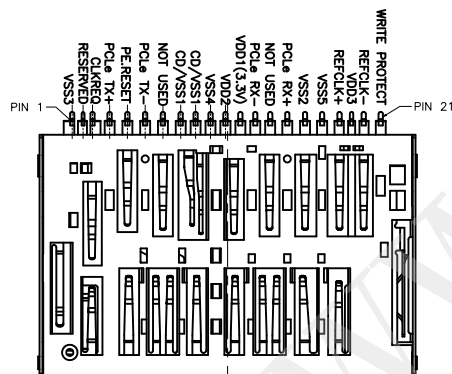

深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.* ±0.5*				SD 7.0 NO PUSH 短体DIP 板下型 3.2P	
 UNIT: mm [inch]		CHECKED BY:	DATE :	PART NO.	HYC108-SD21-325
		马跃	2014-02-23	MOLD NO.	
SCALE:1:1 SIZE: A4		APPROVED BY:	DATE :	DRAW NO:	HYC-2509191648
		邱敏	2014-02-23	SHEET NO.	1 OF 1