


TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2" X.X ±0.5"		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SD 8.0 PUSH SMT 3.58H	
CHECKED BY: 马跃				DATE : 2014-02-23	
 UNIT: mm [inch]		APPROVED BY: 邱敏	DATE : 2014-02-23	PART NO.	HYC99-SD29-358
				MOLD NO.	
SCALE:1:1		SIZE: A4	DRAW NO:	HYC-2509011549	
				SHEET NO.	1 OF 1

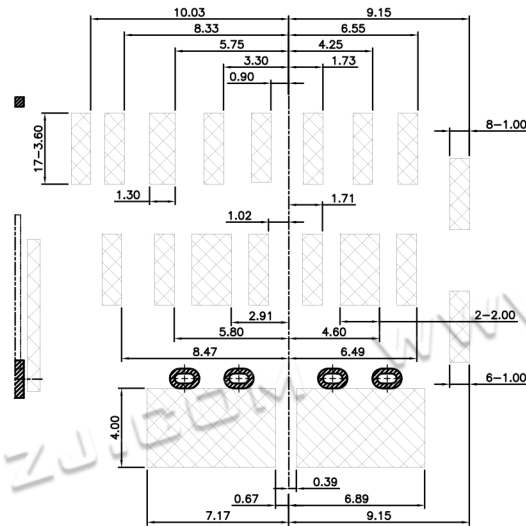

Technical drawing of a mechanical part showing a cross-section with dimensions. The part has a total width of 10.00 and a height of 4.00. It features four circular holes with a diameter of 4.00. The holes are spaced 5.28 apart, with a 2.53 offset from the left edge and a 2.23 offset from the right edge. The rightmost hole has a fillet radius of R0.25 and a chamfer of 4-0.50.

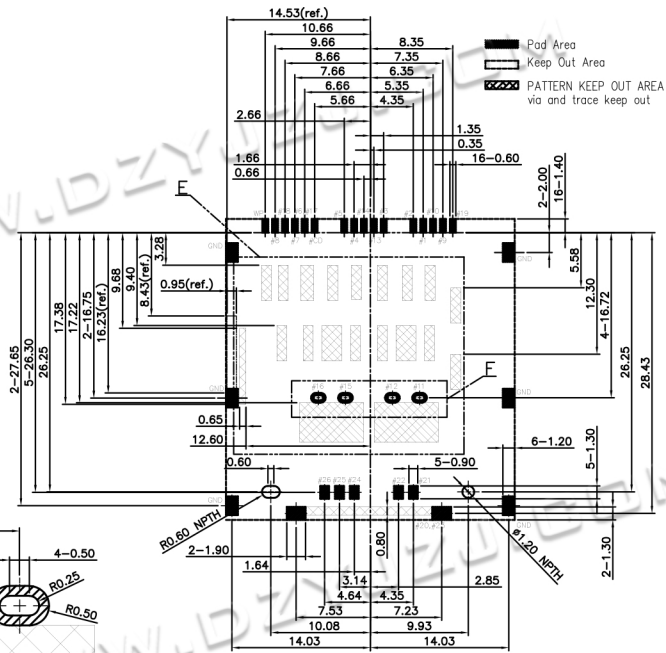


Diagram illustrating the Recommended ID Dimension for a cable. The total width is 24.95 inches. The core diameter is 1.73 inches. The insulation thickness is 2.67 inches. The diagram is labeled "Recommended ID Dimension" and "Center of Cord".

深圳市华宇创精密电子有限公司

PART NAME:
SD 8.0 PUSH SMT 3.58H

PART NO.	HVC99-SD29-358
----------	----------------

DRAW NO:	HYC-2500011540
----------	----------------

SHEET NO.	1 OF 1
-----------	--------

SCALE:1:1	SIZE: A4
-----------	----------

SCALE:1:1	SIZE: A4
-----------	----------