
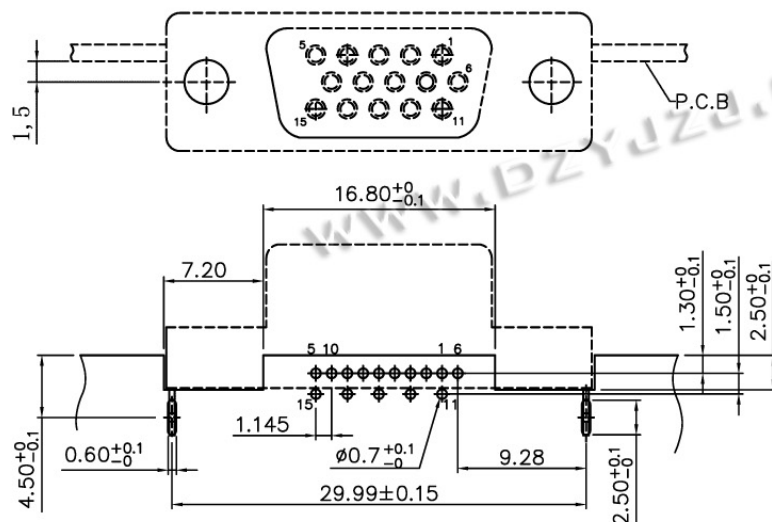



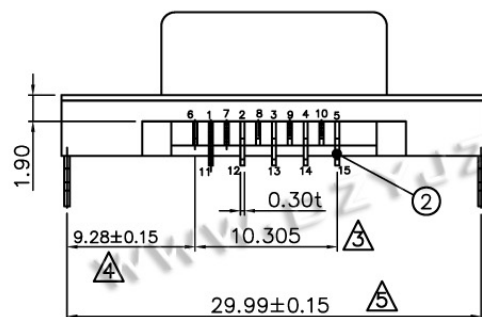
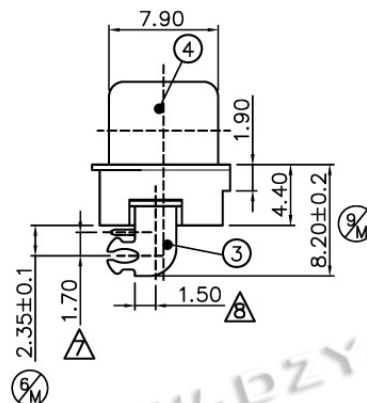


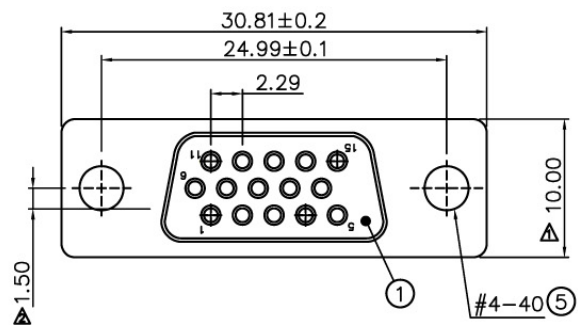

Recommended P.C.B Layout (component side)

	无螺丝
	附螺丝
	锁螺丝

螺丝规格可由订单决定, 不另编料号

特性: Specifications:

电器 Electrical:

接触阻抗: Contact Resistance
30milliohms MAX

耐电压: Dielectric Withstanding
Voltage:

500V AC AT sea LevoL

绝缘阻抗: Insulation Resistance:
500MEGA ohms MIN

Working temprayure: -30° C~+85° C

材料: Matorial:

塑胶: LCP

端子: Contact: C2680

Piated Gold in Mating Area;
Tin/Lead On Solder Tails

外壳: Shell: SPCC

寿命测试: life test:

插拔力: 插入力 MAX: 4.5Kgf 拔出
力 MIN: 0.45Kgf

5000次, 插拔速度 300次/小时

盐雾测试: 12H

5	RIVET	BRASS/NICKEL PLATED	100U"
4	SHELL	SPCC/NICKEL PLATED	100U"
3	FORK	SPCC/TIN PLATED	100U"
2	TERMINAL	Brass/C2680	GOLD FLASH
1	HOUSING	LCP	
NO.	PART NAME	DESCRIPTION	REMARK



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2° X.X' ±0.5°

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

SLIM VGA 15P/F反向CL=1.5mm

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC26-VGA15B-150

APPROVED BY:

邱国夷

DATE :

2014-02-23

DRAW NO:

HYC-VGA16070818

SHEET NO.

1 OF 1