
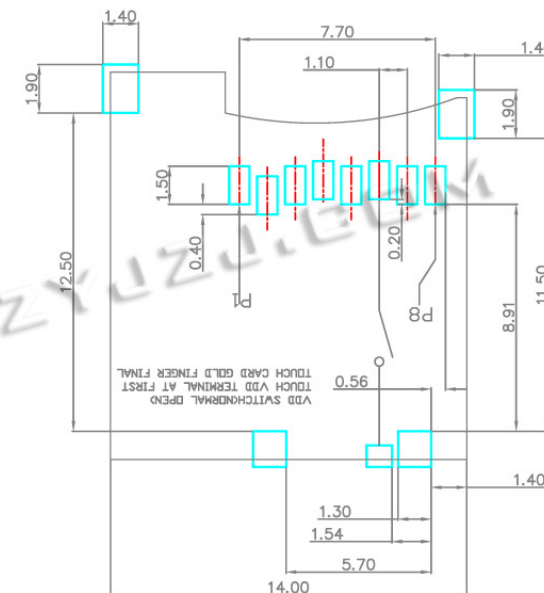

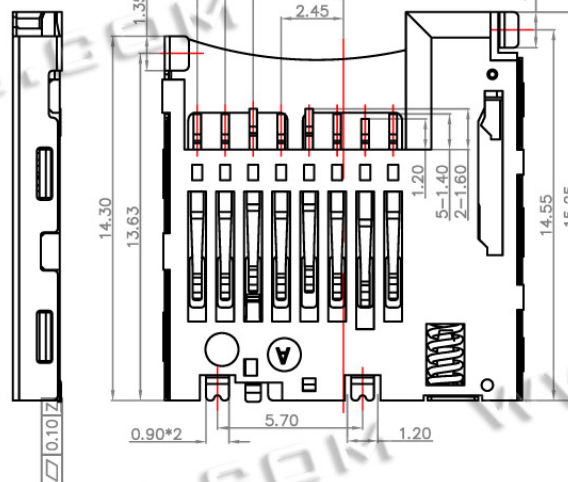
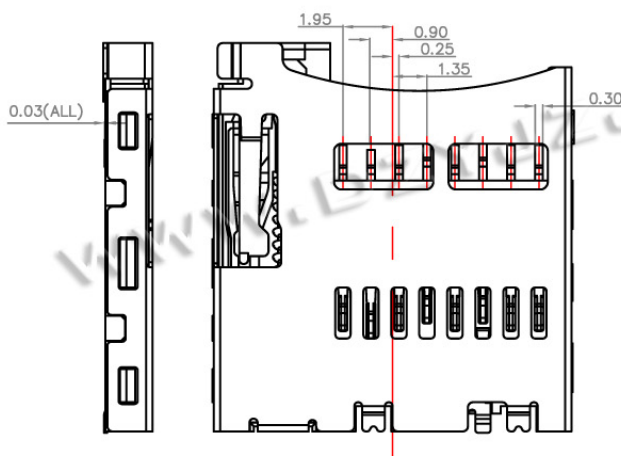
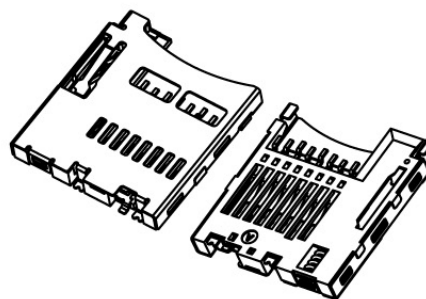





RECOMMEND PCB LAYOUT

GENERAL TOLERANCE ± 0.05

SPECIFICAION:

1. Electrical characteristics
 - 1.1 Contact current rating: 0.5A Max.
 - 1.2 Contact resistance: 100 milli-Ohm Max.
 - 1.3 Insulation resistance: 250V DC or 300V AC for no less than 1 minute
2. Mechanical characteristics
 - 2.1 Mating durability: 10000 cycles.
 - 2.2 Insertion force: 2.0Kgf Max.
 - 2.3 Extraction force: 0.5Kgf Min.
3. Environmental characteristics
 - 3.1 Operation temperature range: -25° C to +85° C

Pin No.		MICRO SD
PIN1	DAT2	1P
PIN2	CD/DAT3	2P
PIN3	CMD	3P
PIN4	VDD	4P
PIN5	CLK	5P
PIN6	VSS	6P
PIN7	DAT0	7P
PIN8	DAT1	8P
PIN9	CARD DETECT	
PIN10		




WITHOUT CARD



CARD INSERTED



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"		DRAWN BY : 吴迪		DATE : 2014-08-22		PART NAME: TF PUSH 内焊1.85H 常开型	
 UNIT: mm [inch]		CHECKED BY: 马跃		DATE : 2014-08-22		PART NO. HYC25-TF08-185	
		APPROVED BY: 邱国夷		DATE : 2014-08-22		MOLD NO. 	
SCALE:1:1		SIZE: A4		DRAW NO: HYC-TF14082201		SHEET NO. 1 OF 2	