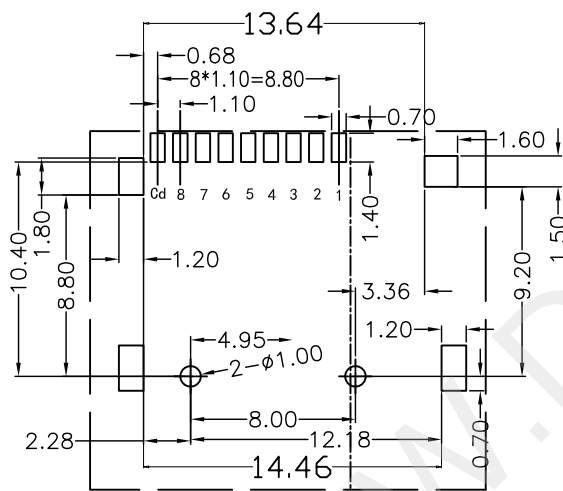
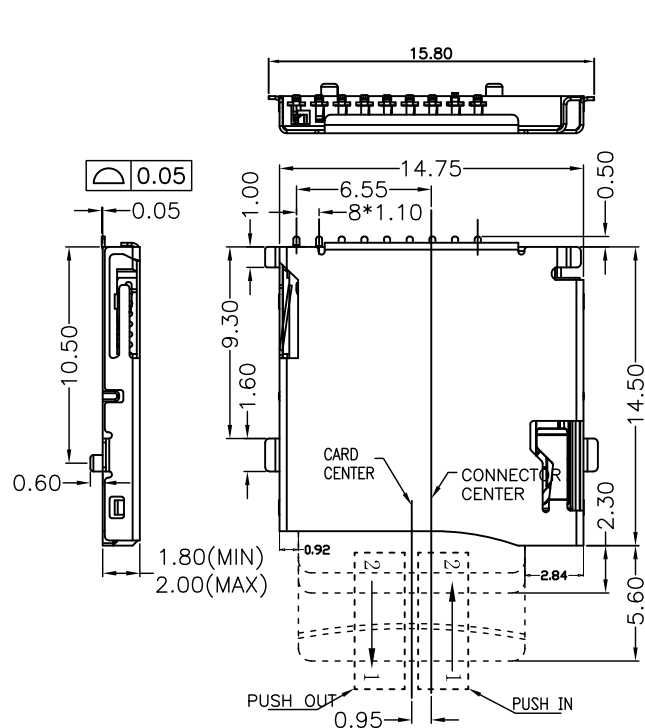
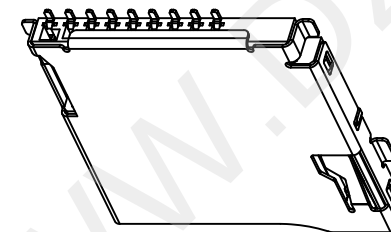
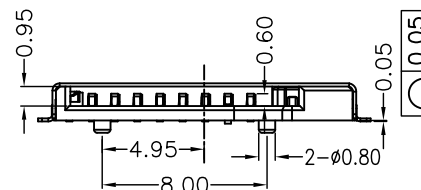


RECOMMENDED P.C.B HOLE LAYOUT  
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

| PIN NO. | NAME    | YTYPE  | DESCRIPTION                |
|---------|---------|--------|----------------------------|
| 1       | DAT2    | I/O/PP | DATE LINE(BIT2)            |
| 2       | CD/DAT3 | I/O/PP | CARD DETECT DATE LIN(BIT3) |
| 3       | CMD     | PP     | COMMAND RESPONSE           |
| 4       | VDD     | S      | SUPPLY VOLTAGE             |
| 5       | CLX     | I      | CLOCK                      |
| 6       | VSS     | S      | SUPPLY VOLTAGE GROUND      |
| 7       | DAT0    | I/O/PP | DATE LINE(BIT0)            |
| 8       | DAT1    | I/O/PP | DATE LINE(DIT1)            |

## NOTES:

## 1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC  
UL94V\_0,COLOR:BLACK.

CONTACT: COPPER ALLOYS.

COVER: COPPER ALLOYS OR STEEL.

## 2.PLATING:

UNDERPLATE: NICKEL.

CONTACT AREA: GOLD OVER NICKEL.

SOLDER AREA: TIN OVER NICKEL.

## 3.MULTIMEDIA CARD COMPATIBLE



深圳市华宇创精密电子有限公司

|                                                                           |                    |                      |                                        |
|---------------------------------------------------------------------------|--------------------|----------------------|----------------------------------------|
| TOLERANCE:<br>X.X ±0.30<br>X.XX ±0.25<br>X.XXX ±0.15<br>X' ±2" X.X' ±0.5" | DRAWN BY :<br>陈一鸣  | DATE :<br>2014-02-23 | PART NAME:<br>TF PUSH 外焊               |
| UNIT: mm [inch]                                                           | CHECKED BY:<br>马跃  | DATE :<br>2014-02-23 | PART NO.<br>HYC182-TF09-200            |
| SCALE:1:1 SIZE: A4                                                        | APPROVED BY:<br>邱敏 | DATE :<br>2014-02-23 | MOLD NO.<br>DRAW NO:<br>HYC-2504161530 |
|                                                                           |                    |                      | SHEET NO.<br>1 OF 1                    |