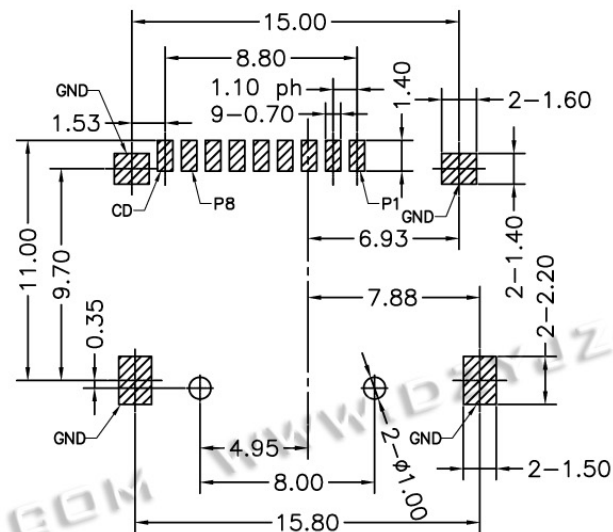
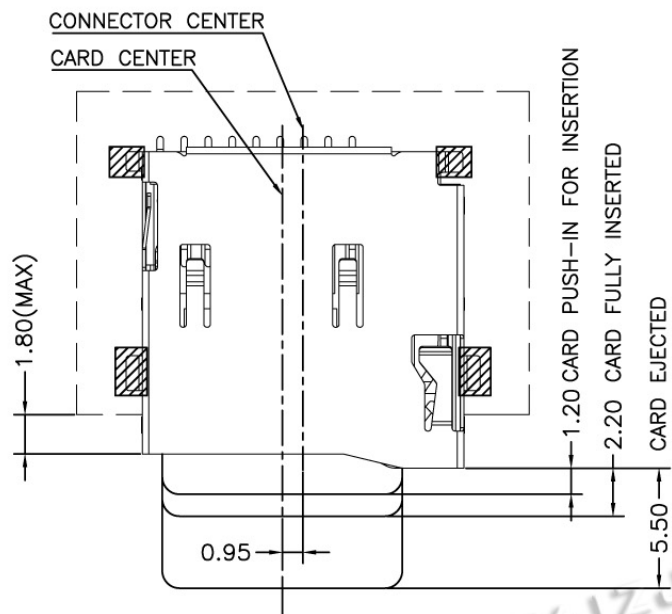
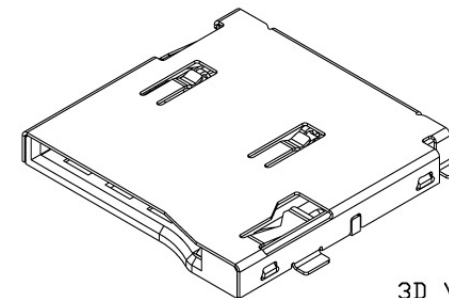
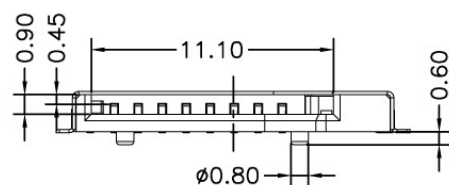
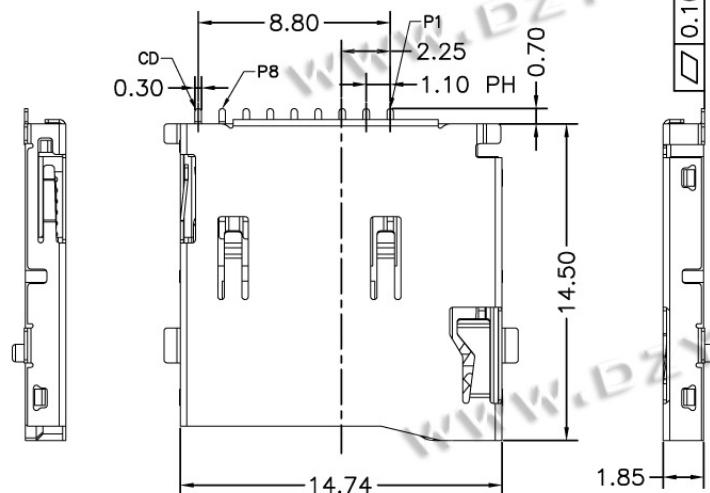


PCB LAYOUT TOP VIEW
(TOLERANCE: ±0.05)

3D VIEW

Pin No.	Pin assignment	Pin No.	Pin assignment
1	DAT2	5	CLK
2	CD/DAT3	6	VSS
3	CMD	7	DAT0
4	VDD	8	DAT1

CARD DETECTION SWITCH	
WHEN CARD IS EJECTED	WHEN CARD IS INSERTED
OPEN	CLOSE
Cd G	Cd G

SPECIFICATION

- ELECTRICAL CHARACTERISTICS:
CONTACT CURRENT RATING: 0.5 AMPERES.
DIELECTRIC WITHSTANDING VOLTAGE: AC500V R.M.S.
INSULATION RESISTANCE: 1000MΩ MINIMUM.
CONTACT RESISTANCE: 100mΩ MAXIMUM.
- MECHANICAL CHARACTERISTICS:
MATING CYCLES: 5,000 INSERTIONS.
INSERTION FORCE: 2.0KGF MAX.
EXTRACTION FORCE: 0.4KGF MIN.
- ENVIRONMENTAL:
OPERATING TEMPERATURE: -20℃ ~ +85℃.
- MATERIAL:
HOUSING: H1-TEMP PLASTIC LCP UL 94V-0 RATED
SLIDER: H1-TEMP PLASTIC LCP UL 94V-0 RATED
CONTACT: COPPER ALLOY (T=0.15MM).
SHELL: STAINLESS STEEL (T=0.15MM).
DRAG LINK: STAINLESS STEEL (Ø0.30MM).
SPRING: SWP



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: TF PUSH 外焊双压片	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC73-TF09-185
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-TF16081610
			SHEET NO.	1 OF 1