


PIN ASSIGNMENT											
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	SSTXp1	SSTXn1	VBUS	CC1	Dp1	Dn1	SBU1	VBUS	SSRXn2	SSRXp2	GND
GND	SSRXp1	SSRXn1	VBUS	SBU2	Dn2	Dp2	CC2	VBUS	SSTXn2	SSTXp2	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

6	SHELL	1	STAINLESS STEEL	NI 50u" min
5	EMC	2	STAINLESS STEEL	CLEAN
4	MOLDING1	3	LCP UL94V-0	BLACK
3	GROUND PLATE	1	STAINLESS STEEL	CLEAN
2	DOWN CONTACT	12	HIGH CONDUCTIVITY COPPER	CONTACT AREA Au 3u" min ,SOLDER AREA G/F OVER NI 50u" min
1	UP CONTACT	12		
ITEM	NAME	Q'TY	MATERIAC	FINISH

深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 母座24P 板上单排SMT CH1.53
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC678-USBC24-826
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO. /
			DRAW NO: HYC-2505280901
			SHEET NO. 1 OF 1

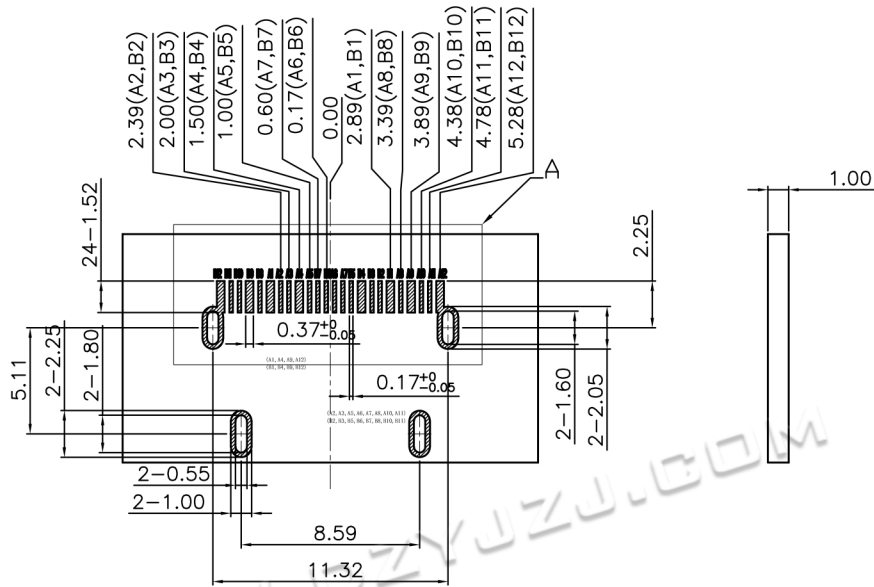



RECOMMENDED P.C.B LAYOUT
 TOP VIEW(TOLERANCE±0.05)
 PAD AREA

NOTES:

1. Operating condition: Temperature -40°C ~ +85°C;
Humidity 80% R.H MAX
2. MECHANICAL PERFORMANCE
 - 2.1 Insertion Force: 5-20N .
 - 2.2 Withdrawal Force: 8-20N.1-1000 CYCLES
6-20N 1001-10000 CYCLES
 - 2.3 Durability: 10000 Cycles Min.
3. ELECTRICAL PERFORMANCE:
 - 3.1 Rated voltage: AC 20V RMS
 - 3.2 Rated current: 1.25A FOR (A1,A4,A9,A12,B1,B4,B9,B12)
0.25A FOR OTHER PER PIN
 - 3.3 Contact Resistance: 40mΩ MAX

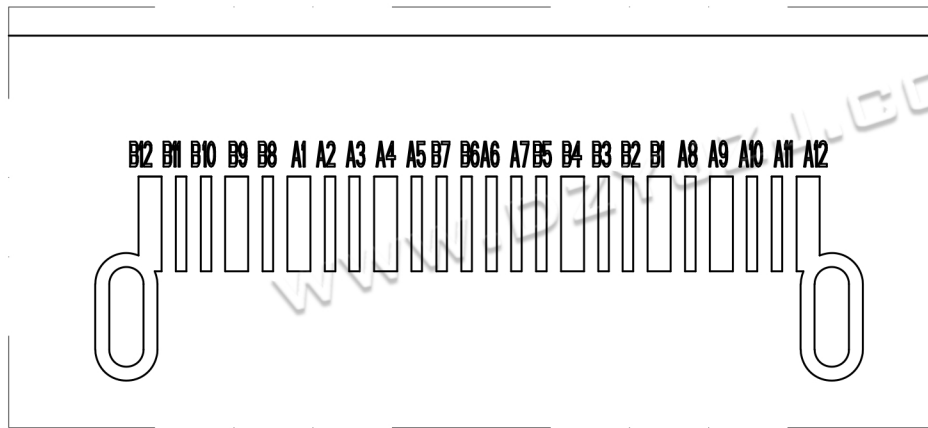

DETAIL A
 SCALE 3:1

 深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 母座24P 板上单排SMT CH1.53
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC678-USBC24-826
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO. /
			DRAW NO.: HYC-2505280901
			SHEET NO. 1 OF 1