

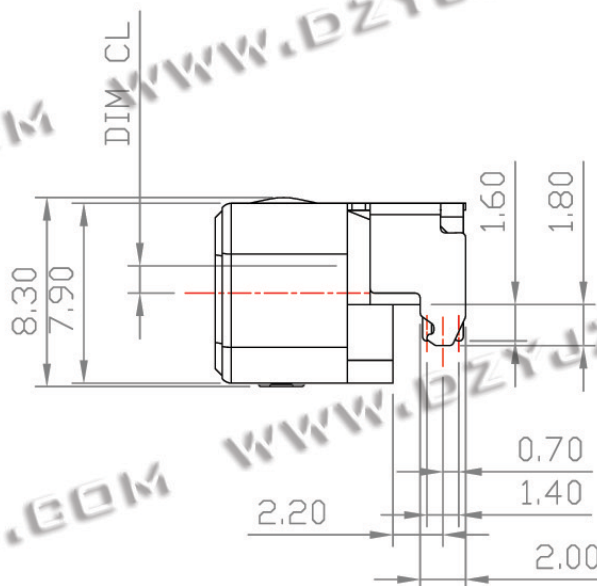
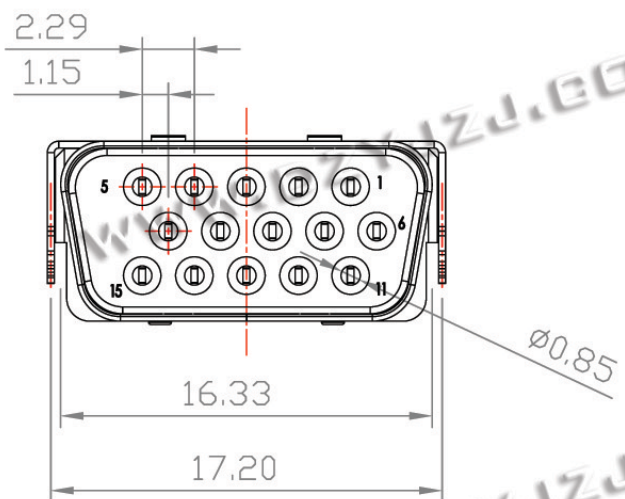
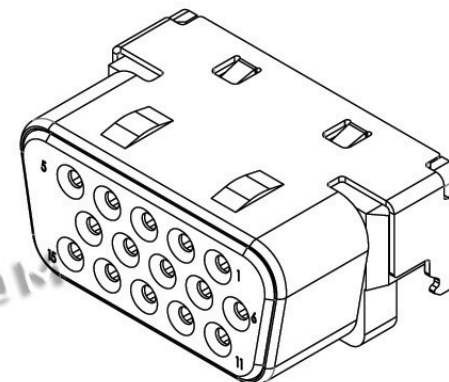


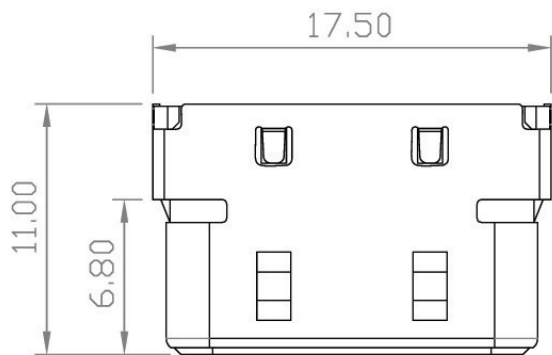


DIM CL
-1.2
-1.0
-0.5
0
0.5
1
1.2

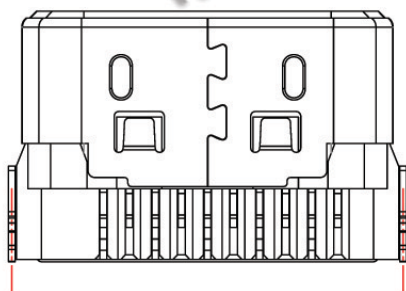


深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2° X.X' ±0.5° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY :	DATE :	PART NAME:	
	陈一鸣	2014-02-23	VGA超薄短体 正向CH=-1.2~1.2	
	CHECKED BY:	DATE :	PART NO.	HYC18-VGA15B-XXX
	马跃	2014-02-23	MOLD NO.	
	APPROVED BY:	DATE :	DRAW NO:	HYC-VGA16022610
	邱国夷	2014-02-23	SHEET NO.	1 OF 1

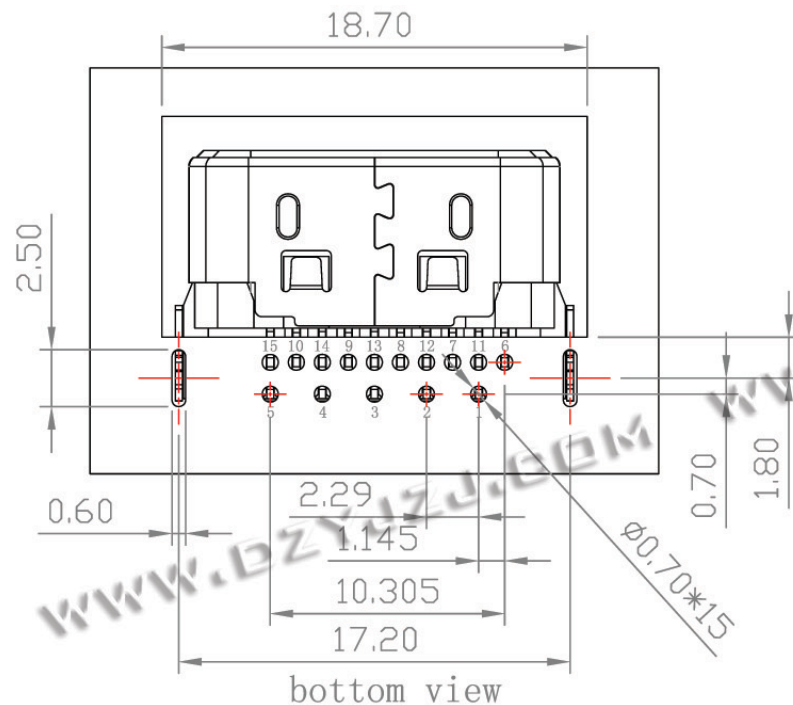

bottom view

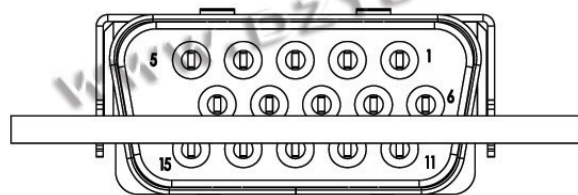

front view

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)

FOR P.C.B THICKNESS:1.20

特性:Specifications:

电器 Electrical:

接触阻抗:Contact Resistance
30 m Ω MAX

耐电压:Dielectric Withstanding Voltage:

500V AC AT sea Level

绝缘阻抗:Insulation Resistance:

1000 M Ω MIN

Working temperature:-30° ~+85°

材料:Material:

塑胶: LCP

端子: Contact:C2680

Plated Gold in Mating Area;

Tin/Lead On Solder Talls

外壳:Shell: SPCC

寿命测试: life test:

5000次, 插拔速度300次/小时

插入力MAX: 4.5Kgf

拔出力MIN: 0.45Kgf

盐雾测试: 24H



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: VGA超薄短体 正向CH=-1.2~1.2
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC18-VGA15B-XXX
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-VGA16022610
			SHEET NO. 1 OF 1