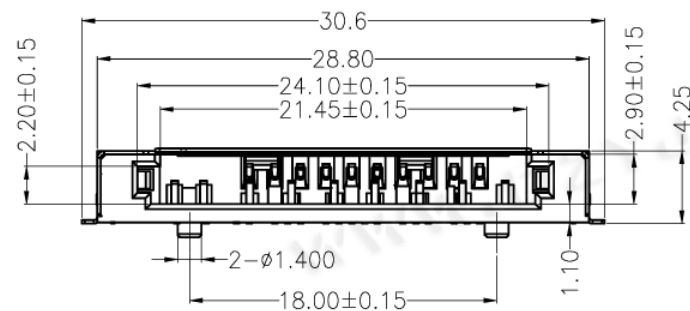
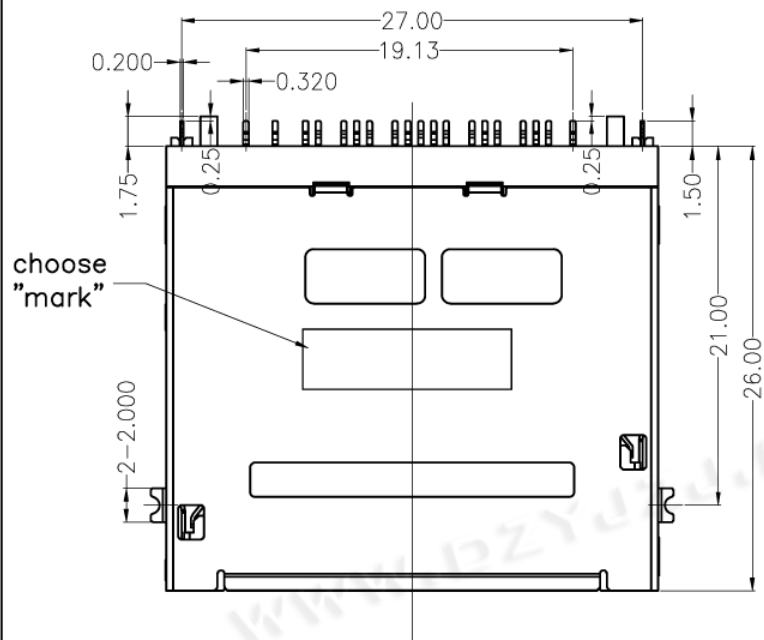


Specification

MATERIAL:

Insulator: High Temperature Thermoplastic,
UL 94V-0.

Contact: Copper Alloy

Shell: Copper Alloy

PLATING:

Contact: Plated 50u" Ni Overall

Plated Au Selective Contact Area

Plated 100u" Sn Over Ni On Solder Area

Shell: Plated 50u" Ni Overall

Plated 1u"Au Over Ni On Solder Area

Property:

Current Rating :0.5A AC/DC max.

Voltage Rating :125V AC/DC

Operating Temperature Range : -20°C~+60°C

Ambient Humidity Range :95% R.H. Max.


Contact Resistance:100m Ω max.

Insulation Resistance:1000M Ω min./500VDC

Durability:10,000 cycles

Usable Memory Card:

SD&MMC&MS Card

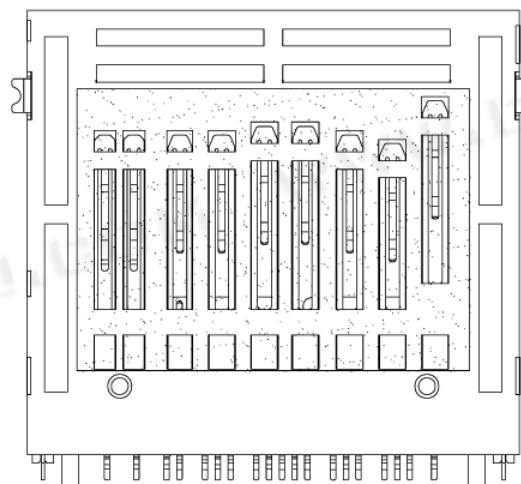

贴麦拉图示

CIRCUIT:



WITHOUT CARD



SD CARD INSERTED
WRITE PROTECT:LOCK



1.SD CARD INSERTED
WRITE PROTECT:UNLOCK
2.OTHER CARD INSRTED



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X.* ±2° X.X° ±0.5°

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

三合一TD卡座

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NO.

HYC09-3IN121-260

MOLD NO.

DRAW NO:

HYC-IN13254120



SHEET NO.

1 OF 5

PIN ASSIGNMENT:

RECOMMEND PCB LAYOUT:

(Unit:mm .X $\pm$ 0.15 .XX $\pm$ 0.05 .XXX $\pm$ 0.02)

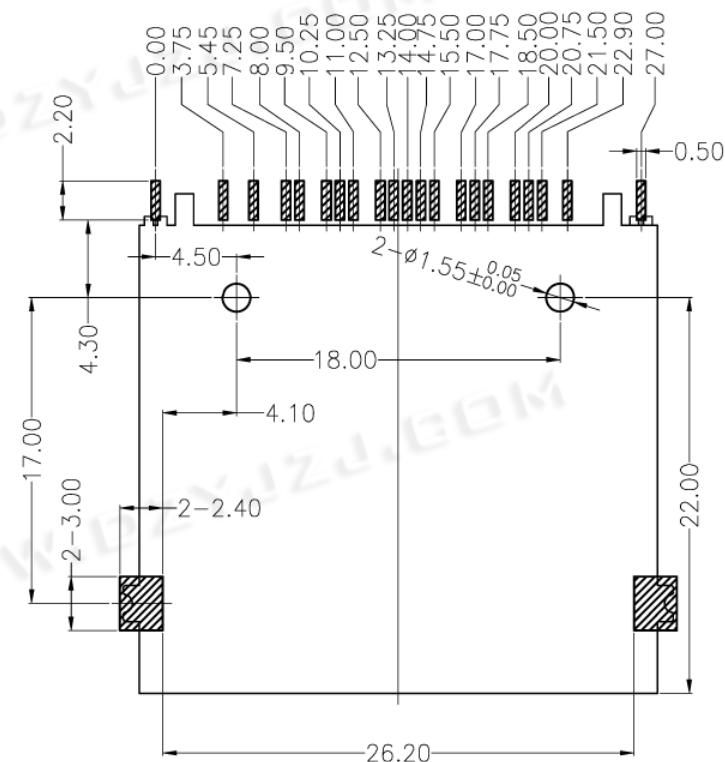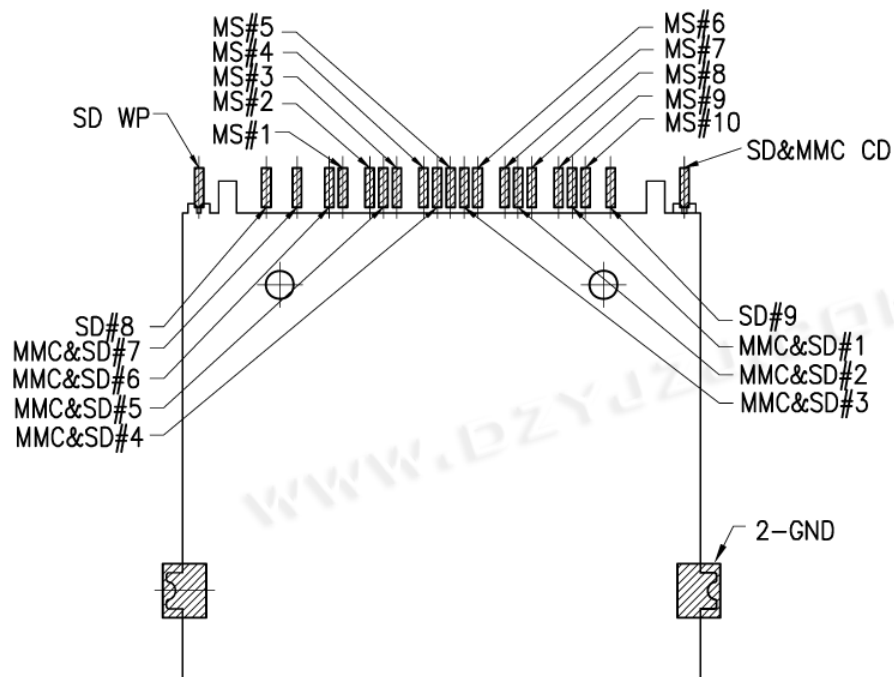


PIN NO.	MEMORY CARD PIN NO.	PIN NO.	MEMORY CARD PIN NO.
MMC&SD#1	MMC/SD-1 (CD/DAT3)	MS#1	VSS
MMC&SD#2	MMC/SD-2 (CMD)	MS#2	BS
MMC&SD#3	MMC/SD-3 (Vss1)	MS#3	DATA1
MMC&SD#4	MMC/SD-4 (VDD)	MS#4	SDIO/DATA0
MMC&SD#5	MMC/SD-5 (CLK)	MS#5	DATA2
MMC&SD#6	MMC/SD-6 (Vss2)	MS#6	INS
MMC&SD#7	MMC/SD-7 (DAT0)	MS#7	DATA3
SD#8	SD-8 (DAT1)	MS#8	SCLK
SD#9	SD-9 (DAT2)	MS#9	VCC
		MS#10	VSS




深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	三合一TD卡座	
X.XX ±0.25					
X.XXX ±0.15					
X.* ±2* X.X* ±0.5*		CHECKED BY:	DATE :	PART NO.	HYC09-3IN121-260
		马跃	2014-02-23	MOLD NO.	
				APPROVED BY:	DATE :
SCALE:1:1	SIZE: A4	邱国夷	2014-02-23	SHEET NO.	2 OF 5


SD Card Insert Drawing:

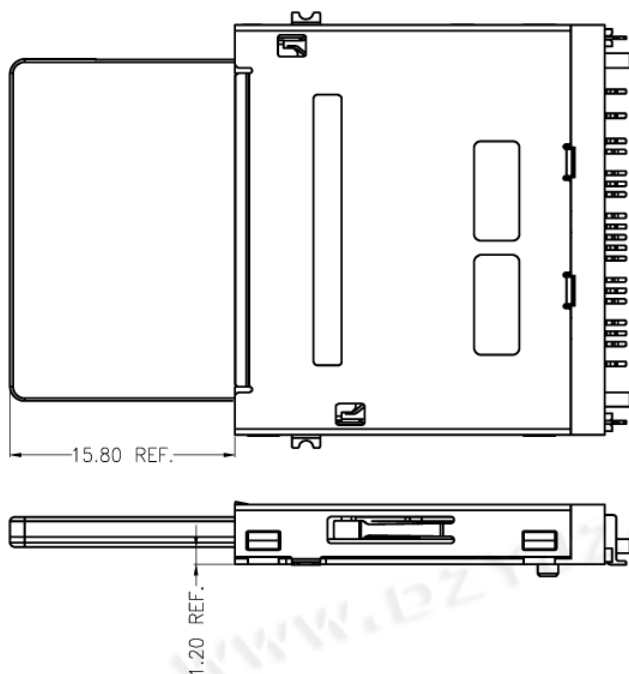

MS Card Insert Drawing:

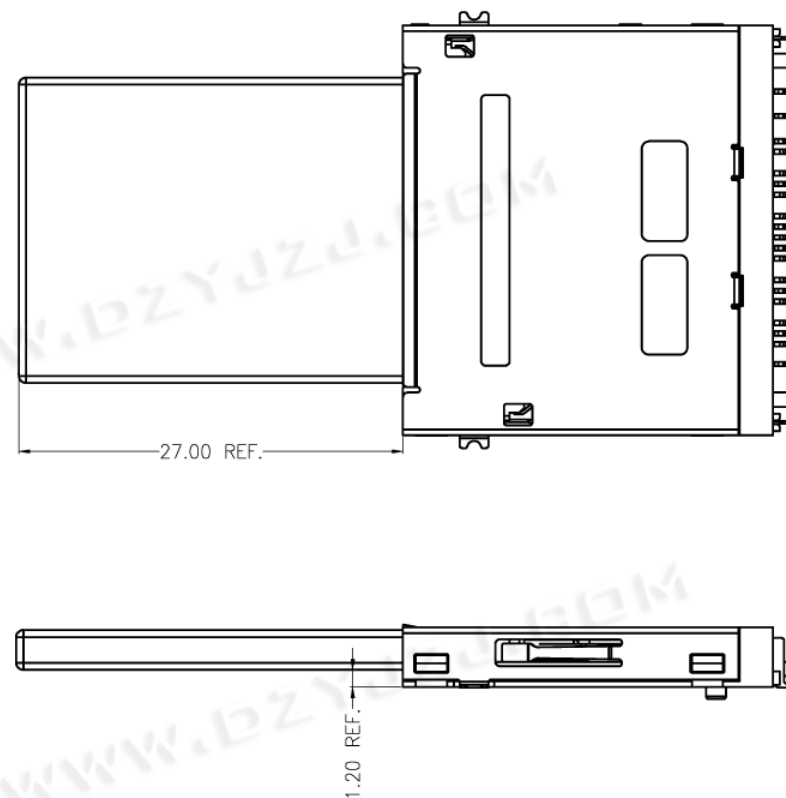





MMC Card Insert Drawing:

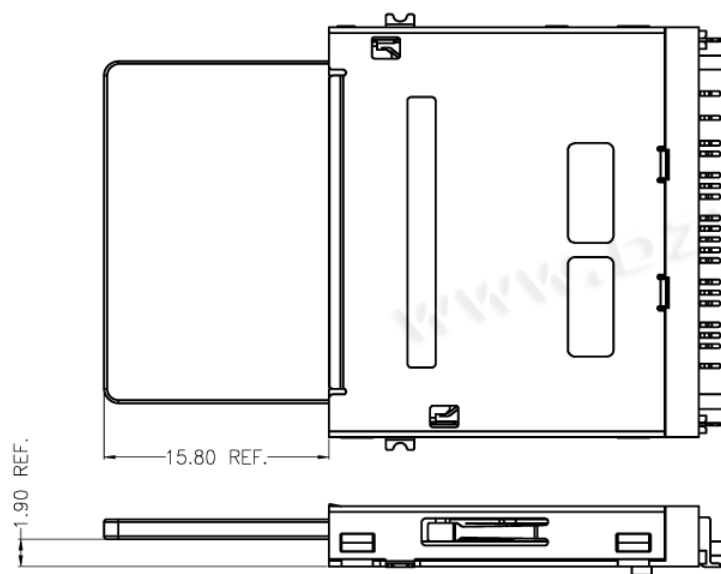

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 三合一TD卡座	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC09-3IN121-260
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO:	HYC-IN13254120
			SHEET NO.	3 OF 5

THE PACKING FOR SD CARD SERIES PUSH TYPE

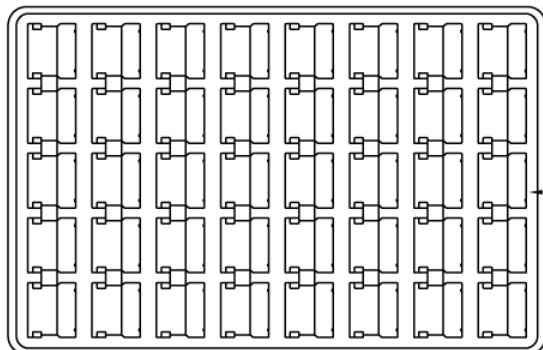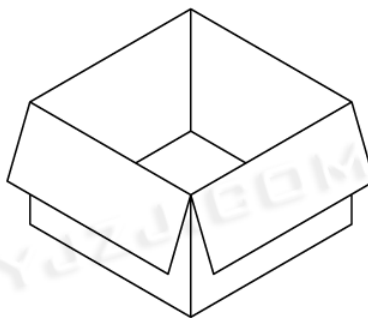产品
PRODUCT真空盘 (规格): 325*210*12mm
TRAY SPEC.: 325*210*12mm真空盘
TRAY防水袋
WATER PROOF BAG纸箱 (规格): 350 (L) * 240 (W) * 250 (H) mm
CARTON SPEC.: 350 (L) * 240 (W) * 250 (H) mm

PACKING STEP


注意 (Note):

1. 将产品一一放入真空盒内, 依同一方向摆放
PUT PRODUCT INTO THE TRAY, AND AS SAME DIRECTION
THE DIRECTION REFERE TO DRAWING
2. 产品放置时, 如图所示
THE DIRECTION REFERE TO DRAWING
3. 每个真空盘装入40pcs 产品
QUANTITY OF PER TRAY: 40 PCS
4. 一个纸箱可放入40个真空盘
QUANTITY OF PER CARTON: 40 TRAYS
5. 最上面一个真空盘用作上盖, 不装入产品
THE TOP TRAY NOT PUT INTO PRODUCT
AS A COVER TO PROTECT PRODUCT
5. 一个纸箱可装入1500 PCS产品
QUANTITY OF PER CARTON: 1500 PCS
6. 若有未装满之尾数箱, 必须用缓冲材加满
THE UNFILLING-CARTON MUST BE FILLED WITH ASSUAGEMENT
7. 装满产品之纸箱, 最大堆积数量为5箱
THE CARTON FULLY FILLED WITH PRODUCTS
THE MAX. ACCUMULATING QUANTITY IS 5 CARTONS
8. 产品单重为: 3.41g; 每箱单重为: 7.18kg/箱
THE WEIGHT OF PER PRODUCT: 3.41g; PER CARTON: 7.18Kg



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1

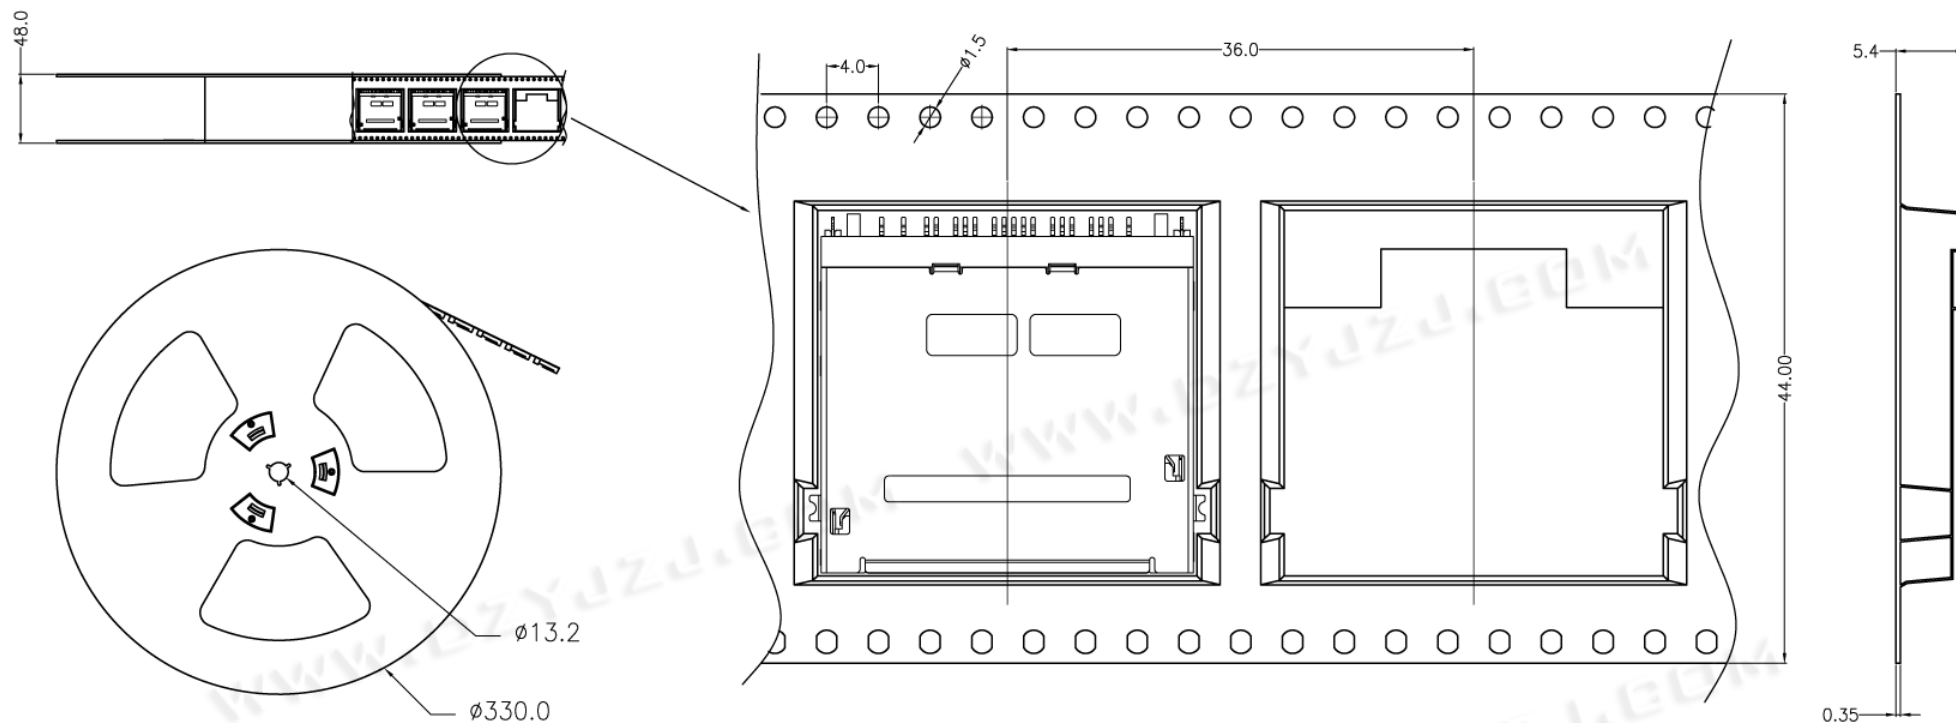

注意 (Note):

1. 将产品一一放入卷带内, 依同一方向摆放 (PUT PRODUCT INTO THE TAPE REEL, AND AS SAME DIRECTION)
2. 产品放置时, 如图所示 (THE DIRECTION REFERS TO DRAWING)
3. 每个卷盘装入300pcs 产品 (QUANTITY OF PER TAPE REEL: 300 PCS)
4. 一个纸箱可放入5个卷盘 (QUANTITY OF PER CARTON: 5 TAPE REEL)
5. 一个纸箱可装入1500 PCS产品 (QUANTITY OF PER CARTON: 1500 PCS)
6. 若有未装满之尾数箱, 必须用缓冲材加满 (THE UNFILLING-CARTON MUST BE FILLED WITH ASSUAGEMENT)
7. 装满产品之纸箱, 最大堆积数量为5箱 (THE CARTON FULLY FILLED WITH PRODUCTS, THE MAX. ACCUMULATING QUANTITY IS 5 CARTONS)
8. 产品单重为: 3.41g; 每箱单重为: 8.05kg/箱 (THE WEIGHT OF PER PRODUCT: 3.41g; PER CARTON: 8.05kg)



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1