
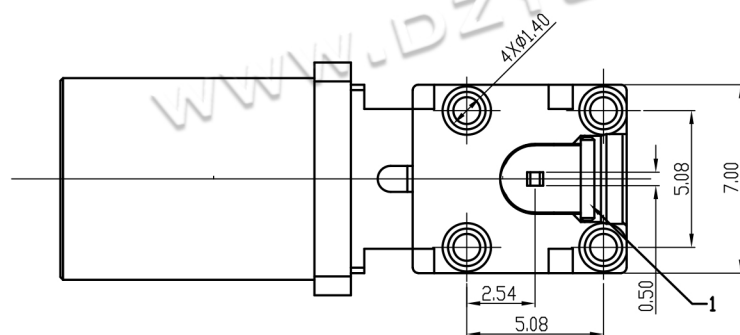

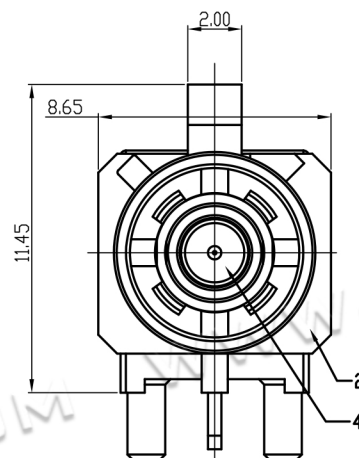


P.C.B LAYOUT

1. PERFORMANCE:

- 1.1: CONTACT RESISTANCE: INITIAL VALUE 50mOHM Max,
1.2: FREQUENCY RANGE:DC to 6GHz
1.3 VSWR: 0-6GHz 1.60Max
1.4 VOLTAGE RATING: 50V (AC/DC).
1.5: CURRENT RATING: 1A/PIN.
1.6: INSULATION RESISTANCE: 1000MOHM Min.
1.7: MATING CYCLES: 25 TIMES Min.
1.8: OPERATING TEMPERATURE: -40℃~+105℃


4	MOLDING	THERMOPLASTIC+BRASS	BLACK+PLATING GOLD	1
3	BODY	ZINC ALLOY	PLATING Sn	1
2	HOUSING	THERMOPLASTIC UL94V-0	ACCORDANCE WITH THE REQUIREMENTS	1
1	STATOR	BRASS	PLATING Sn	1
NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY

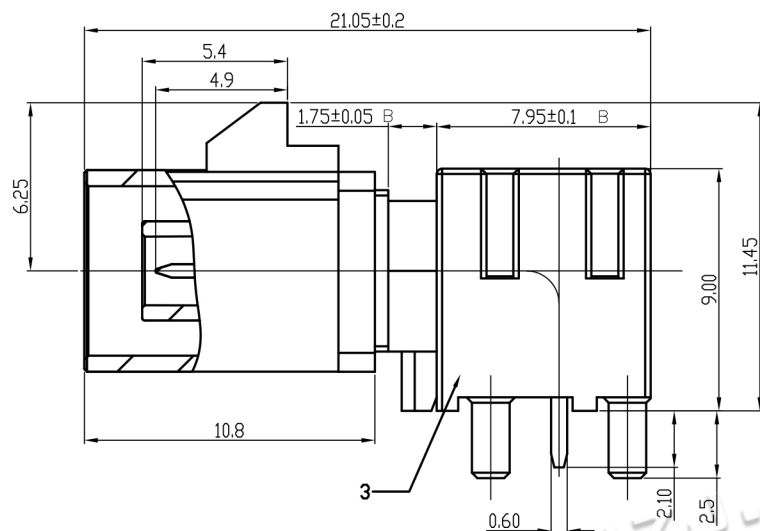

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2° X.X* ±0.5°		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 卧式 FAKRA插座	
 UNIT: mm [inch]		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-703A2-82X
		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	HYC-2412041505
SCALE:1:1	SIZE: A4			SHEET NO.	1 OF 1

HYC-703A2-820 A TYPE JET BLACK/9005	HYC-703A2-821 B TYPE CREAM 9001	HYC-703A2-822 C TYPE SIGNAL BLUE5005	HYC-703A2-823 D TYPE CLARET VIOLET/4004	HYC-703A2-824 E TYPE LEAF GREEN/6002	HYC-703A2-825 F TYPE NUT BROWN/8011	HYC-703A2-826 G TYPE BLUE GREY/7031	HYC-703A2-827 H TYPE HEATHEA VIOLET/4003	HYC-703A2-828 I TYPE BEIGE/1001	HYC-703A2-829 K TYPE CURRY/1027
HYC-703A2-82A L TYPE CARMINE RED/3002	HYC-703A2-82B M TYPE PASTEL ORANGE/2003	HYC-703A2-82C N TYPE PASTEL GREEN/6019	HYC-703A2-82D Z TYPE AQUA BLUE/5021						

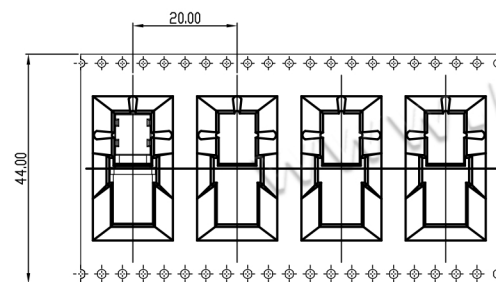

NOTE:
1.PER REEL: 220PCS

 深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 卧式 FAKRA插座
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-703A2-82X
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2412041505
			SHEET NO. 1 OF 1