



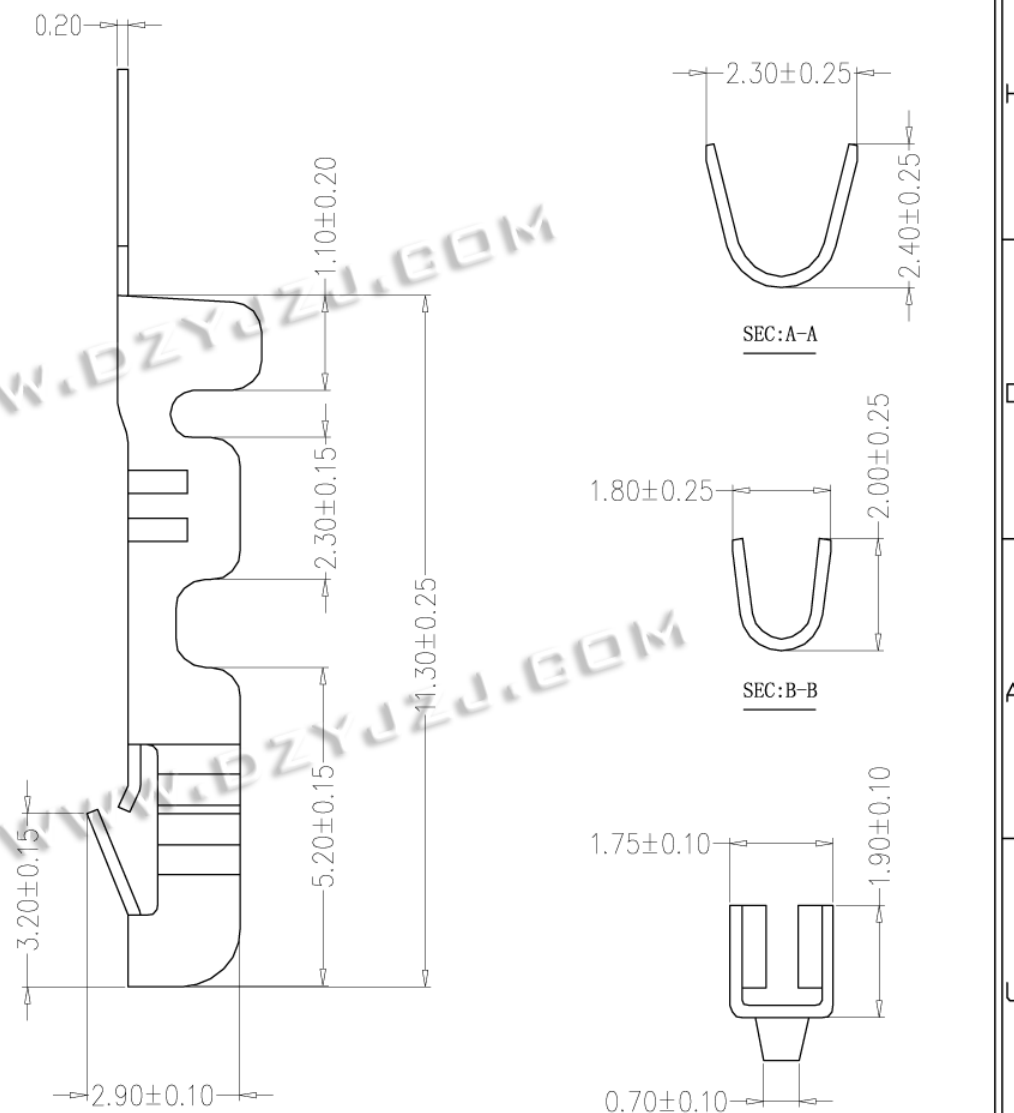



SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistancel000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material:Phosphoric bronze Tin-plated
- 8、Applicable Wire Sizes:AWG#20~26#

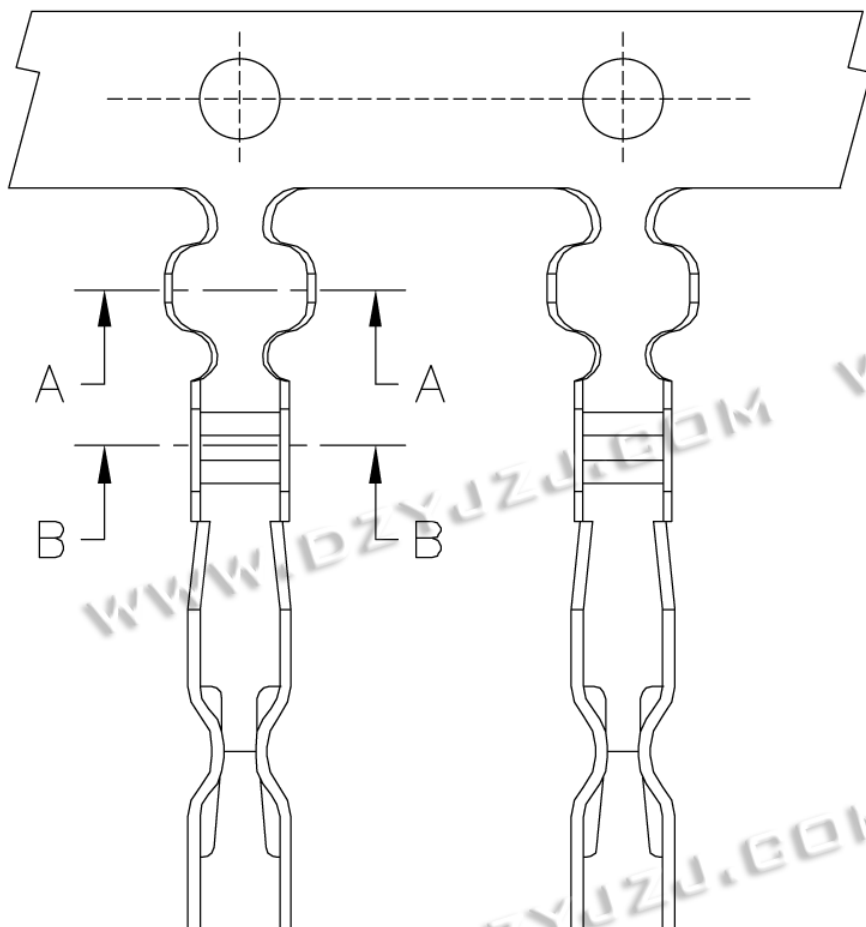

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 小四P 端子	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC18-T-113
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1

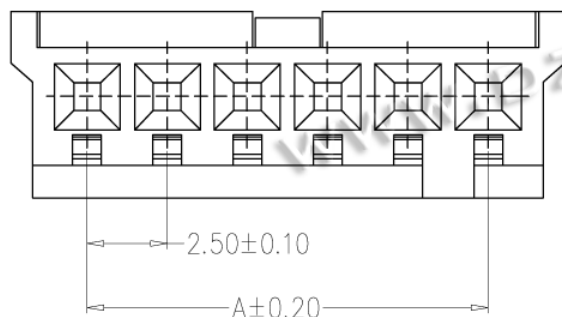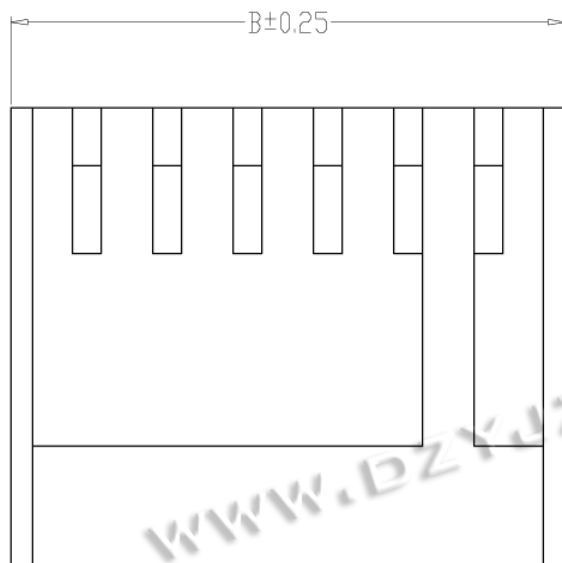

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material:Nylon66, UL94V-0

编 号	尺寸 (mm)	
	A	B
HYC18-02Y-250	2.50	7.50
HYC18-03Y-250	5.00	10.00
HYC18-04Y-250	7.50	12.50
HYC18-05Y-250	10.00	15.00
HYC18-06Y-250	12.50	17.50
HYC18-07Y-250	15.00	20.00
HYC18-08Y-250	17.50	22.50
HYC18-09Y-250	20.00	25.00
HYC18-10Y-250	22.50	27.50
HYC18-11Y-250	25.00	30.00
HYC18-12Y-250	27.50	32.50
HYC18-15Y-250	35.00	40.00




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X.* ±2* X.X* ±0.5*



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

小四P 孔座

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

SEE TABLE

MOLD NO.

APPROVED BY:

邱国夷





DATE :

2014-02-23

DRAW NO:

SHEET NO.

1 OF 1

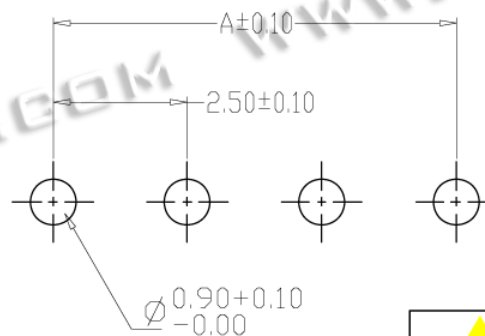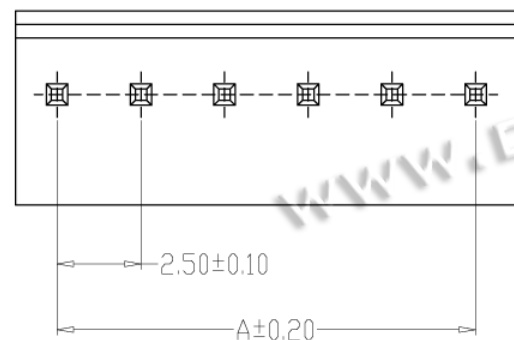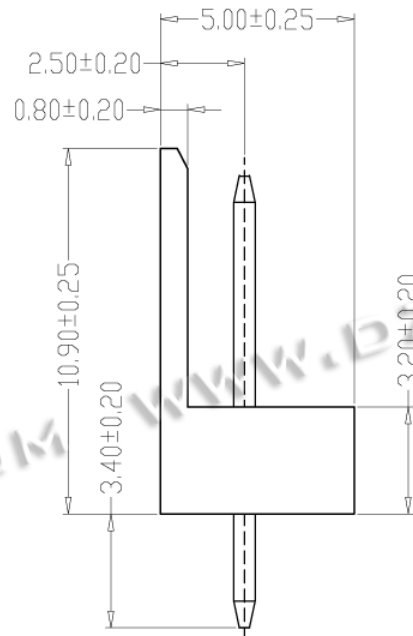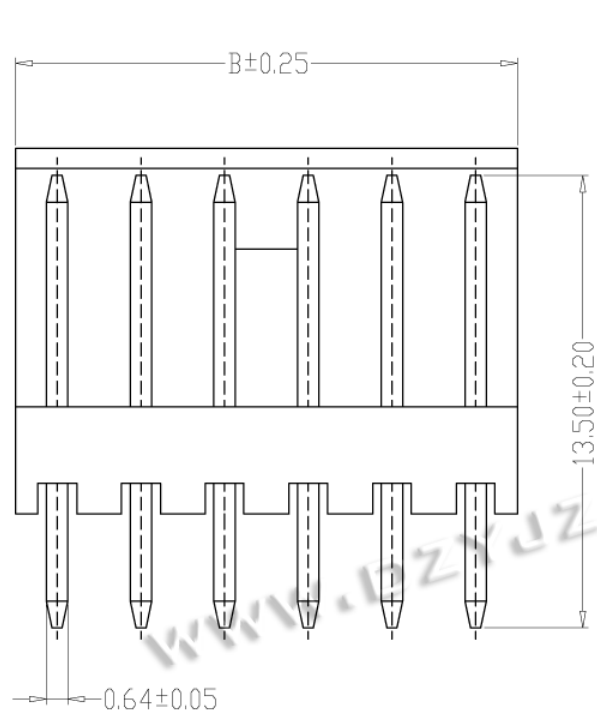

PCB LAYOUT

SPECIFICATIONS



- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HYC18-02A-250	2.50	5.00
HYC18-03A-250	5.00	7.50
HYC18-04A-250	7.50	10.00
HYC18-05A-250	10.00	12.50
HYC18-06A-250	12.50	15.00
HYC18-07A-250	15.00	17.50
HYC18-08A-250	17.50	20.00
HYC18-09A-250	20.00	22.50
HYC18-10A-250	22.50	25.00
HYC18-11A-250	25.00	27.50
HYC18-12A-250	27.50	30.00
HYC18-15A-250	35.00	37.50



深圳市华宇创精密电子有限公司



TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 小四P 直针	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	SEE TABLE
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1

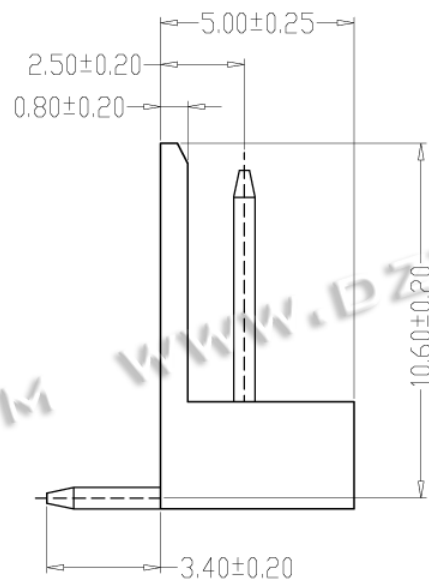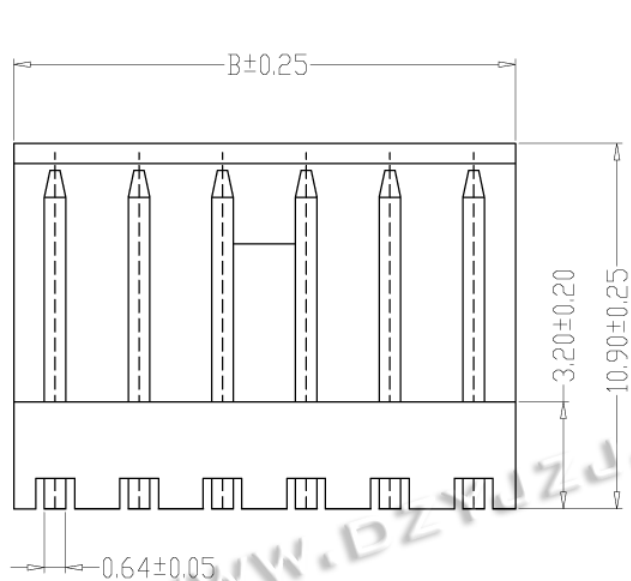

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HYC18-02AW-250	2.50	5.00
HYC18-03AW-250	5.00	7.50
HYC18-04AW-250	7.50	10.00
HYC18-05AW-250	10.00	12.50
HYC18-06AW-250	12.50	15.00
HYC18-07AW-250	15.00	17.50
HYC18-08AW-250	17.50	20.00
HYC18-09AW-250	20.00	22.50
HYC18-10AW-250	22.50	25.00
HYC18-11AW-250	25.00	27.50
HYC18-12AW-250	27.50	30.00
HYC18-15AW-250	35.00	37.50

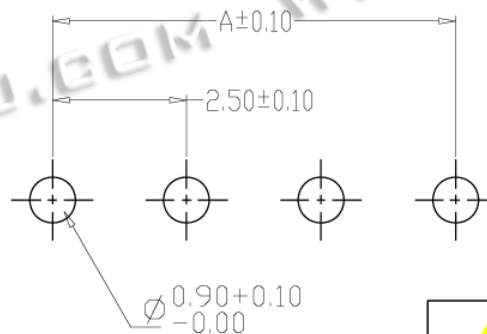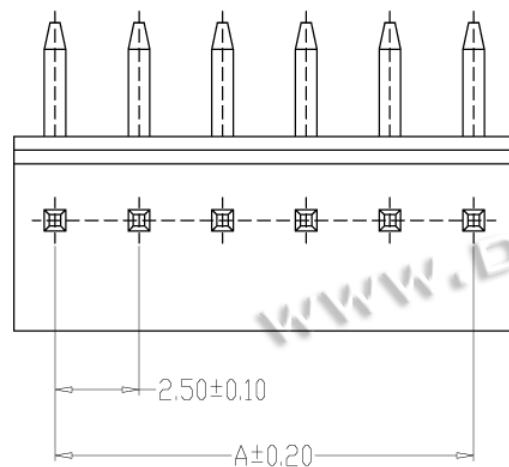


PCB LAYOUT



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$ UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 小四P 平弯	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	SEE TABLE
	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1

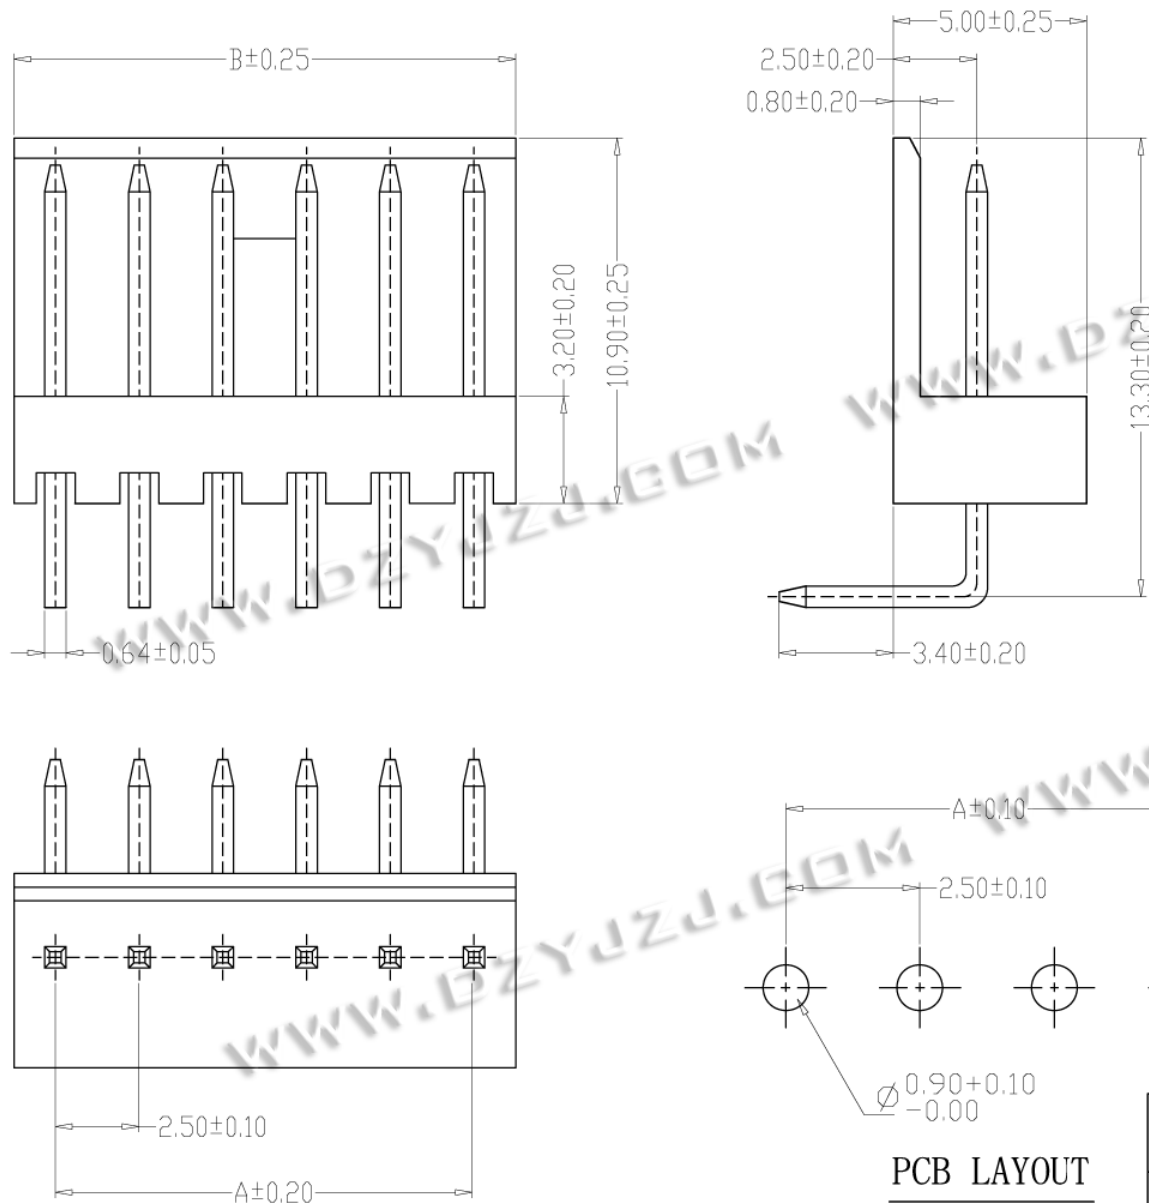

SPECIFICATIONS





- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltage: 800V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HYC18-02AWG-250	2.50	5.00
HYC18-03AWG-250	5.00	7.50
HYC18-04AWG-250	7.50	10.00
HYC18-05AWG-250	10.00	12.50
HYC18-06AWG-250	12.50	15.00
HYC18-07AWG-250	15.00	17.50
HYC18-08AWG-250	17.50	20.00
HYC18-09AWG-250	20.00	22.50
HYC18-10AWG-250	22.50	25.00
HYC18-11AWG-250	25.00	27.50
HYC18-12AWG-250	27.50	30.00
HYC18-15AWG-250	35.00	37.50



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 小四P 高弯	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	SEE TABLE
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1

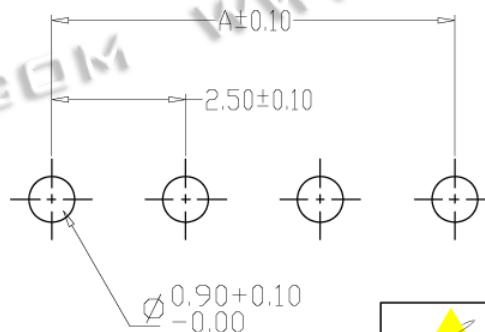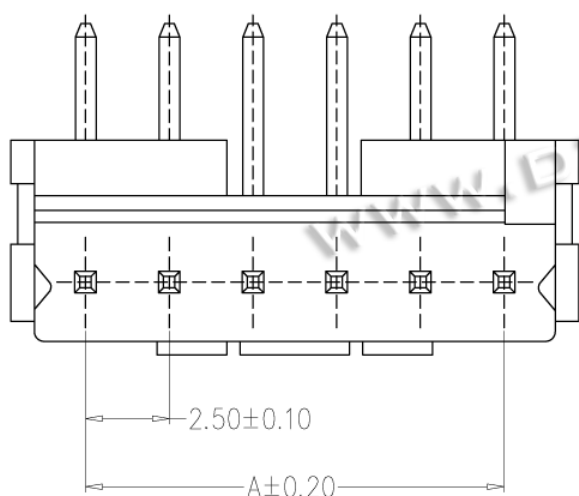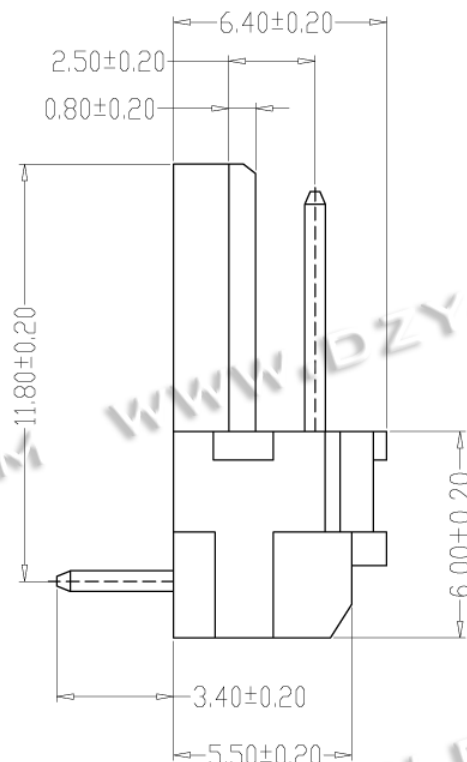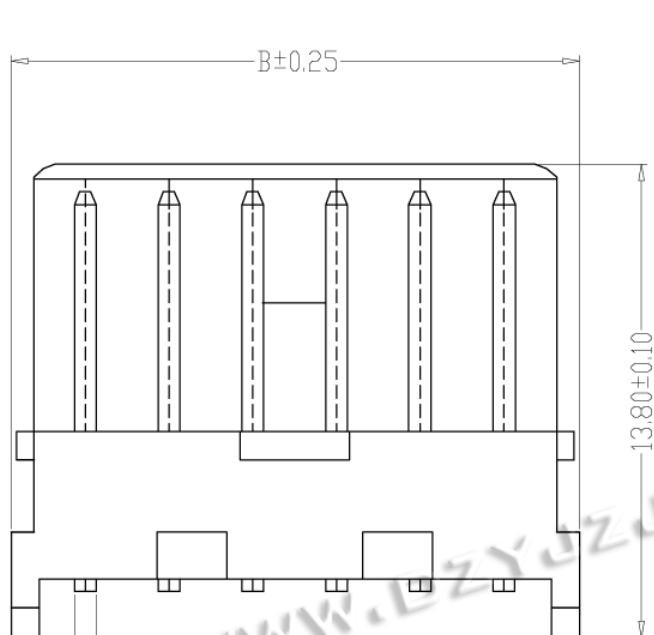

PCB LAYOUT

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperature Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltage: 800V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HYC18-02AWD-250	2.50	5.00
HYC18-03AWD-250	5.00	7.50
HYC18-04AWD-250	7.50	10.00
HYC18-05AWD-250	10.00	12.50
HYC18-06AWD-250	12.50	15.00
HYC18-07AWD-250	15.00	17.50
HYC18-08AWD-250	17.50	20.00
HYC18-09AWD-250	20.00	22.50
HYC18-10AWD-250	22.50	25.00
HYC18-11AWD-250	25.00	27.50
HYC18-12AWD-250	27.50	30.00
HYC18-15AWD-250	35.00	37.50



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5" UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 小四P 定位弯针	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	SEE TABLE
	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1