




NOTES:

1. MATERIAL SPECIFICATION:
1-1. HOUSING: LCP+40%GF, UL94V-0, PANTONE BLACK.
1-2. CONTACT: C1065-SPING.
2. PLATING SPECIFICATION:
2-1. CONTACT:
50u" MIN. NICKEL UNDER PLATING OVER ALL.
Au 1u" Min PLATING ON CONTACT AREA
Sn 80u" Min PLATING ON SOLDER AREA.
3. HF COMPLIANT, ROHS COMPLIANT.
4. DATE CODE: XXXXXX
DAY
WEEK
YEAR
5. MECHANICAL PERFORMANCE:
5-1. DURABILITY: 25 CYCLES.
6. ELECTRICAL PERFORMANCE:
6-1. CURRENT: 0.5A PER PIN.
6-2. LLCR: INITIAL 55mΩ MAX. ; FINAL ΔLLCR=20mΩ MAX..
7. IR REFLOW:
THE TEMPERATURE SHALL BE 260+6/-0°C MAINTAINING 10+1/-0 SECONDS.

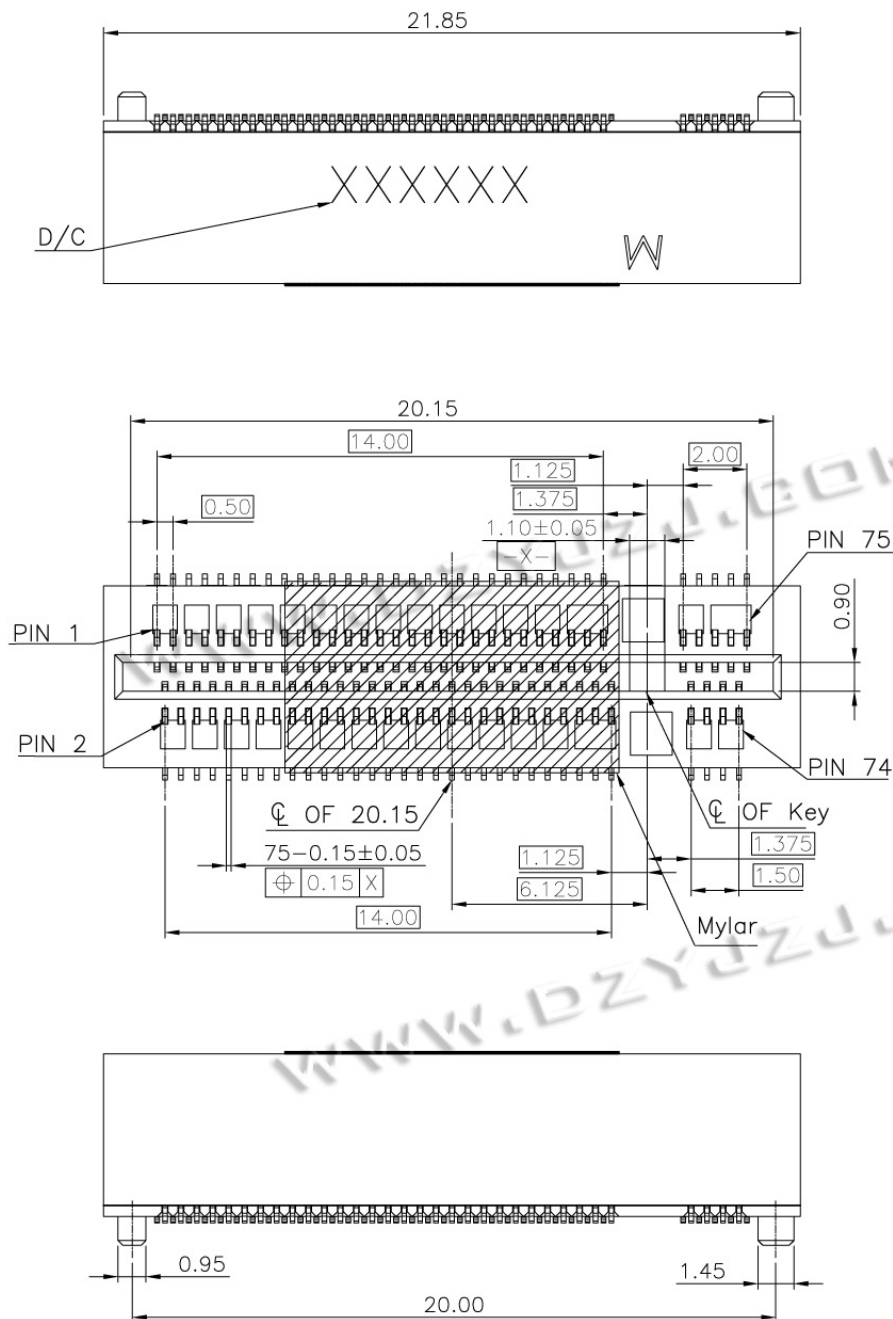

深圳市华宇创精密电子有限公司

TOLERANCE:

x.x ±0.30
x.xx ±0.25
x.xxx ±0.15
x' ±2' x.x' ±0.5'



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

VERTICAL M.2 0.5PTICH(KEY M)

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC19M-05NGFF-530

MOLD NO.

APPROVED BY:

柯南

DATE :


2014-02-23

DRAW NO:

HYC-1804101726

SHEET NO.

1 OF 1

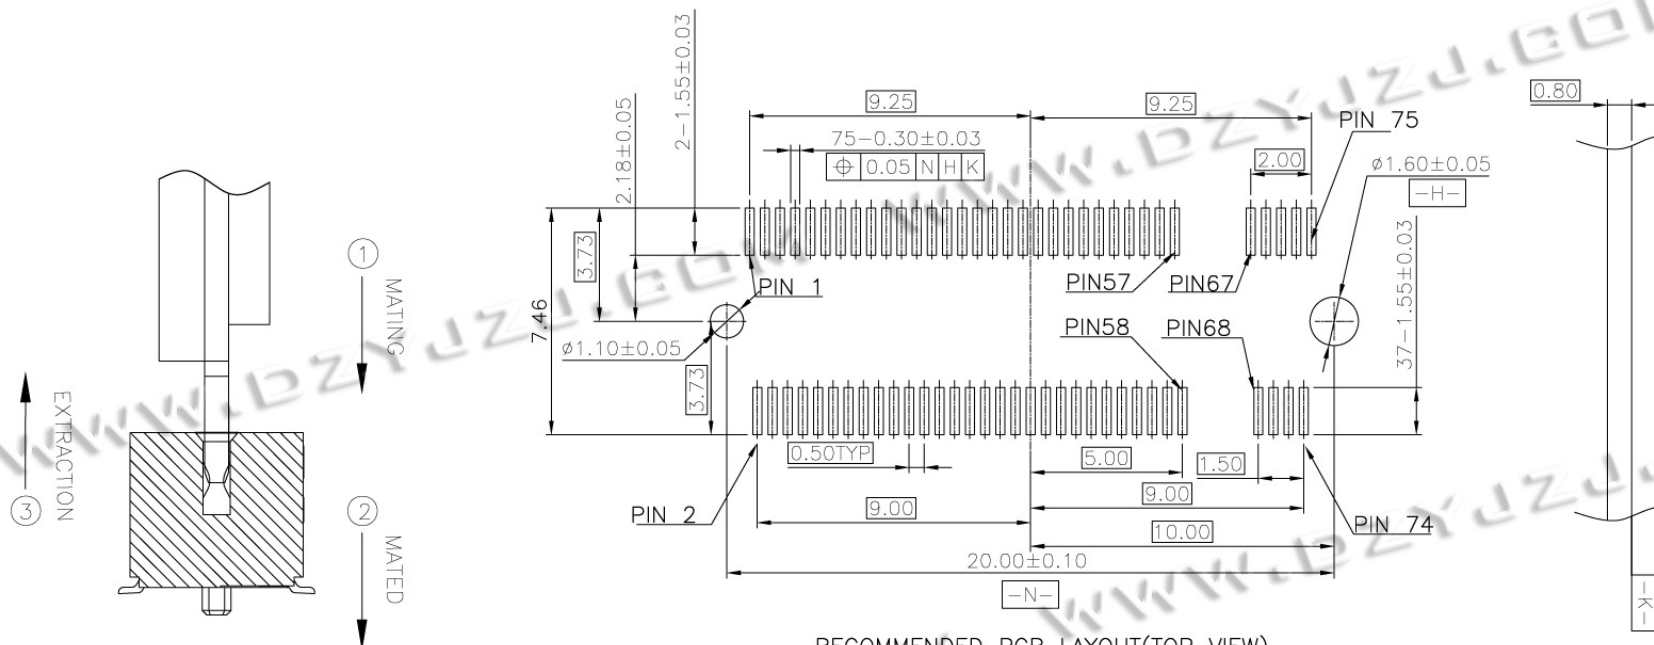

RECOMMENDED PCB LAYOUT(TOP VIEW)
DEFAULT TOLERANCE $\pm 0.05\text{MM}$

HOW TO MATE AND EXTRACT

MATE: ① → ②
EXTRACT: ③




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15

X' $\pm 2'$ X.X' $\pm 0.5'$



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

VERTICAL M.2 0.5PTICH(KEY M)

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC19M-05NGFF-530

MOLD NO.

APPROVED BY:

柯南

DATE :



2014-02-23

DRAW NO:

HYC-1804101726

SHEET NO.

1 OF 1

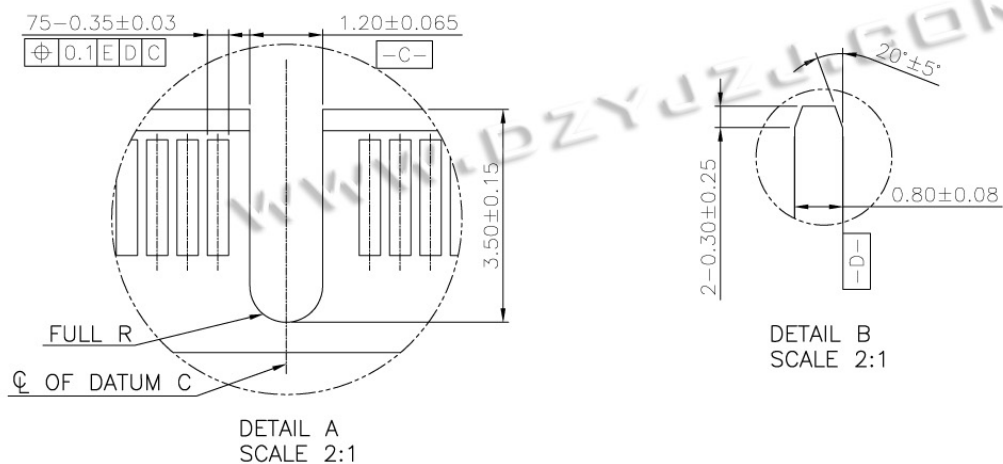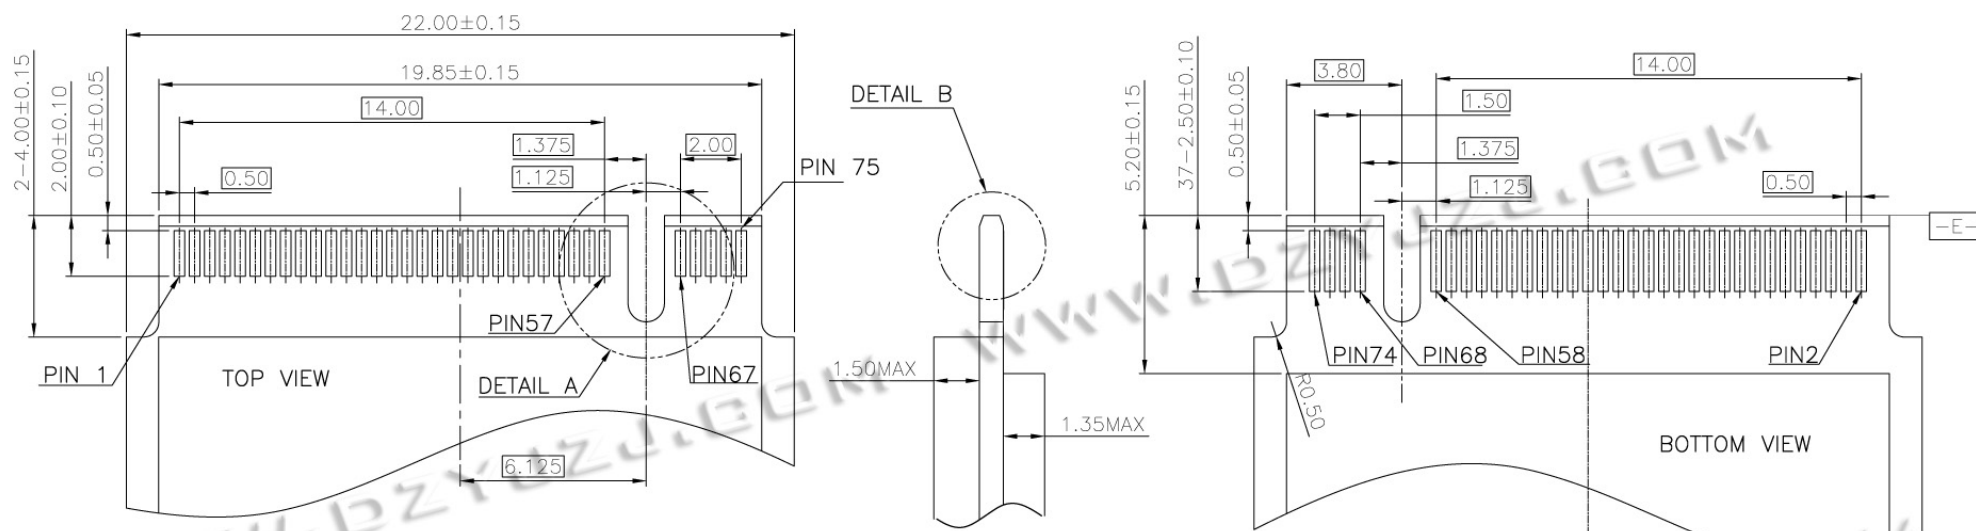

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2° X.X' ±0.5° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: VERTICAL M.2 0.5PTICH(KEY M)
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC19M-05NGFF-530
	APPROVED BY: 柯南	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-1804101726
			SHEET NO. 1 OF 1