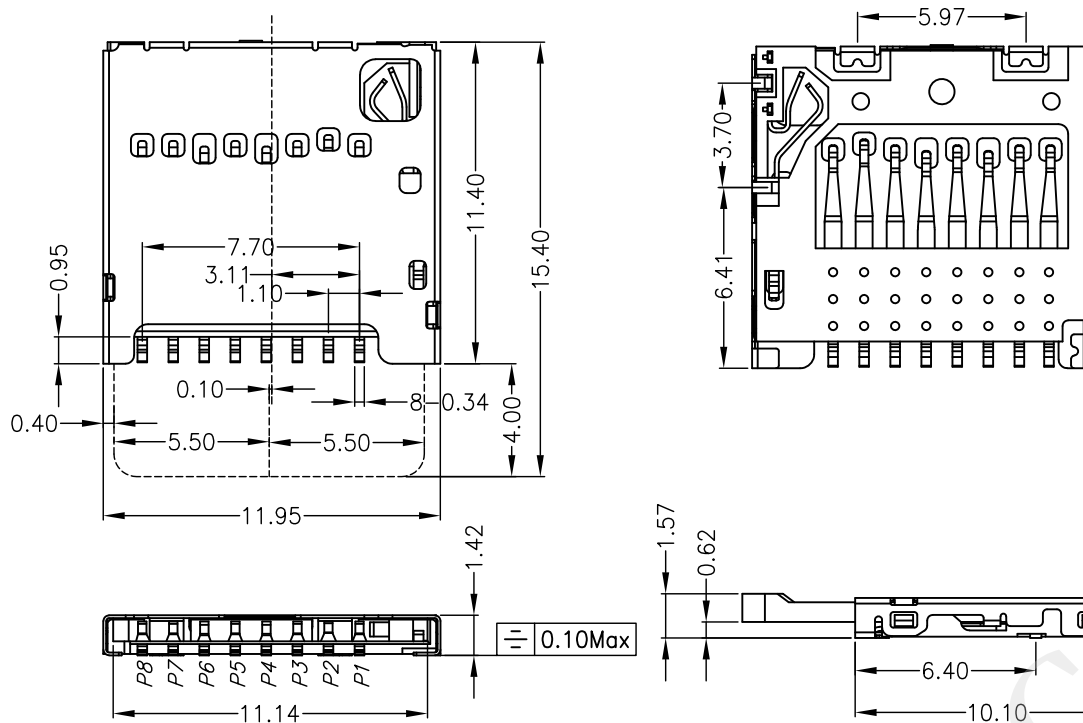


MATERIAL: Specification

Insulator: LCP High Temperature Thermoplastic, UL 94V-0.

Contact: Copper Alloy C5210

SHELL: SUS304

PLATING:

Contact: Ni All 50u", Contact area 1u Au", Pad 0.8u Au"

Shell: Ni All 50u", Pad Au"

Electrical:

Current Rating :0.5mA AC/DC max.

Voltage Rating :125V AC/DC

Ambient Temperature Range :-25° C~+85° C

Storage Temperature Range :-25° C~+85° C


Ambient Humidity Range :95% R.H. Max.

Contact Resistance:100m max.

Insulation Resistance:1000MΩmin./500VDC

Mating Cycles:5,000 Insertions

产品耐温温度: 260° C

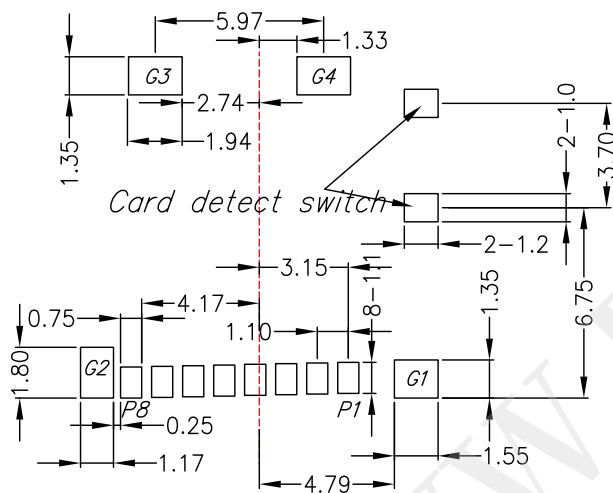

Recommended PCB Layout

General tolerance ±0.05

Card insertion Condition	Card detect switch	Circuit Switch terminal Detect terminal
Without Card	Open	
Card insertion	Close	


PIN NO.	PIN ASSIGNMENT
P1	DAT2 信号
P2	CD/DAT3 信号
P3	CMD 数据输入
P4	VDD 电压/电
P5	CLK 时钟
P6	VSS 接地
P7	DAT0 信号
P8	DAT1 信号




深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X" ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: TF NO PUSH 内焊1.42H 带检测P	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC172-TF08-142	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO: HVC-2411280949	
			SHEET NO. 1 OF 1	

- 一.
- 1) 將成品一一放入包裝盤內, 依同一方向放入.
 - 2) 包裝時, 如圖所示.
 - 3) 一個包裝盤放置2000個成品.

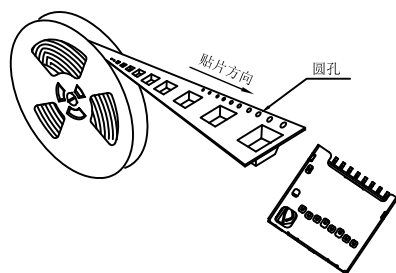


- 二.
- 1) 一只紙箱可放置5個包裝盤.
 - 2) 一只紙箱可放10000PCS的成品.
 - 3) 將成品放入包裝盤內包裝完後再裝箱.

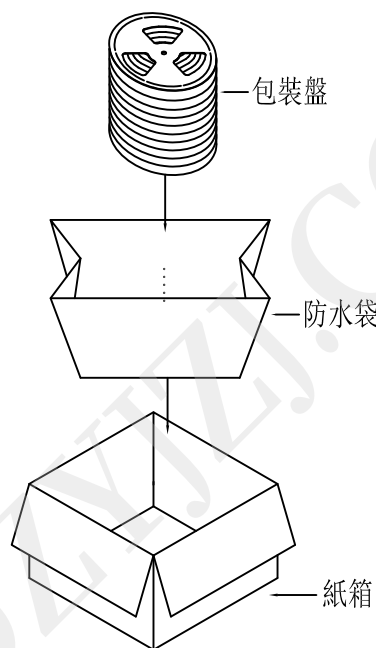

产品单重: 0.3g
每盘单重: 660g
每箱单重: 3600g (10000PCS)
纸箱规格: 350*350*155 (10000PCS每箱)

- 三.
- 1) REL載帶尺寸圖.

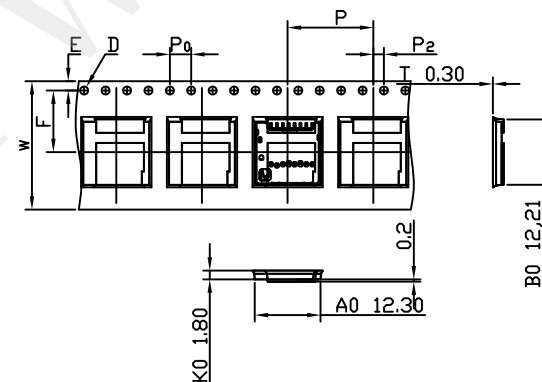

W	24.00	$\begin{smallmatrix} +0.30 \\ -0.30 \end{smallmatrix}$	P	16.00	$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$	A ₀	12.30	$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$	B ₀	12.21	$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$
S		$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$	P ₀	4.00	$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$	A ₁		$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$	B ₁		$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$
E	1.75	$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$	P ₂	2.00	$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$	A ₂		$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$	B ₂		$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$
F	11.50	$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$	D ₀	Ø1.50	$\begin{smallmatrix} +0.10 \\ -0.00 \end{smallmatrix}$	K ₀	1.80	$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$			
T	0.50	$\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	D ₁		$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$	K ₁		$\begin{smallmatrix} +0.10 \\ -0.10 \end{smallmatrix}$			



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5* UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1