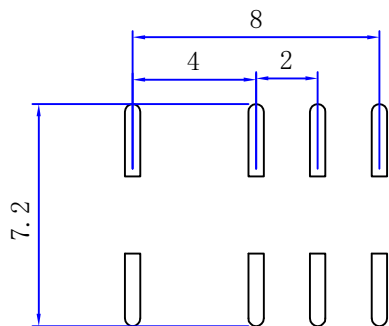
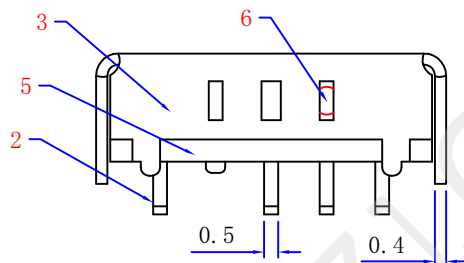
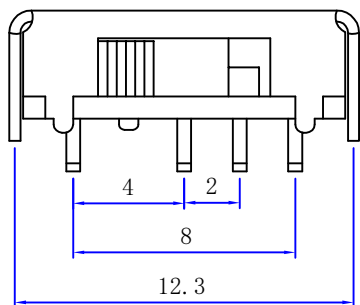
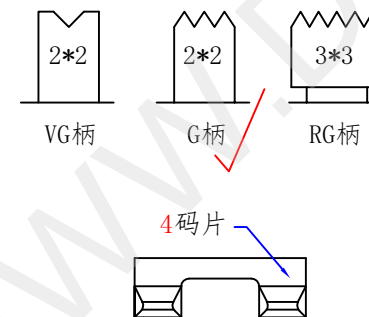
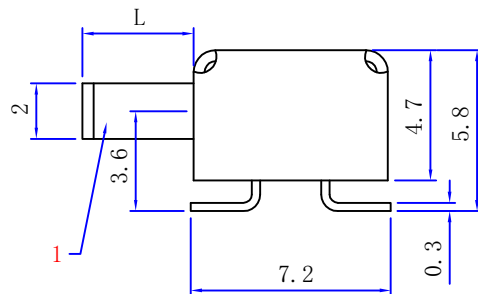
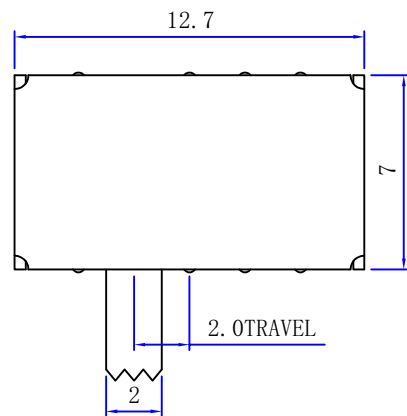


SCHMATIC

L=

2

3

4

5

6

7

8

电气性能参数:

1. 额定负载: DC50V 0.3A
2. 接触电阻: 100毫欧以下
3. 绝缘电阻: 100兆欧以上
4. 耐压: AC 500V
5. 力度: 300 ± 100 gf
6. 寿命: 5000次
7. 回流焊: 255 ± 5 度

6	码片	磷铜带	1	原色
5	底板	冷冲板	1	原色
4	码片	磷铜带	2	原色
3	铁壳	冷轧钢带	1	镀镍
2	端子脚	黄铜带	8	镀银
1	胶柄	P P A	1	黑色
NO.	物料组成	材质	数量	表面处理



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$

UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

拨码开关

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC-SK-23D71H-XXX

MOLD NO.

DRAW NO:

HYC-2601130946

SHEET NO.

1 OF 1